

Project:	
Type:	
Catalog #:	



STANDARD OPTIONAL

E

LISTED

DAMP

MOUNTING
CANOPY

SELF
MAGENT

MAGE

ILLUMINATION

Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.


OPTIONS

 SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

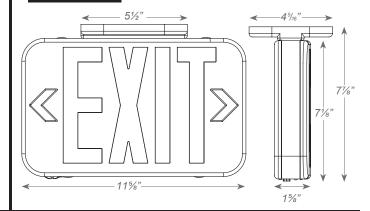

Sample Part Number: TP-ILX

ORDERING INFORMATION

SALIDA face plate option available. Check with your Best Lighting Representative.	MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		BATTERY		BATTERY	
	TP-ILX	2	Universal Single/ Double Face	R G	Red Green	W B	White Black	(blank) EM	AC Only Battery Backup	SDT	Self-Diagnostics ¹
									,		

¹ Available only with EM units.



Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT V	VATTS (W)	INPUT AMPS (A)		
	120V	277V	120V	277V	
TP-ILX -RED/GREEN EM	1.0	1.0	0.09	0.09	
TP-ILX RED SDT	2.5	2.5	0.05	0.05	
TP-ILX -GREEN SDT	2.7	2.7	0.05	0.05	