


<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	



### STANDARD

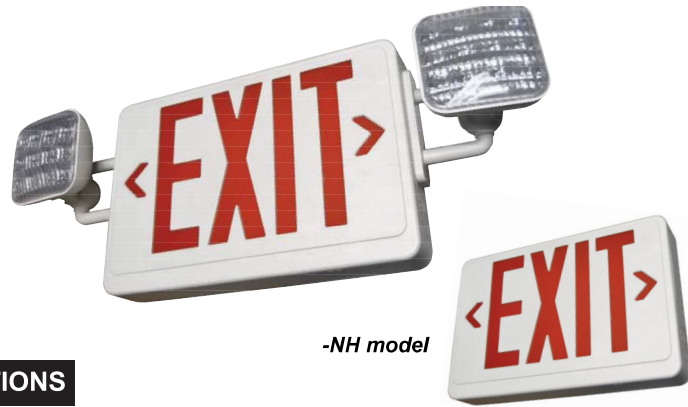

### OPTIONAL



### ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

### MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.


### OPTIONS

- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- NH: No lamp head attach to the unit enabling it to be used as remote capable exit sign.
- Custom: Signs available with requested 'special' wording.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 40°C).
- Certified to CEC under Title 20 Regulations.

### DIMENSIONS

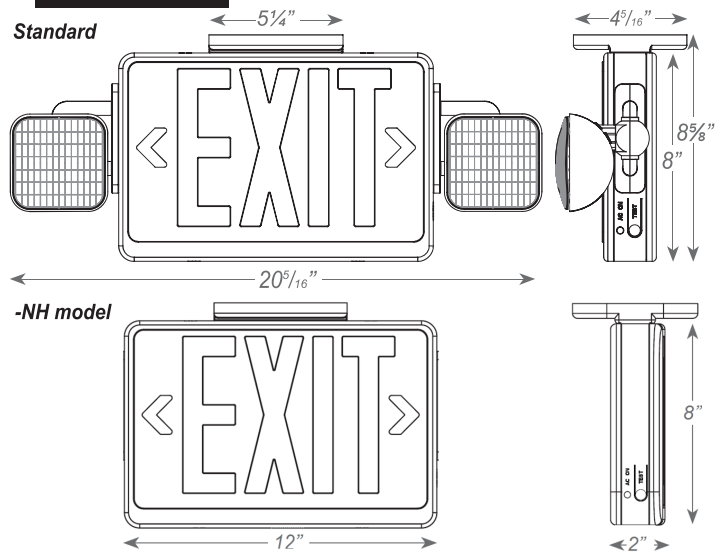

### ORDERING INFORMATION

Sample Part Number: TPC-LED

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
TPC-LED	2 Universal Single/ Double Face	R Red G Green	W White B Black	RC Remote Capacity HL High Lumen NH No Lamp Heads SDT Self-diagnostics CUSTOM Custom Wording

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

**ELECTRICAL INFORMATION**

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
TPC-LED-GW-RED	3.7	3.8	0.040	0.020
TPC-LED-RW-GREEN/RC	3.0	3.2	0.030	0.014
TPC-LED-GB-RED-RC	3.4	3.6	0.033	0.015
TPC-LED-RB-RED/GREEN-SDT/RC-SDT	5.2	5.7	0.046	0.022

**REMOTE LAMP COMPATIBILITY**

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			MRHLED	RHLED	RH16LED	RH16		RH		RHR		SRH		SRHLED	
				MV		6V	12V	6V	12V	6V	12V	6V	12V		
TPC-LED-RW-RC-SDT	9.6V	3W-4W		X	X										
TPC-LED-RW-RC	9.6V	3W		X	X										
TPC-LED-GW-RC-SDT	9.6V	6W		X	X										