

EXPEL POINT OF USE LIQUID WATER, OIL & PARTICULATE COMPRESSED AIR FILTER



A unique patent protected product designed to revolutionise compressed air filtration

National Sales: 1300 879 613

www.pneutech.com.au

- Expel removes 99.9999% of all liquids (water & oils)
- Expel removes all particulates down to 1 micron 99.9999%
- Patents pending
- Cleanable reusable filter
- No power source required
- 2 years manufacturer's warranty
- Easy to fit / install
- Pressure indicator fitted as standard
- Option to fit pressure gauge
- Stainless Steel (304) body construction
- Multiple drain options
- Tested to ISO 12500 standards



TECHNICAL DATA

OPERATIONAL SPECIFICATION

Effective flow range for a 6 bar(g) system @ $\Delta P = 1$ Bar

Size 2 Size 10 Size 30	2.8 - 450 NI/min 129 - 2000 NI/min 163 - 6900 NI/min
Operating pressure	1 - 15 bar(g) 15 - 217 psi(g)
Operating temperature	0 to +80 ºC
Maximum recommended inlet temperature	35 ºC

MECHANICAL SPECIFICATION

Inlet/Outlet connection (female)	
Size 2 & 10	1/4" BSPT
Size 30	3/4" BSPT
Drain Connection	1/2" BSPP (male)
Weight	
Size 2	0.345 kg
Size 10 & 30	2.08 kg
Particulate removal	1 micron
Material (housing)	Stainless Steel 304
Material (internal)	ABS

FILTER ORDERING CODES


FILTER ONLY	WITH MAGNETIC AUTO DRAIN*
EXPEL-02	EXPEL-02-AD
EXPEL-10	EXPEL-10-AD
EXPEL-30	EXPEL-30-AD
	*CAST ALLOY BODY


FILTER DIMENSIONS WITH AUTO DRAINS

DIMENSIONS TOP MOUNTING

WITH STAINLESS AUTO DRAIN

EXPEL-02-AD-SS EXPEL-10-AD-SS EXPEL-30-AD-SS

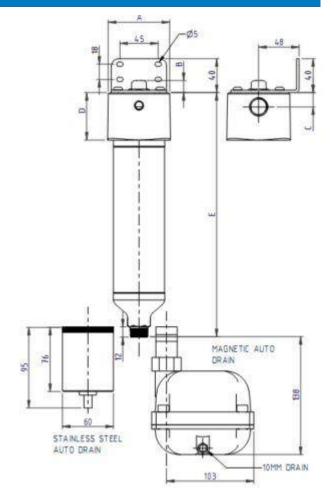



SIZE / DIMENSION	02	10	30
Α	34.5mm	72mm	72mm
В	N/A	14mm	14mm
С	9mm	17mm	17mm
D	30mm	56mm	56mm
E	150mm	293mm	293mm
F	25mm	60mm	60mm
G	35mm	80mm	80mm
н	25mm	49.5mm	49.5mm
I	25mm	49.5mm	49.5mm