

# Installation Explanation



1. Attach the double-sided tape on the inside of the side lip as shown.




2. Peel just enough of the protective film on the double-sided tape so you can hold on to the film by hand.



3. Fit the side lip piece to the vehicle as shown.



4. Remove the protective film on the double-sided tape and fit the side lip as shown.

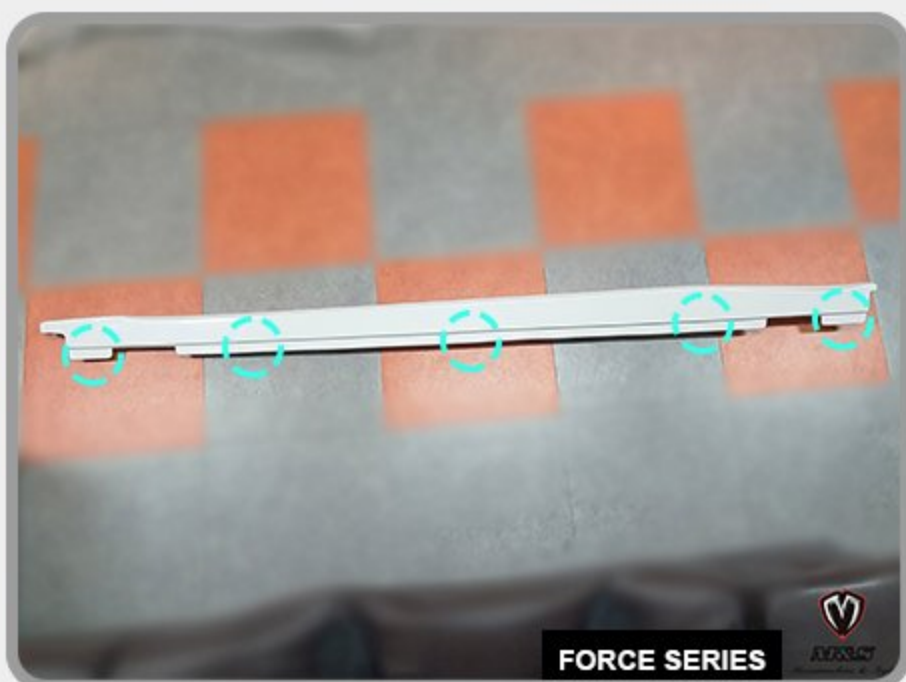

5. Fix the side lip with screws from bottom of the vehicle on the positions circled in blue.