

CE-HPP300 | CE-HPP500 | CE-HPP800

Flexi Hoses

FEATURES:

Heat Pump Pro – Full bore flexi hoses from Cool Energy
Available individually or kits with Primary Pro insulation.
Custom Branding Available

Individual Hoses:

- 300mm / 500mm & 800mm Sizes
- 1" Female BSP Connections
- 1" Washers Supplied
- A full range of end fittings available 22mm / 28mm / 35mm / Nipples ect.
- Full Bore stainless steel hose fittings
- Stainless steel braided outer sheath
- Tested to 10 Bar
- Rated for temperatures up to 90°C




Pre-insulated Kits

- Sold in pairs with 300mm / 500mm / 800mm Sizes
- Can connect directly to the heat pump
- Pre Fitted with Primary Pro UV Resistant External Lagging
- 1" Swivel Ends complete with 1" Nipples & 1"x 28mm MI Adaptors
- Compliant with Part L Building regulations for external heat pump pipework.
- Helps maintain COP's and prevent heat loss.
- Water resistant finish to the Primary pro lagging prevents the insulation from absorbing moisture.
- (This must be inspected annually and retreated with Primary Pro bond and seal if necessary)

MODEL	A	B	L
CE-HPP300	1"	28mm	300mm
CE-HPP500	1"	28mm	500mm
CE-HPP800	1"	28mm	800mm

Heat Pump Connection

Pipework Connection

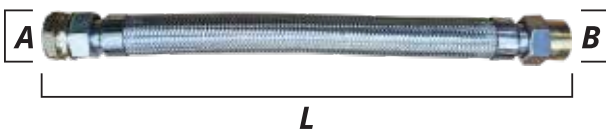

Specifications subject to change without warning.

