


# L61

## GALLERY

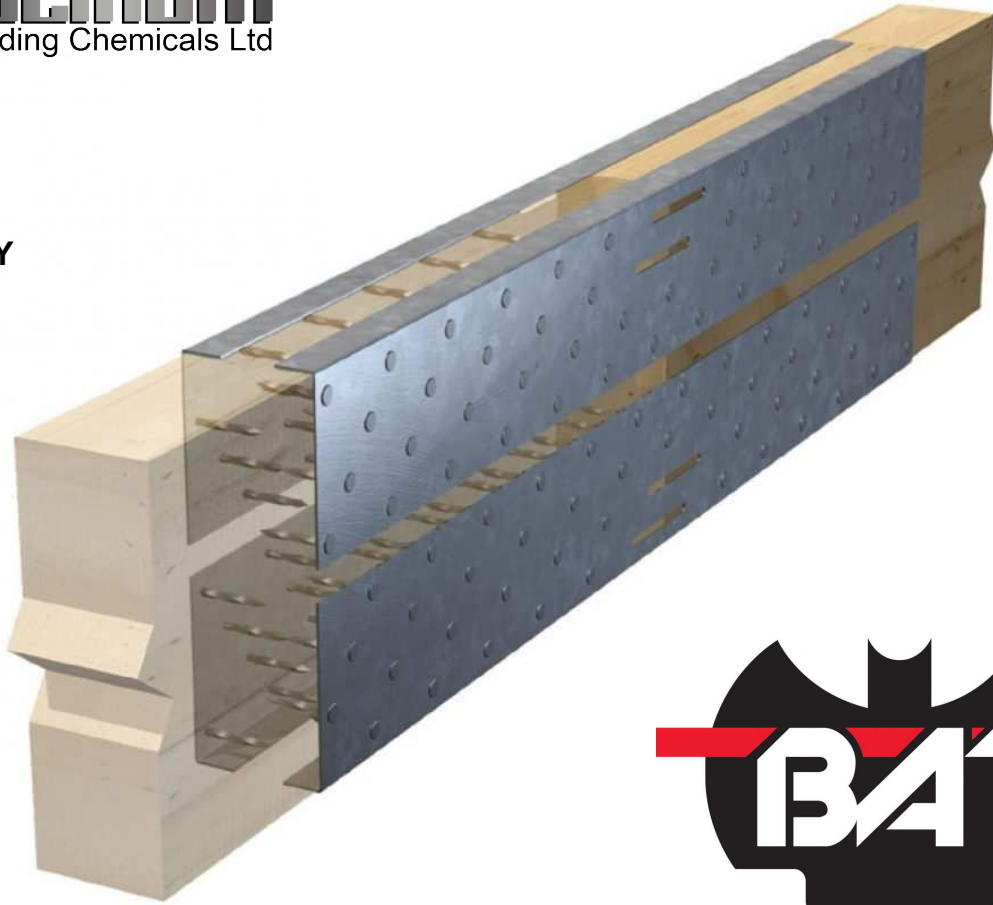

### PRODUCT ATTRIBUTES

<b>Brand</b>	Expamet BAT
<b>Generic Ref</b>	L61
<b>Product Range</b>	Builders Metalwork
<b>Product Sub-range</b>	Timber Connectors
<b>Product Type</b>	Splice Plates
<b>Material</b>	Galvanized Mild Steel DX51D+Z275 to EN10346:2015
<b>Coating/Finish/Colour</b>	275g/m <sup>2</sup> Zinc Coating
<b>Length 1/Projection</b>	400mm
<b>Length 2/height</b>	61mm
<b>Width/Wing Length</b>	18mm
<b>Plaster/Render/Joist depth</b>	125-150mm Joist
<b>Material Gauge</b>	1.2mm

<b>Individual Weight (kg)</b>	0.295
<b>Declared Loadbearing Capacity</b>	Moment Capacity 1.5kNm (SLS)
<b>Fire Rating</b>	Euroclass A1
<b>Fixing Hole Dimensions</b>	3.8mm
<b>Fixing Type</b>	3.75 x 30mm Square Twisted Sherardized/Galvanised Nails
<b>Installation requirement 1</b>	All nail holes must be filled.
<b>Installation requirement 2</b>	Gap between timbers must not exceed 6mm.
<b>Installation requirement 3</b>	Timbers must be of equal cross section +/- 2mm.
<b>Installation requirement 4</b>	4 Plates must be used per splice connection.
<b>Unit of Sale EAN</b>	5014316003698
<b>Sales Qty</b>	32
<b>Packaging material</b>	Cardboard
<b>Carton Ref</b>	TSPL98
<b>Carton/Size</b>	608 x 178 x 120
<b>Packaging weight</b>	0.376
<b>Packaged transit weight</b>	9.816
<b>Features/Benefits 1</b>	275g/m2 Gavanized Coating
<b>Features/Benefits 2</b>	Saves replacing full joists when only the ends are damaged