


# ECLIPSE

F-053L

54" Ceiling Fan

# WAC SMART FANS

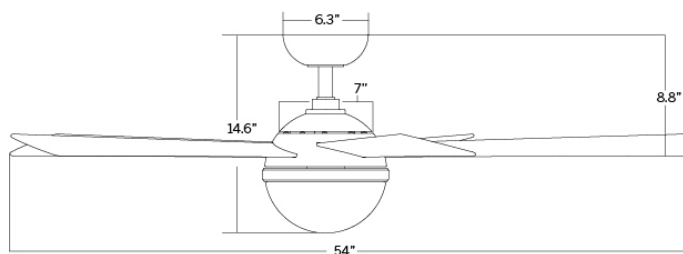

## PRODUCT DESCRIPTION

This smart fan eclipses conventional ceiling fans in more ways than one. Eclipse integrates functionality, innovation, advanced technology and a stylish aesthetic that is visually compelling. Offered in three architectural finish combinations.

## FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Luminaire cover not included
- Includes remote control with wall cradle (RC20-WT)
- Wall control for 3, 4-way control sold separately
- Compatible with WAC Smart Fans app

## AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM:	3263/5106
Weighted-Average/High Energy Use (W):	25/36
Estimated Yearly Energy Cost (\$):	7
High Efficiency (CFM/W):	133
Max RPM:	152

## ORDER NUMBER

Model	Housing/Trim	Blade
F-053L	SB Soft Brass/Soft Brass	MB Matte Black
	SB Matte White/Soft Brass	MW Matte White
	BN Matte Black/Brushed Nickel	MB Matte Black

## F-053L-\_\_

Example: F-053L-SB/MB

\*This fan comes uni-pack - blade select options are not available

\* Range results may vary based on application and surroundings.

## SPECIFICATIONS

Construction:	Steel, Plywood
Blade:	13.5° Pitch, 54" sweep
Downrod:	3/4"W X 4.5"H included
Mounting Slope:	Up to 30°
Wire:	80"
Hanging Weight:	14 lbs
Total Power:	56W
Standards:	UL/cUL Damp Location listed, Title 24 JA8-2016 Compliant, Title 20 Compliant, Energy Star Rated
Motor Type:	120 x 12 sensorless DC motor

## WIRELESS PERFORMANCE

Wi-Fi Range:	Up to 150 ft*
Bluetooth Range:	Up to 150 ft*

## LUMINAIRE PERFORMANCE

Light Source:	LED
Light Wattage:	19.5W
Lumens/Delivered Lumens:	1600/862
Dimming:	Integrated
CRI:	90
Color Temperature:	3000K
Rated Life:	50,000 hours

The WAC app synchronizes seamlessly with smart home devices you already own



wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# ECLIPSE

F-053L

54" Ceiling Fan

**WAC**  
SMART FANS

## OPTIONAL ACCESSORIES

<p>Bluetooth Wall Control</p>		<p><b>WC20-</b></p>	<p><b>WT</b> White</p>	<p>Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.</p>
<p>Bluetooth Remote Control</p>		<p><b>RC20-</b></p>	<p><b>WT</b> White</p>	<p>Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with WAC Smart Fans. Includes easy-to-install wall cradle and batteries.</p>
<p>Downrod</p>		<p><b>DR12-</b> 12IN <b>DR18-</b> 18IN <b>DR24-</b> 24IN <b>DR36-</b> 36IN <b>DR48-</b> 48IN <b>DR60-</b> 60IN <b>DR72-</b> 72IN</p>		<p>All our downrods are 1" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.</p>
<p>Downrod Couplers</p>		<p><b>DC-</b></p>	<p><b>BN</b> Brushed Nickel <b>MB</b> Matte Black <b>MW</b> Matte White <b>SB</b> Soft Brass</p>	<p>Connects two downrods together.</p>
<p>Sloped Ceiling Kit</p>		<p><b>SC-</b></p>		<p>Designed to accommodate buildings with steeper sloped ceilings up to 45o or 12/12 pitch.</p>

Examples: Wall Control - **WC20-WT**, Remote Control - **RC20-WT**, Downrod - **DR12-BN**, Downrod Coupler - **DC-MB**, Sloped Ceiling Kit - **SC-MW**

## SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

## SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13o	14-17o	18-21o	22-25o	26-29o	30-32o	33-35o	36-38o	39-41o	42-44o	45o
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

**NOTE:** Recommended maximum downrod length of 72" with 80" lead wire