



AIRSEA 4DV UN PLYWOOD BOX RANGE

**EXAMPLES OF
INNER CONTAINERS
EXCLUDING:
Explosives and Radioactives**

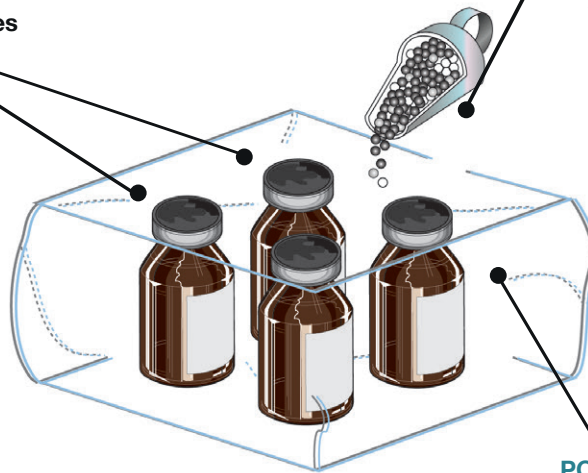

**Vermiculite
(CODE 38)**
Completely fill
the Polythene
Bag, Covering
the Product.

**POLYTHENE
LINER BAG**
Seal with 75mm
adhesive tape

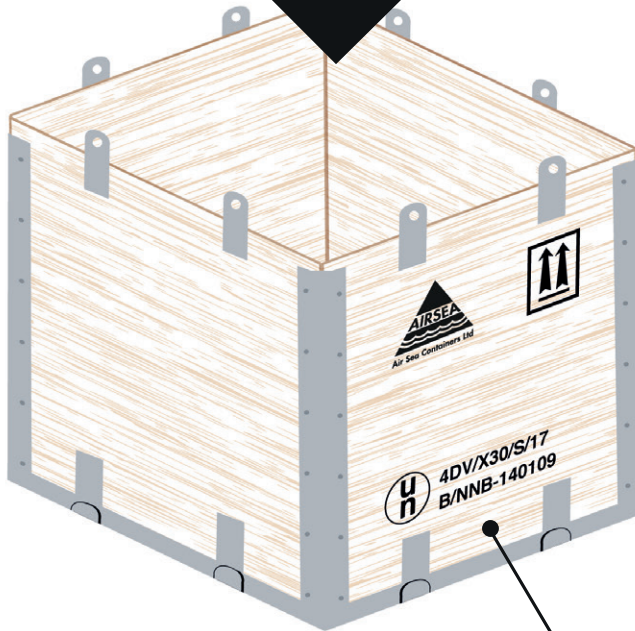

**PLYWOOD
BOX**

ASSEMBLY DETAILS:

**PLYWOOD
BOX: 4DV
OUTER PACKAGING**

CODE:1038

FOR GROUPS: I II III
X Y Z



4DV/X30/S/**

UP TO A
GROSS PACKAGE
WEIGHT OF:

30K

MAXIMUM
PERMITTED
WEIGHT OF
CONTENTS:

10K

(Product & Containers)

External Dimensions:
390 x 390 x 315mm

Internal Dimensions:
370 x 370 x 300mm

NOTES:
SEE Special **PACKAGING
DETAILS** and other
information overleaf.

Vermiculite IS Required as
absorbent filling of remaining
available space.

** Denotes year of manufacture

Adhesive tape, labels and
vermiculite can be purchased
separately from Air Sea Containers

An evenly distributed layer of
Vermiculite must cover the bottom
and top of the packing spaces.

Continued Overleaf..



PackagingSupplies.com
1120 West 130th Street Brunswick, OH 44212
Tel: 800-536-3668 Fax: 440-846-1692
email: info@packagingsupplies.com

AIRSEA 4DV UN PLYWOOD BOX RANGE

ASSEMBLY DETAILS:


PLYWOOD BOX: 4DV

OUTER PACKAGING


CODE:1038

INSTRUCTIONS FOR USE:


Refer to the illustrations on this page and overleaf.

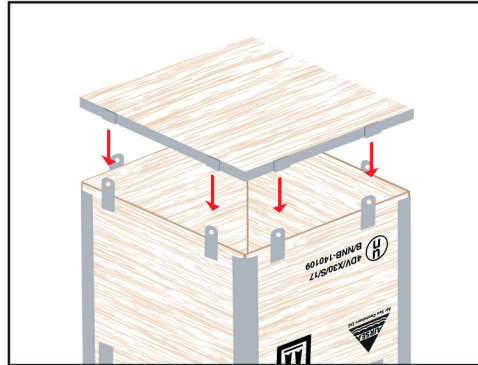


Unfold box and, ensuring all slots on base are aligned with the corresponding locking tabs, push down firmly.

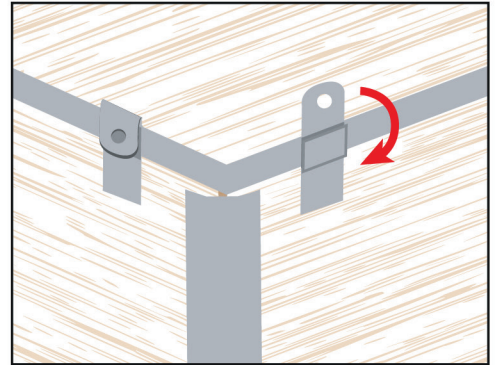


Using our special locking tab tool bend each tab into the locked position and finish off with a gentle tap. (conventional tools can also be used)

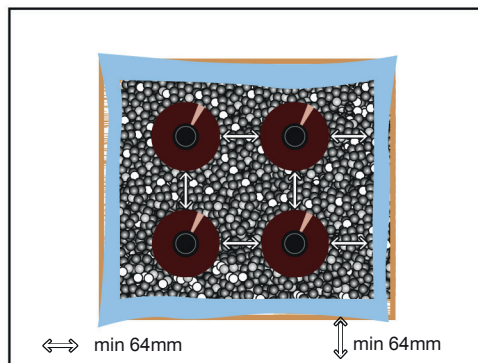

Place plastic liner bag inside box and add a minimum base layer of 35mm vermiculite before placing your inner product(s) into the box ensuring minimum spacing as shown

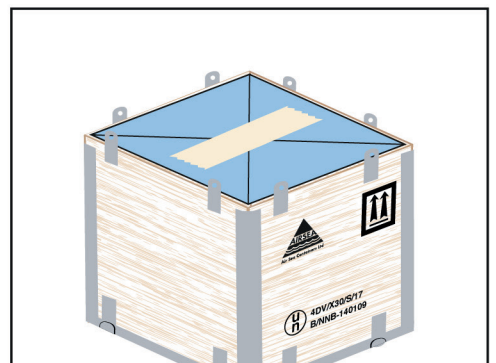

Completely fill all remaining space with vermiculite ensuring a minimum layer of 35mm vermiculite at the top of the box. Seal bag with 75mm adhesive tape.

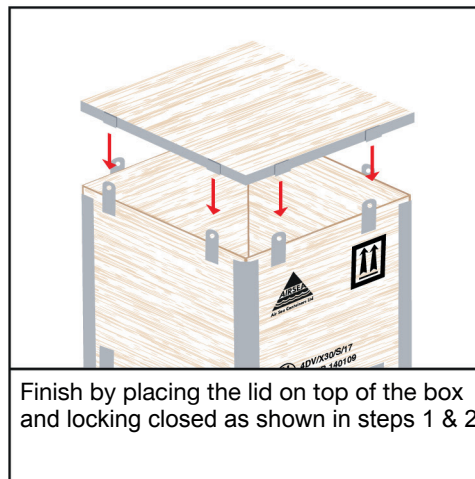

Finish by placing the lid on top of the box and locking closed as shown in steps 1 & 2.

IT IS THE SHIPPERS RESPONSIBILITY TO ENSURE ALL APPROPRIATE REGULATIONS GOVERNING THE TRANSPORTATION OF DANGEROUS GOODS ARE STRICTLY FOLLOWED.

Our PLYWOOD RANGE is a special 4DV OUTER PACKAGING approved under U.N. Test criteria which allows transport of NON-SPECIFIED INNER CONTAINERS and their contents up to a stated maximum weight."

In PLYWOOD 4DV/X30 the maximum permitted weight of the INNER CONTAINERS AND THEIR PRODUCT CONTENTS *must not exceed* 10.0 KILOGRAMS, whilst the GROSS PACKAGE WEIGHT *must not exceed* 30.0 KILOGRAMS.

PLYWOOD 4DV/X30 *must be assembled and packed strictly as instructed* and is then approved for the transportation of Packing Groups I, II, III, (X, Y, Z) Dangerous Goods.

CLASS 1 EXPLOSIVES OR CLASS 7 RADIOACTIVES MUST NOT BE PACKED IN THIS BOX.

 **PackagingSupplies.com**

PackagingSupplies.com
1120 West 130th Street Brunswick, OH 44212
Tel: 800-536-3668 Fax: 440-846-1692
email: info@packagingsupplies.com