

The pump is a horizontal multistage pressure system pump supplied wired and ready to install. Used especially for supplying water to domestic installations.

The pump is characterised by:

- Automatic electronic pump control fitted and wired.
- Automatic electronic control provides run dry protection and constant pressure at low flows. Automatic electronic control has auto restart and in-built check valve.
- Corrosion resistant pump body, diffuser and impeller.
- Mechanical shaft seal.
- Stainless Steel barrel union
- Comes complete with plug and play leads.
- 240V single phase TEFC motor with in-built auto reset thermal overload.
- Flows to 145 l/m
- Heads to 59m



Electrical data:

Rated voltage:	240V
Mains frequency:	50 Hz
Rated output:	1.3kW
Current:	8.7 amps
Capacitor:	40uF
Motor duty:	Continuous
Motor type:	Asynchronous, TEFC
Motor protection:	In-built thermal overload
Ingress protection:	IP 55
Insulation class:	F
Power cable length:	1.2 m H07RNF
Gross weight:	20 kg
Pump Dimensions:	446 x 178 x 385 mm (L x W x H)

2 Year Bianco Pumpz Warranty

Liquid:



Clean water temperature range: 2-50 °C

Materials:

Pump body, Diffuser, Impeller:	Stainless Steel
Mechanical seal:	Carbon/Ceramic/Nitrile
O rings:	Nitrile

Installation:

Maximum ambient temperature:	50 °C
Maximum operating pressure:	8 bar
Pipe connections suction/discharge:	1.1/4" BSP F / 1" BSP M

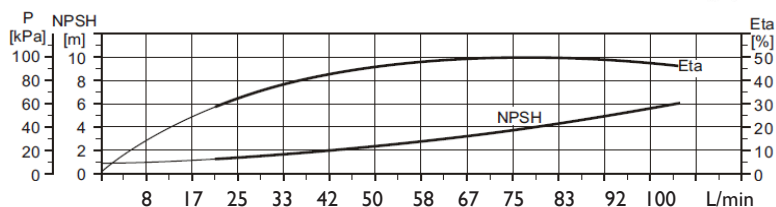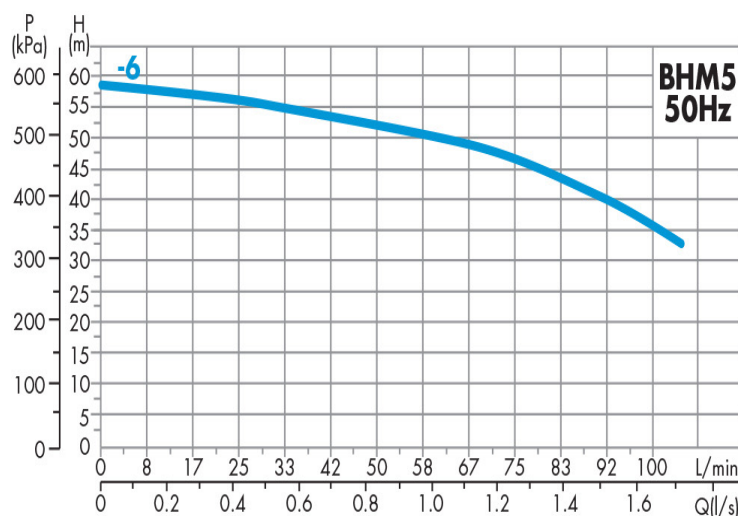

Also available:
BHM3-4MPCX, BHM3-6MPCX,
BHM5-4MPCX

