



Experts in water.

DAVEY

APPLICATIONS

Ideal for pumping clean, non-volatile liquids without fibres or solids in such applications as:-

- Dairy washdown
- Small scale irrigation
- Water transfer
- Washing systems
- Pressure boosting

WHY CHOOSE THE Davey CY70 Series Transfer Pump?

- Pump is manufactured from all stainless steel components to handle high water temperatures (80°C) making it ideal for dairy washdown
- TEFC motor is corrosion resistant and excludes dust and dirt
- Motor and pump designed for frequent starts
- Quick and easy installation
- Low maintenance
- Easy to service if required

PUMP

- Single impeller design.
- Closed vane 304 stainless steel impellers.
- Captive teflon neckring.
- 316 stainless steel pump shaft.
- 304 stainless steel casing.
- Mechanical shaft seal.
- Oring casing seal.

MOTOR

- 2 pole, 50Hz (220-240V).
- TEFC with IP55 enclosure.
- Class F insulation.
- Permanent split capacitor design.
- Protected against both high operating temperature and high current by a built-in automatically resetting thermal overload.



CY Series Transfer Pump


Model Numbers: CY70-75/A, CY70-90/A, CY70-110/A

Robust & compact, single-stage all stainless steel centrifugal pumps, driven by a TEFC motor. Designed for total head duties to 36m and flows to 200lpm. Able to handle hot water up to 80°C for vat cleaning.

ELECTRICAL DATA

Type	CY70-75/A	CY70-90/A	CY70-110/A
Nominal rpm	2900		
Volts / hertz / phase	220-240 / 50 / 1		
IP rating / insulation	55 / Class F		
Amps	4.5	6.5	7.4
kW (P ₁) / (P ₂)	1.10 / 0.75	1.30 / 0.90	1.40 / 1.10
Power lead	1.8m lead with Australian 3 pin plug		

HYDRAULIC PERFORMANCE

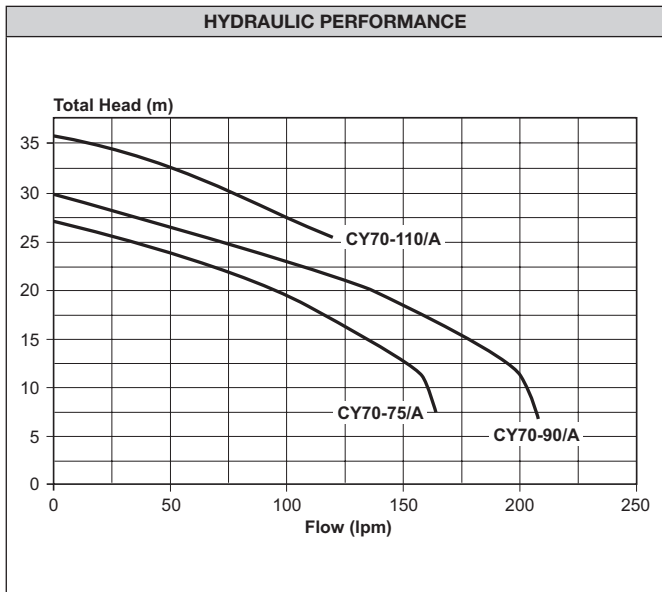

MATERIALS OF CONSTRUCTION

Part	Material
Impeller	304 stainless steel
Lock nut	304 stainless steel
Pump casing	304 stainless steel
Pump shaft	316 stainless steel
Seal ring (stationary)	Ceramic
Seal ring (rotating)	Carbon
Seal spring	304 stainless steel
Orings	EPDM
Diffuser	304 stainless steel
Neckring	Teflon
Motor shell	Aluminium
Shell finish	Polyester

OPERATING LIMITS

Model	CY70-75/A	CY70-90/A	CY70-110/A
Flow capacities to	150 lpm	200 lpm	215 lpm
Maximum total head	27m	30m	36m
Maximum suction lift	7m		
Max. water temperature continuous	+80°C		
Minimum water temperature	-15°C		
Maximum ambient temperature	55°C		
Inlet size	1 1/4" BSP(F)		
Outlet size	1" BSP(F)		
Maximum pump casing pressure	800kPa		

INSTALLATION & PRIMING

- Installations with suction lift require a good quality foot valve to avoid loss of prime.
- To prime, fill pump body and suction line through priming plug hole located above suction inlet and replace plug.

DIMENSIONS (mm)

Type	Weight (kg)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
CY70-75/A	10.0	232	343	135	92	52	1"	1 1/4"	124	108	213	52	39	9	120	158
CY70-90/A	11.0	232	343	135	92	52	1"	1 1/4"	124	108	213	52	39	9	120	158
CY70-110/A	14.5	260	410	176	97	51	1"	1 1/4"	139	121	240	60	39	9	140	180

