





LIGHTWEIGHT
8KG

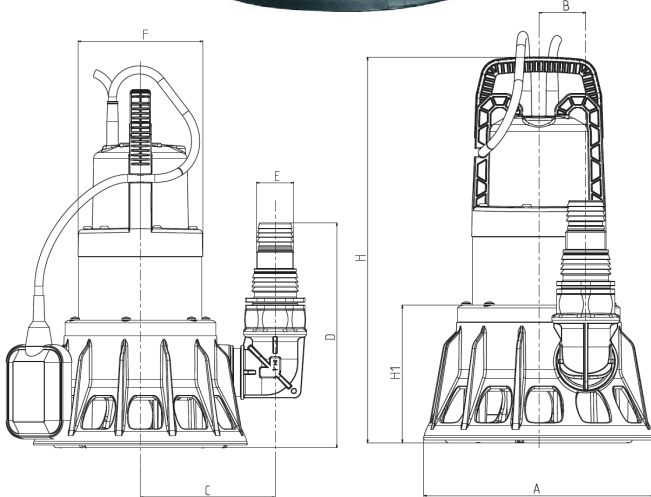

- Powerful submersible pumps for drainage and emptying duty.
- Designed for pumping foul water containing soft solid particles of no more than 38mm in diameter.
- Anti corrosion and anti-oxidation materials.
- Motor with thermal protection against overheating.
- Wear-resistant motor shaft and impeller.
- Excellent motor cooling to allow pump to run even when only partially submerged.
- Equipped with float switch for automatic starting and stopping of the pump.
- Equipped with power cable with plug, 3-level hose tail adapter without check valve and 90° Elbow.

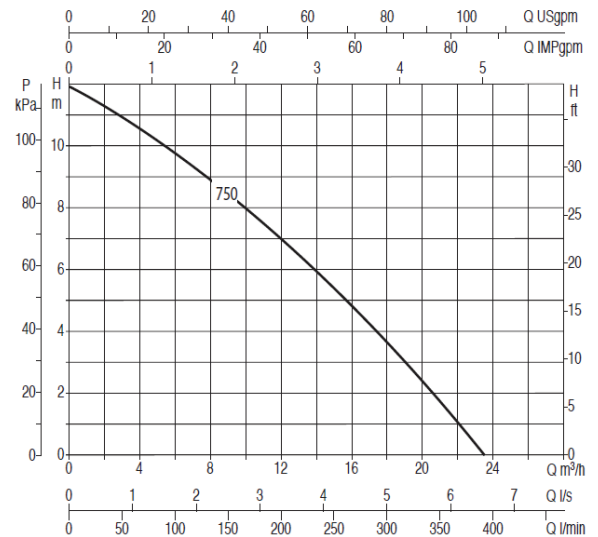

Dimensions:

	A	B	C	D	E	F	H	HI	Cable	Weight
FEKA BVP 750MA	240	49	150	250	M40	140	400	142	10m	8kg

Liquid:		Electrical Data:	
Liquid Type:	Dirty Water	Rated Voltage:	240V
Solid Handling:	38mm Ø	Rated Output:	0.75kW
Liquid Temperature Range:	0-35 °C	Power:	1HP
		Mains Frequency:	50Hz
Materials:		Current:	5.6 A
Pump Body:	Technopolymer	Capacitor:	12.5 µF
Impeller:	Technopolymer	Motor Duty:	Continuous
Elastomers:	Nitrile	Motor Type:	Asynchronous
Rotor/Shaft:	416 Stainless Steel	Motor Protection:	Built-in Thermal Overload
		Ingress Protection:	IP 68
Installation:		Insulation Class:	F
Max Ambient Temperature:	40 °C	Power cable length:	10m
Discharge Size/Pipe Connection:	1 ½" F BSP	Hydraulic Data:	
Net weight:	8kg	Max Flow (l/min):	400
Dimensions (mm):	H 400 x Dia. 240	Max Head (m):	12

