

FLO-KWIP

LC45 DATA SHEET

LIGHTWEIGHT CONTRACTOR SUBMERSIBLE PUMP
With Top Discharge



FEATURES


Compact, lightweight, submersible pump for rental, contractors, councils and builders

- ▶ Top discharge and circumferential cooling enables operation in low water levels
- ▶ Stainless steel outer case for low weight and effective cooling, powder coated
- ▶ Hytrel coated, semi-open impeller and nitrile rubber volute liner for excellent abrasion resistance
- ▶ Double mechanical seal with hard-faced sil carb primary for abrasion resistance
- ▶ Standard with 10m power cable
- ▶ Available Auto with float switch, or Manual versions
- ▶ Thermal protection on motor
- ▶ Powder coated steel strainer

TECHNICAL SPECIFICATIONS

KW	0.37
V	240V
Hz	50Hz
Max. Flow	232L/min
Max. Head	11.4m
Weight (w/o cable)	11.5
Height (with float down)	345mm
Diameter	184mm
FLA	3A
Protector	Auto-cut
Max. Fluid Temp	40°C
Max. Operating subm. Depth	10m
Discharge	50mm/2" MBSP Threaded

PERFORMANCE CURVE

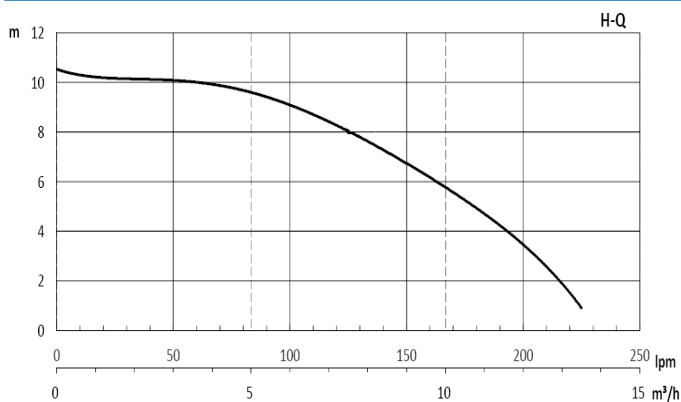

APPLICATIONS

- ▶ Hire/Rental
- ▶ Municipal/Utilities
- ▶ Contractors
- ▶ Construction
- ▶ Plumbers
- ▶ Concreters
- ▶ Cellars and Basements