

# **SSS SERIES**

# STAINLESS STEEL CENTRIFUGAL PUMP



#### **FEATURES**

Easy installation and operation

Designed by Pentair with the highest quality, performance and efficiency standards, the SSS range of stainless steel pressure pumps are suitable for a range of Agricultural, Commercial and Industrial applications

Continuously Rated

Built in Thermal Protection (only for models SSS-702, SSS-2101)

#### **MOTOR**

TEFC 2 pole motor

240V 1 Phase

Nominal speed: 2900 rpm
IP rating: IPX4
Insulation class: F
Frequency: 50Hz
Bearing type: NSK

# **MECHANICAL SEAL**

Stationary Face: Silicon carbide
Rotating Face: Graphite
Spring: 304 SS

# **APPLICATIONS**

# Agricultural Commercial Industrial Irrigation Water Transfer Wash Down

Mild Chemical use\*

\*Viton seal kits are available for mild chemical use.

# PUMP CONSTRUCTION MATERIALS

Pump Casing	304SS
Impeller	304SS
Motor Shaft	304SS
O-ring – pump casing	Nitrile

# **OPERATING CONDITIONS**

Suitable for pumping clean, nonaggressive liquids without solids or fibres in suspension

Max. Working Pressure10 BARLiquid Temp. Range85°CMax. Ambient Temp.55°C

### **PERFORMANCE**


Model	Pov	wer	l/min	0	30	40	60	80	100	120	140	160	180	200	250	300	350	400	430	480	520
	kW	HP	m³/h	0	1.8	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8	12	15	18	21	24	26	29	31
SSS 0702	0.55	0.75		29.5	27.3	26.3	23.4	19.1													
SSS 2102	1.1	1.5	11(m)	19.7						18.7	18.3	18.0	17.5	17.1	15.6	13.6					
SSS 2103	1.5	2.0	H(m)	24.2						23.5	23.2	22.8	22.4	21.8	20.2	18.0					
SSS 3703	2.2	3.0		23.1										21.7	20.9	20.0	18.8	17.2	16.2	14.2	12.3


# **ELECTRICAL**

Model		Power						
	Amps	kW	HP 0.75 1.5 2.0					
SSS7702	4	0.55	0.75					
SSS2102	6	1.1	1.5					
SSS2103	8.5	1.5	2.0					
SSS3703	12	2.2	3.0					


# **DIMENSIONS**

Madal	Ро	rts	L	w	н	L,	L,	W,	<b>H<sub>1</sub></b> (mm)
Model	DN1	DN2	(mm)	(mm)	(mm)	(mm)			
SSS 0702	11/4	1	332	210	224	119	55	149	110
SSS 2102	11/2	11/4	440	210	250	129	55	149	110
SSS 2103	11/2	11/4	440	210	250	129	55	149	110
SSS 3703	2	11/4	440	210	250	129	55	149	110





# **HYDRAULIC PERFORMANCE CURVE**

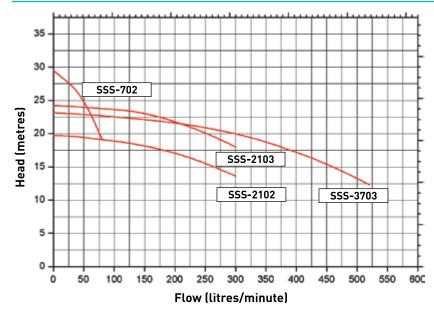



Head Office Pentair AU/NZ: 1-21 Monash Drive, Dandenong South, VIC 3175 , Australia. www.pentair.com.au

All Pentair trademarks and logos are owned by Pentair, Ltd. All other brand or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer. ABN 27 004 856 204 © 2012 Pentair, Ltd. All Rights Reserved.