

Fire Warrior



The BasicLine by Grundfos Fire Warrior range of engine driven self-priming, centrifugal pumps are robust and reliable, making them suitable for a variety of applications. Available with a quality Yanmar diesel or genuine Honda Australia engines, the standard Fire Warrior range provides efficient water transfer for a range of applications including, firefighting, irrigation, boom spraying and tank filling.

The waste water (WW) version with genuine Honda engine is ideal for handling soft solids up to 25 mm and features a quick release system for rapid and efficient removal of debris from clogged impellers. The multipurpose (MP) version with genuine Honda engine comes complete with Viton® seals, making it ideal for pumping a variety of liquids.

FEATURES

Self-priming

Ideal for transferring water from above or below ground water sources.

Roll cage

Complete with roll cage as standard, allowing for easy transportation (excluding MP 27/120 P)

Quick release system

To allow for rapid and efficient removal of debris from clogged impellers (WW 15/1000 and WW 15/1400 only)

Hose kit option

2 x 6 m (¾") hoses with fire spray nozzles
1 x 4 m (1½") grey suction hose with strainer

ENGINE FEATURES

Honda Petrol Engine

- Genuine quality Honda Australia engine
- Oil Alert System to prevent engine damage caused by insufficient oil in the crankcase (except MP 27/120)
- Built to Australian emission specifications



PUMP



HONDA
PETROL ENGINE



YANMAR
DIESEL ENGINE

Yanmar Diesel Engine

- Yanmar L70N air-cooled diesel engine
- Electric start for an easy start up
- Direct injection technology for low fuel consumption
- Designed for continuous operation in ambient temperatures up to 40°C - ideal for the harsh Australian climate
- 100 hour service intervals for low maintenance


CONSTRUCTION

Wet end materials

- Aluminium suction cover, diffuser, impeller, casing and 3 way discharge
- Carbon / ceramic mechanical seal
- Stainless steel casing bolts

PERFORMANCE GRAPH

- FIRE WARRIOR MP 27/120 P
- FIRE WARRIOR 15/600 P
- FIRE WARRIOR 15/250 P
- FIRE WARRIOR WW 15/1400 P
- FIRE WARRIOR WW 15/1000 P
- FIRE WARRIOR 55/200 P
AND FIRE WARRIOR 55/200 YDE

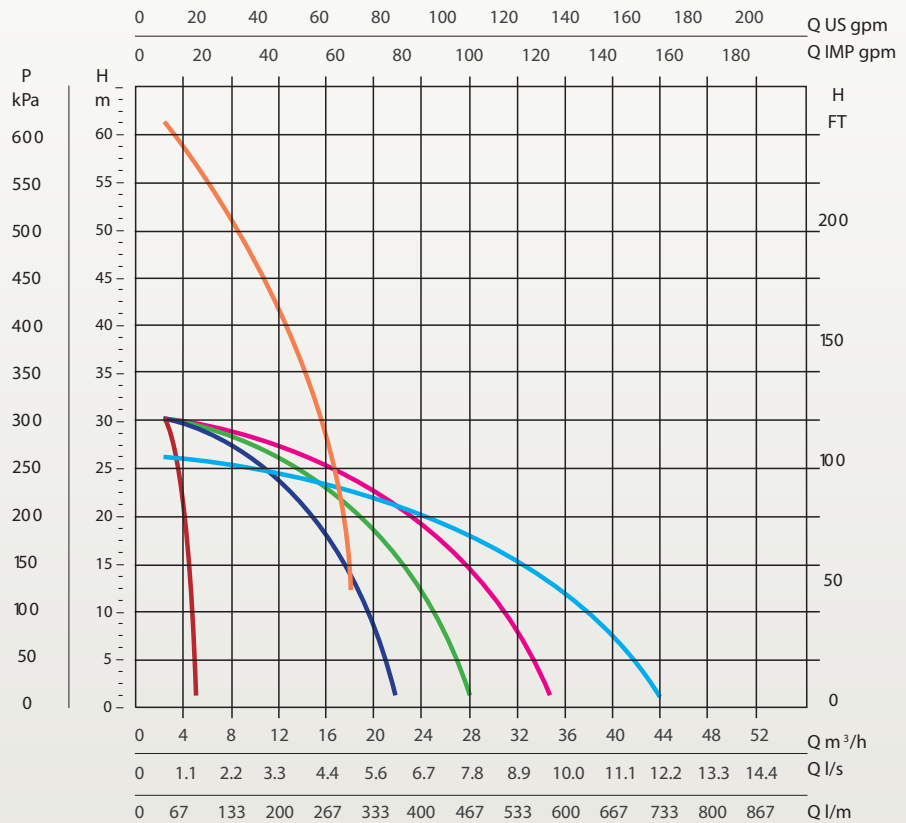

TECHNICAL DATA

Pump Model	Engine Type	Fuel Type	Start Type	Connections		Weight (kg)	Dimensions (mm)		
				Inlet	Outlet		L	H	W
FIRE WARRIOR 55/200 P	Honda GX160	Petrol	Recoil	1½" M	1 x 1½" M	24	530	420	430
FIRE WARRIOR 55/200 YDE	Yanmar L70N	Diesel	Electric	1½" M	1 x 1½" M 2 x 1" M	70	760	515	550
FIRE WARRIOR WW 15/1000 P	Honda GX240	Petrol	Recoil	3" M	3" M	52	650	417	525
FIRE WARRIOR WW 15/1400 P	Honda GX340	Petrol	Recoil	4" M	4" M	68	650	499	550
FIRE WARRIOR 15/250 P	Honda GX120	Petrol	Recoil	2" M	2" M	23	475	315	400
FIRE WARRIOR 15/600 P	Honda GX160	Petrol	Recoil	3" M	3" M	27	520	370	420
FIRE WARRIOR MP 27/120 P	Honda GX25	Petrol	Recoil	1" M	1" M	6	340	250	330

ACCESSORIES

Description	Details
FIRE HOSE KIT	2 x 6 m (¾") hoses with fire spray nozzles 1 x 4 m (1½") grey suction hose with strainer