



# DEWATERING TRASH PUMPS

## HIGH VOLUME DEWATERING

- › Highly effective Mechanical Seal made with special Carbon Ceramics provides extra durability
- › Entire unit is protected by sturdy Rollover Frame
- › Strong and lightweight die-cast Aluminium Pump



### PERFORMANCE CURVE

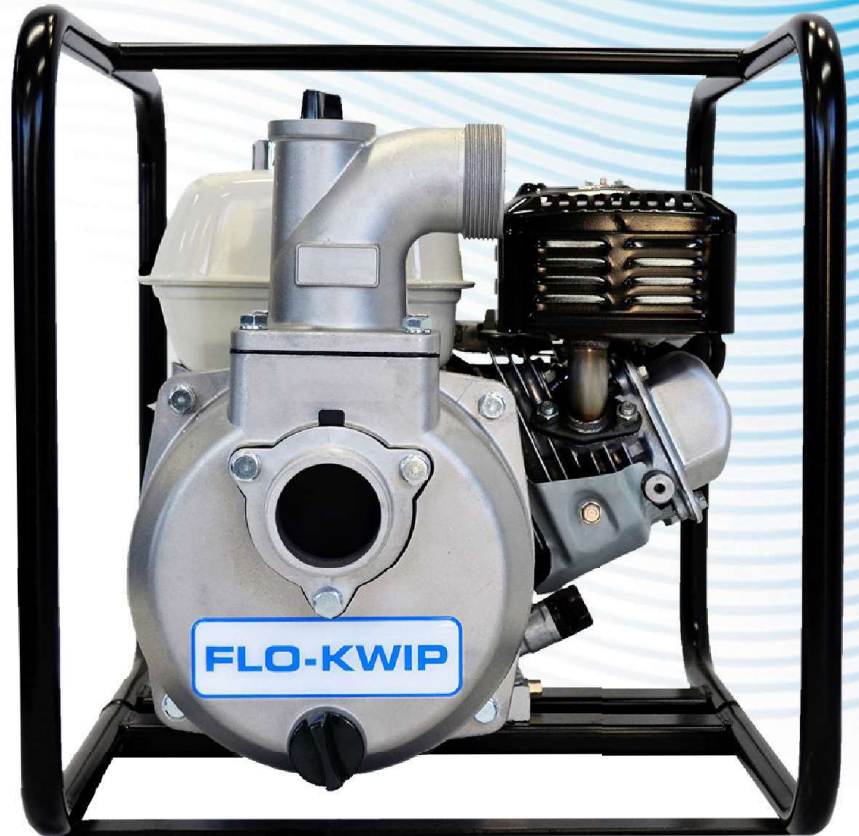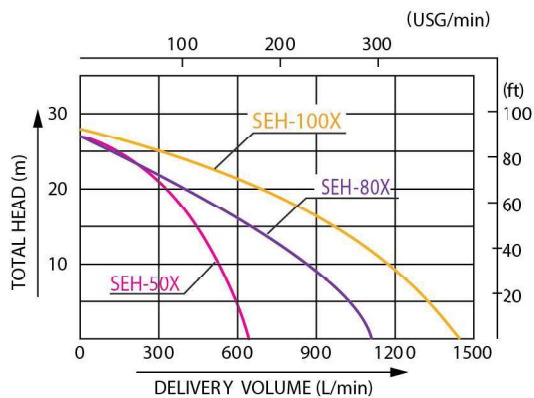

SEH-50X

### SPECIFICATIONS

	MODEL	SEH-50X	SEH-80X	SEH-100X
PUMP	Net Weight	21Kg	28Kg	54Kg
	Connection Diameter	50 mm (2")	80 mm (3")	100 mm (4")
	Connection Thread	BSP		
	Total Head	27 m	27 m	28 m
	Delivery Volume	640 L/min	1100 L/min	1450 L/min
	Max. Suction Head	8 m (26 ft)		

	Model	HONDA GX120	HONDA GX160	HONDA GX240	
ENGINE	Exhaust Volume	118 cc	163 cc	270 cc	
	Output	Rated Power	2.1kW (2.9PS) / 3600rpm	2.9kW (3.9PS) / 3600rpm	4.6kW (6.3PS) / 3600rpm
		Max. Power	2.6kW (3.5PS) / 4000rpm	3.6kW (4.9PS) / 4000rpm	5.9kW (8.0PS) / 3600rpm
	Fuel Type	Automotive Unleaded Gasoline			
	Fuel Tank Capacity	2.0 L	3.1 L	5.3 L	
	Continuous Operating Time	Approx. 2 hrs (full tank)		Approx. 2.5 hrs (full tank)	
	Starting Method	Recoil Starter			

Standard Accessories

2 Camlocks, Suction Strainer, 1 Wrench

There is no obligation to comply with these recommendations. Specifications subject to change without notice.