








# TISSEL-200 CR

CHARACTERISTIC CURVES n= 2900 min<sup>-1</sup>

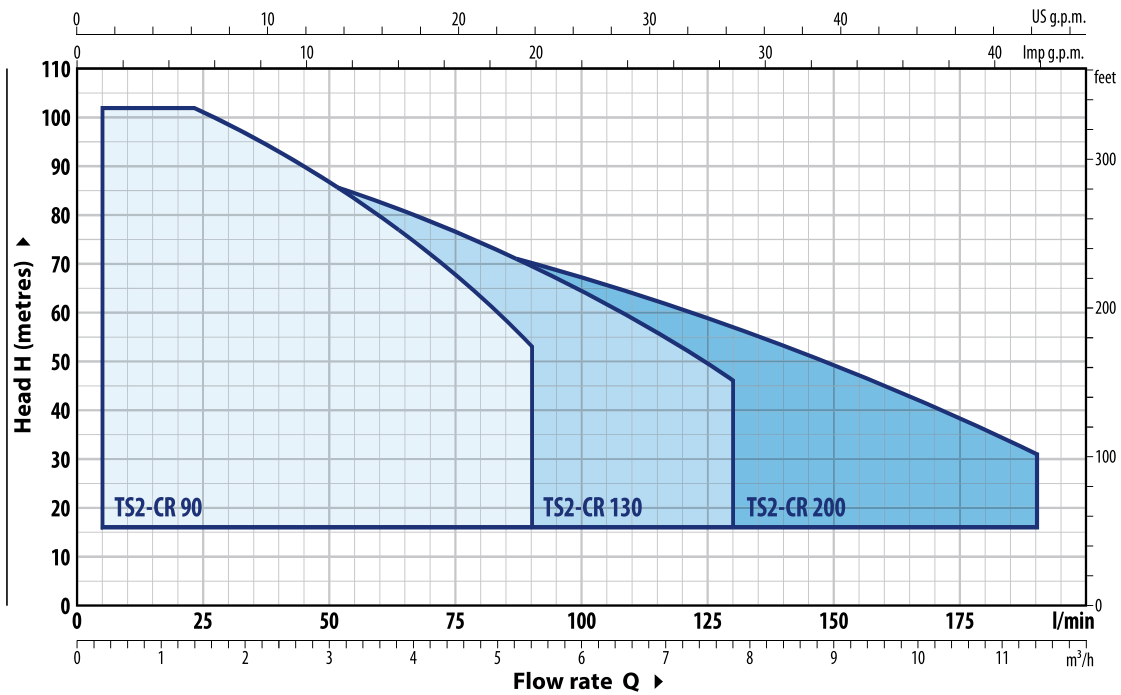

| MODEL        | POWER |     | ABSORPTION | MAX PERFORMANCES |         | PERFORMANCES (ADJUSTABLE SET POINT) |                |         |                          |         |                |        |
|--------------|-------|-----|------------|------------------|---------|-------------------------------------|----------------|---------|--------------------------|---------|----------------|--------|
|              | kW    | HP  |            | 230 V            | Q       | H                                   | Min. Set Point |         | Set Point Stand. Setting |         | Max. Set Point |        |
| Single-phase |       |     |            | l/min            | metres  | bar                                 | l/min          | bar     | l/min                    | bar     | l/min          |        |
| TS2-5CR 90   | 1.1   | 1.5 | IE3        | 13.0 A           | 5 – 90  | 78 – 38                             | 2.80           | 5 – 75  | 5.30                     | 5 – 65  | 7.10           | 5 – 23 |
| TS2-6CR 90   | 1.5   | 2   |            | 13.5 A           | 5 – 90  | 94 – 45                             | 3.40           | 5 – 75  | 6.30                     | 5 – 65  | 8.60           | 5 – 21 |
| TS2-7CR 90   | 1.8   | 2.5 |            | 16.0 A           | 5 – 90  | 110 – 53                            | 4.00           | 5 – 75  | 7.50                     | 5 – 65  | 10.00          | 5 – 21 |
| TS2-3CR 130  | 1.1   | 1.5 |            | 12.5 A           | 5 – 130 | 49 – 24                             | 1.80           | 5 – 110 | 3.40                     | 5 – 92  | 4.30           | 5 – 48 |
| TS2-4CR 130  | 1.5   | 2   |            | 14.5 A           | 5 – 130 | 65 – 31                             | 2.30           | 5 – 110 | 4.40                     | 5 – 92  | 5.80           | 5 – 45 |
| TS2-5CR 130  | 1.8   | 2.5 |            | 18.5 A           | 5 – 130 | 81 – 39                             | 2.90           | 5 – 110 | 5.50                     | 5 – 92  | 7.40           | 5 – 38 |
| TS2-6CR 130  | 2.2   | 3   |            | 20.5 A           | 5 – 130 | 97 – 45                             | 3.50           | 5 – 110 | 6.50                     | 5 – 92  | 9.00           | 5 – 33 |
| TS2-3CR 200  | 1.1   | 1.5 |            | 10.0 A           | 5 – 200 | 43 – 13                             | 1.60           | 5 – 185 | 2.80                     | 5 – 133 | 3.80           | 5 – 72 |
| TS2-4CR 200  | 1.5   | 2   |            | 13.0 A           | 5 – 200 | 57 – 17                             | 2.10           | 5 – 185 | 3.60                     | 5 – 133 | 5.10           | 5 – 65 |
| TS2-5CR 200  | 1.8   | 2.5 |            | 16.0 A           | 5 – 200 | 72 – 22                             | 2.60           | 5 – 185 | 4.60                     | 5 – 133 | 6.50           | 5 – 56 |
| TS2-6CR 200  | 2.2   | 3   |            | 22.0 A           | 5 – 200 | 86 – 26                             | 3.10           | 5 – 185 | 5.50                     | 5 – 133 | 7.90           | 5 – 45 |

**CHARACTERISTIC CURVES**  $n = 2900 \text{ min}^{-1}$

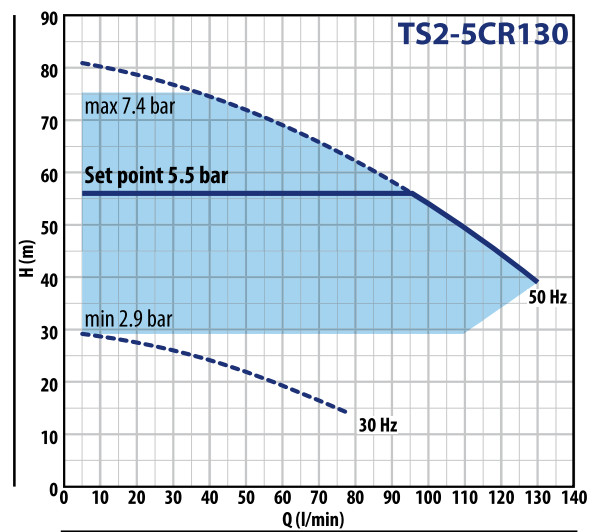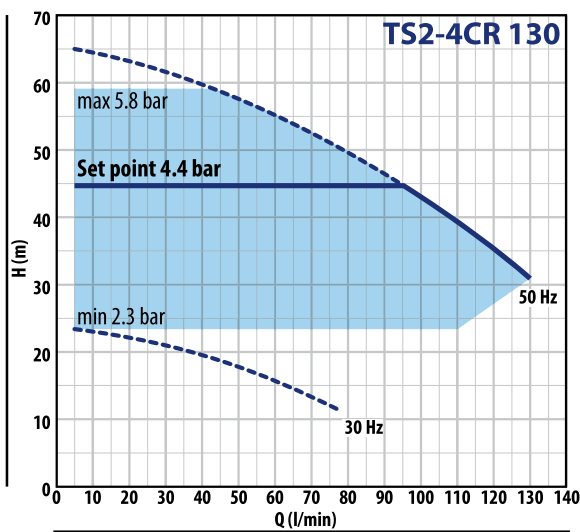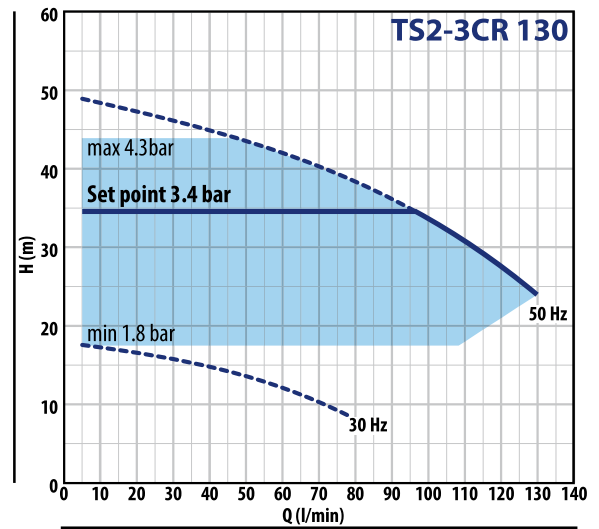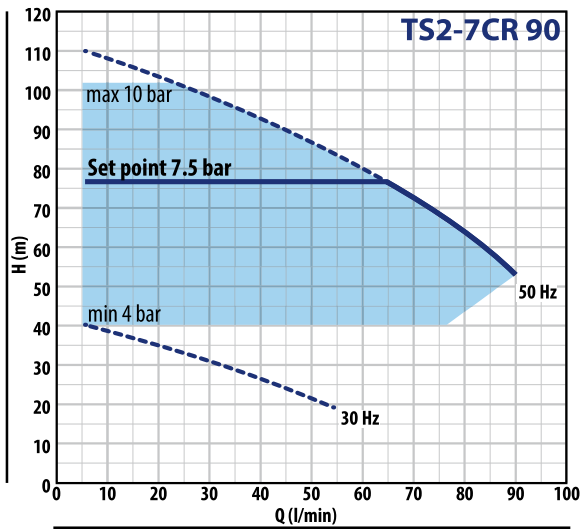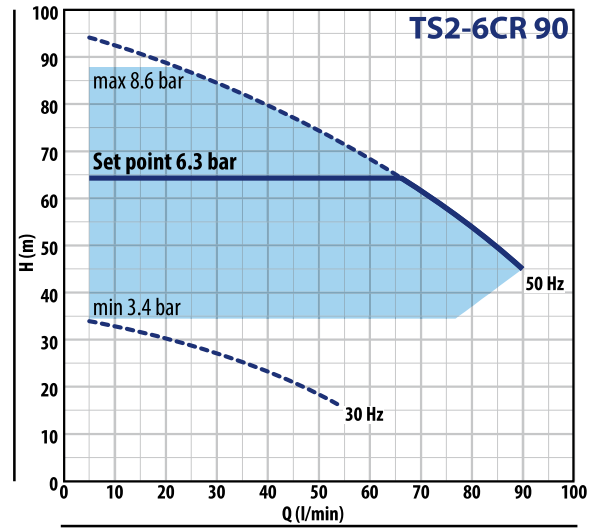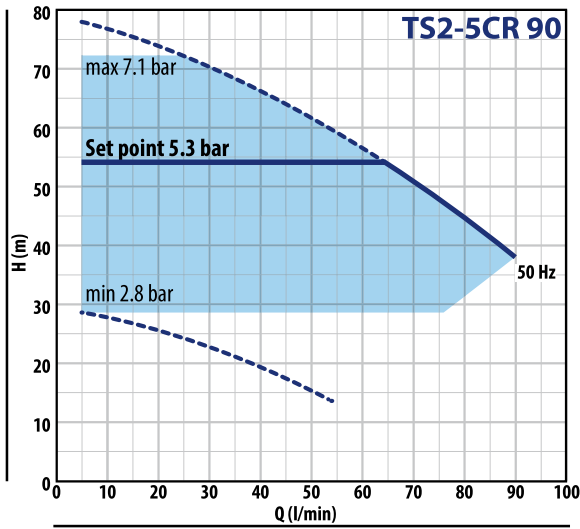

# TISSEL-200 CR

CHARACTERISTIC CURVES  $n = 2900 \text{ min}^{-1}$

