



Description

LED Post Top Light luminaire has a beautiful parachute design which is intended for outdoor school, garden walkway/pathway/yard/sidewalk lighting applications. With reliable LED driver and edged thermal management high-performance illumination that lasts over 50,000hrs, It's ideal for replacing 100-1000W metal halide HPS CFL with typical energy savings of 80%


LED Post Top Light



Features

- * Bronze aluminum housing
- * Philips /Samsung chips & Sosen / MeanWell driver
- * IP65 waterproof
- * Easy installation and operation
- * CRI >75Ra
- * CCT 5000K(standard) 3000K/4000K//6000K (special)
- * Lighting distribution: type V (standard) type II III (special)
- * Working temperature: -40°C~ 45°C
- * Eco friendly without mercury
- * Instant start, no flickering, no humming
- * Energy saving, long lifespan
- * No UV or IR
- * 5 years warranty
- * Working voltage 100-277V(standard), 200-480V(special)
- * White, black finish optional (special)
- * Bottom base Inner diameter 65mm(2.56"), outer diameter 84mm(3.3")
- * Pole mounted slip fitter (standard)

Unit:mm

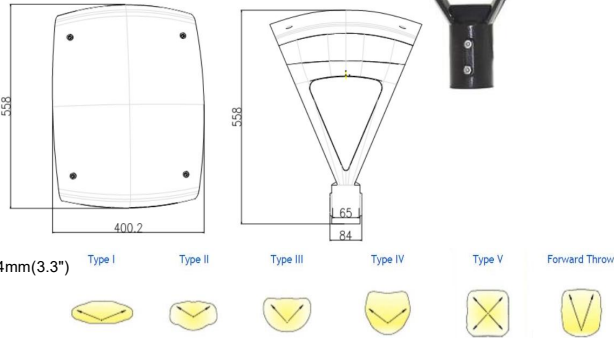


Specification

Product number	Watts	Voltage	Lumen	Dimension	LED chips	Beam Angle	IP rating	Certs	Equivalent
CH-TP500-35W	35W	100-277V (Standard) 200-480V (Special)	4,200LM	21.9"x15.7"x21.9"	Philips SMD 3030	120°	IP65	cETL ETL DLC	100-120W HID
CH-TP500-50W	50W		6,000LM	21.9"x15.7"x21.9"					150-200W HID
CH-TP500-100W	100W		12,000LM	21.9"x15.7"x21.9"					250-400W HID
CH-TP500-150W	150W		18,000LM	21.9"x15.7"x21.9"					400-600W HID
CH-TP500-200W	200W		24,000LM	21.9"x15.7"x21.9"					600-800W HID
CH-TP500-300W	300W		36,000LM	21.9"x15.7"x21.9"					800-1000W HID

Installation

Note: If the light post is larger than 2.56", we recommend to use our 3" or 4" tenon adapter reducer to make it fit our LED post top light bottom base.

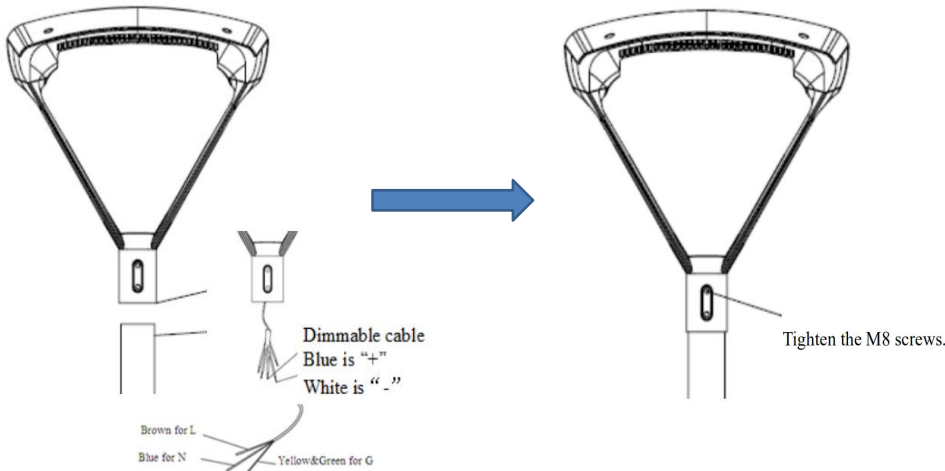

Application

Outdoor light pole shopping mall, garden, church parking lot lighting, backyard, frontyard, walkway/pathway street post lighting etc

