

LED PANEL LIGHT



Application: Office, school, conference room, hospital, and more commercial spaces

Feature:

LED Flat Panels cast the right light in any commercial setting. The slim profile fixtures are available in 1' x 4', 2' x 2' or 2' x 4' sizes and can save up to 50% of energy usage compared to traditional fluorescent fixtures. Standard 0-10V dimming capability allows greater energy-savings.

- WARRANTY — 12-year limited warranty
- Instant Startup, soft light, no glare, no noise, no strobe
- Flicker Free - Eyesight protection technology

OPTION

- Emergency Back Up

Certifications



SPECIFICATIONS:

SKU	PL-40W-123-40-TG-12-XXK	PL-40W-66-28-TG-01-XXK	PL-XXW-126-40-TG-22-XXK
Size	1x4	2x2	2x4
Wattage	40W	40W	50W/72W
CCT	3000K / 4000K / 5000K		
Luminous Flux	4400	4400	5500 / 7920
Electrical Class	Class II		
CRI	RA >80		
Lighting Angle	120 °		
Lighting Efficiency	110 LPW		
Power Factor	>0.9		
Working Temperature	4 °F ~+110 °F / -15 °C ~ +40 °C		
Input Volt/ Frequency	110-277V / 50/60 Hz		
Environment Location	IP 40		
Lifespan	>50000 H		
THD	<15%		
DLC Family Code	NANPFJ	ZBAAEN	ZBAAEQ/CCCGAF
P/C Master Pack	2	2	2
Master Pack Info	48.6"x13.6"x2.8"	24.6"x24.6"x2.8"	48.6"x24.6"x2.8"
Weight	15.8 LB	15.8 LB	30.1 LB

ACCESSORIES

Type	Image	Size
Surface Mount Kit		Available in 2x2 and 2x4
Emergency Back Up		Available in 8W and 15W

ORDERING CODE DEFINITION


Example: HYA-PL-40W-123-40-TG-12-5000K

Company Code	Product	Watt	Size	LED Type	TG	LED Combination	C.C.T.
HYA	PL: LED Panel Light	40W	123 : 1x4	28: 2835 40: 4014	TG: Dimmable	12: 1x4 Panel 01: 2x2 Panel 22: 2x4 Panel	3000K 4000K 5000K
		40W	66 : 2x2				
		50W/72W	126 : 2x4				


PRODUCT DIMENSIONS

2x4

Front View

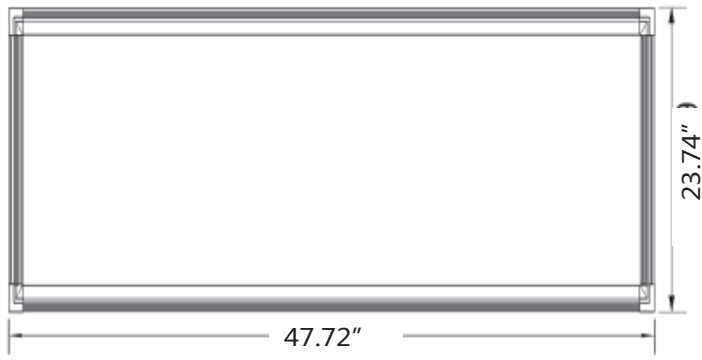


side view

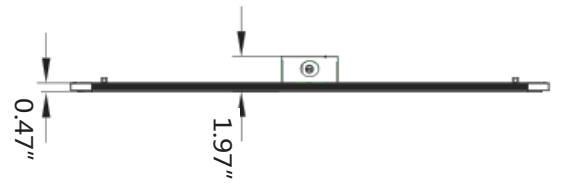


2x2

Front View

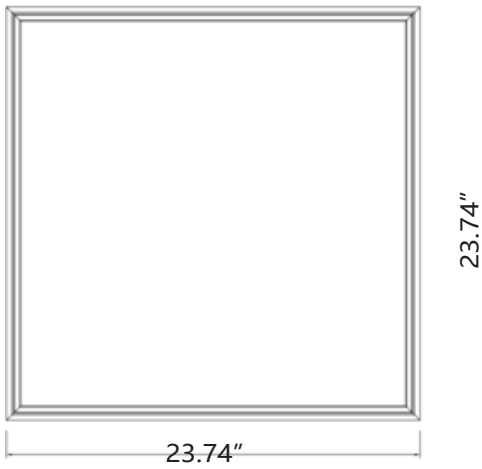

1x4

Front View

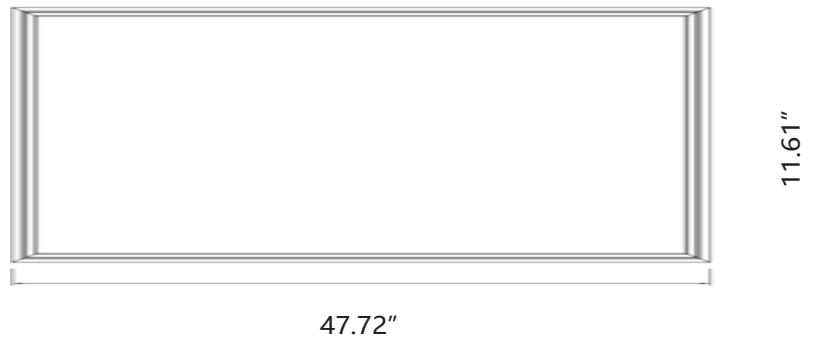

WIRING DIAGRAM

Dimming Driver

