

DIMMABLE



MODEL: P02104

4" 9W Ultrathin Slim Panel Light
750LM, IC Rated and Air tight
1cct/3cct/5cct/3cct Plus Wall Switch



Features

Body

Durable airtight aluminum body with etched white polycarbonate diffuser lens for low glare

LED Characteristics

This general application light fixture features a 9 watt LED module that maintains uniform intensity producing up to 720 lumens; with a typical CRI of 80+. Available 2700K-6000K; 3CCT/5CCT tuneable, 3cct plus wall switch

Dimming

5%-100% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers.

Mounting

Includes two spring loaded clips to attached to any ceiling material. The slim profile allows to be mounted under joists or duct work.

Beam angle

110°

Warranty

10 year warranty

LED Driver

Extruded junction box with 220mA dimmable class II electronic LED driver with 100-130V 60Hz input. Includes an 18AWAG cable from driver to fixture.

Quick Connect push-in terminals

Three "Quick connect" push-in terminals for fast and easy wiring.

Operating Temperature

-40°C~40°C(-4°F~105°F)

Environment



Suitable for damp locations. Suitable for insulated ceiling applications.

Lifespan

50000 hours at 70% light output.

Certificate

ETL
Energy Star



Description




This ultra thin recess light is a 9 watt 4" slim profile light fixture for recess retrofit application. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and stream lined design, suitable for damp locations.

Product Structure







Type	Model	LED	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Rated Life(hrs)	Dimmable
3 inch	P02103-5W	SMD2835	5	120V/100-347V	80	110°	Ra80/Ra90	2700-6500	50000	Yes
4 inch	P02104-9W	SMD2835	9	120V/100-347V	80	110°	Ra80/Ra90	2700-6500	50000	Yes
5 inch	P02105-10W	SMD2835	10	120V/100-347V	80	110°	Ra80/Ra90	2700-6500	50000	Yes
6 inch	P02106-12W	SMD2835	12	120V/100-347V	80	110°	Ra80/Ra90	2700-6500	50000	Yes
7 inch	P02107-15W	SMD2835	15	120V/100-347V	80	110°	Ra80/Ra90	2700-6500	50000	Yes
8 inch	P02108-18W	SMD2835	18	120V/100-347V	80	110°	Ra80/Ra90	2700-6500	50000	Yes
11 inch	P02111-24W	SMD2835	24	120V/100-347V	80	110°	Ra80/Ra90	2700-6500	50000	Yes


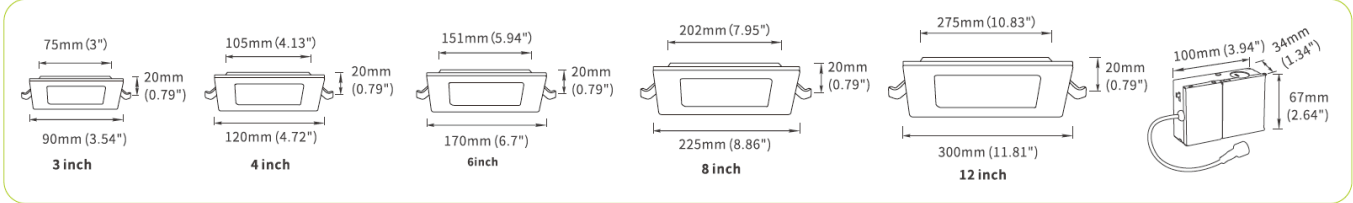
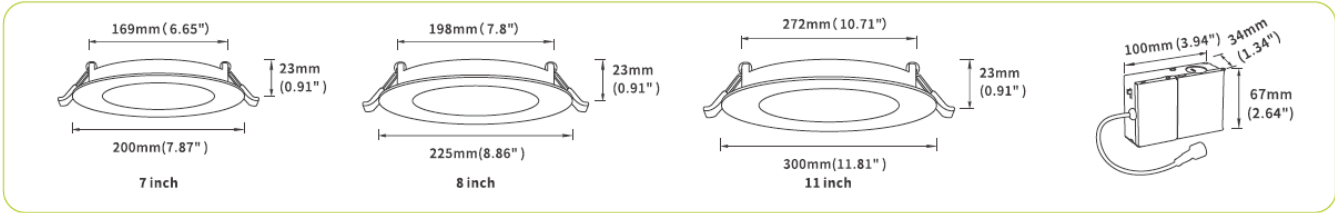
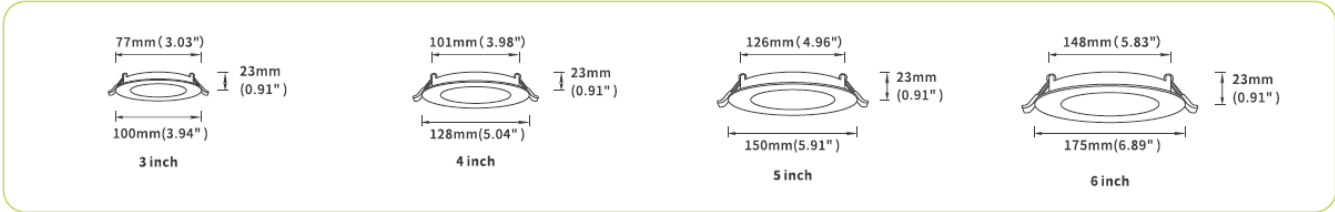


LED Driver

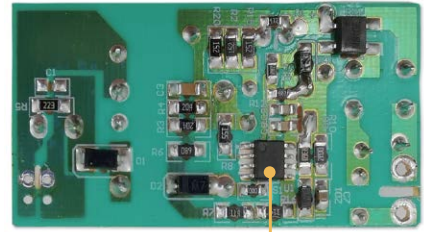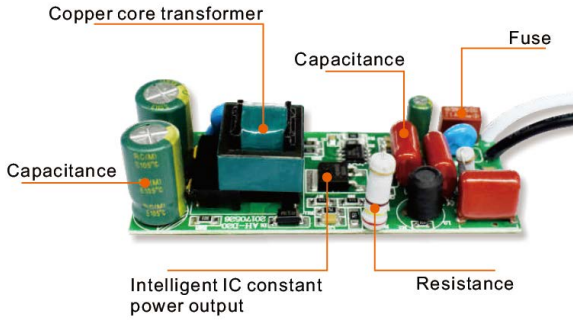


Intelligent IC constant power output

Photometry

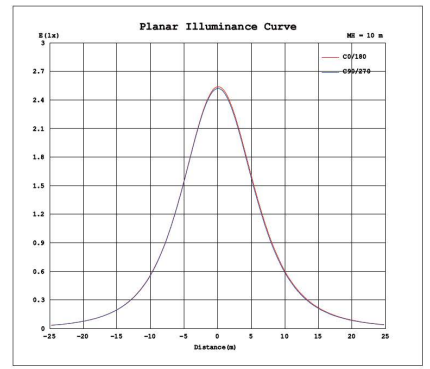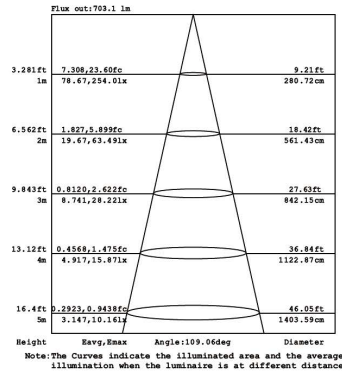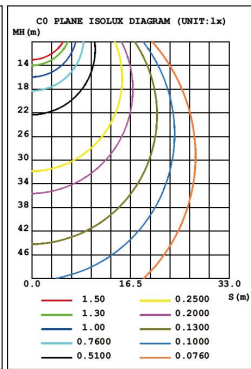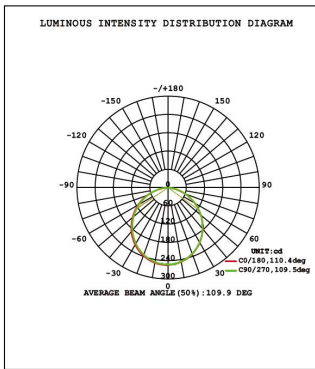

Installation

Fig.1



or




Fig.2




Fig.3

