


DESCRIPTION

Excellent optical design greatly improves light utilization and evenness. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.



TUNABLE 3-1 CCT SELECTOR

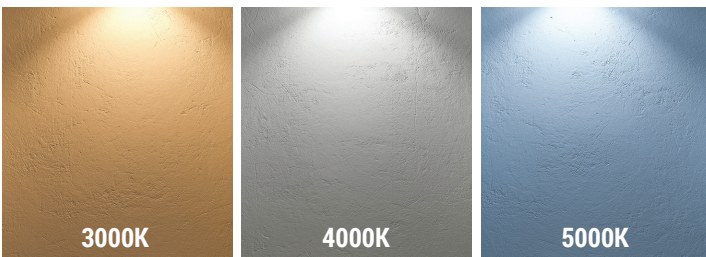

Easily flip the switch for desired CCT. It's that simple!

CONSTRUCTION

PC driver housing and aluminum reflector with architectural white finish. Standard industry torsion springs adjust to fit 5" and 6" compatible housings. E26/GU24 base.

ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

CERTIFICATION

ETL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

WATTAGE	12W
LUMENS	1040 lumens
EFFICACY	87 lm/W
VOLTAGE	AC120V
POWER FREQUENCY	50/60 Hz
CCT	3000K 4000K 5000K
CRI	Ra>90
IP RATING	IP40, Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited
PORTOR CAT#	PT-DL-6I/12-3CCT




MODEL NUMBER(S)

MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
6CT1230/40/50LRWH	8W	1040 <i>(1040 lumens at 4000K)</i>	87	3000K/4000K/5000K	>90	120V



DIMENSION

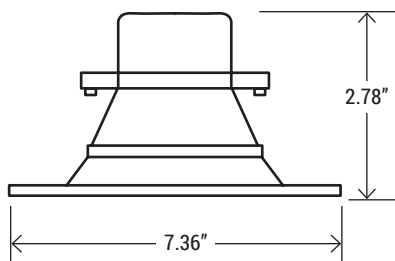

- Fits most 5" & 6" recessed housings

ACCESSORY



E26 Adapter included for easy retrofitting

PHOTOMETRY

Fixture photometry has been conducted accredited testing laboratory in accordance with IESNA LM79-08.

