

## Description


Rotatable LED wall pack has the same beautiful look as traditional wall packs. With over 120-130lm/W light efficiency, best aluminum heat dissipation sink, equipped with long lasting driver which last 50,000hrs, ideal for replacing old wall packs 70-400W MH HPS wall pack for outdoor wall mounted lighting application, rotatable modules makes it easy to use it as semi cutoff and semi cutoff wall pack lighting

## Rotate-Able LED Wall Pack



## Features

- \* Bronze aluminum housing & polycarbonate cover
- \* UL driver
- \* IP65 waterproof
- \* Easy installation and operation
- \* CRI >75Ra
- \* CCT 5000K(standard)  
3000K/4000K//5700K(special)
- \* Working temperature: -30°C~ 60°C
- \* Eco friendly without mercury
- \* Instant start, no flickering, no humming
- \* Energy saving, long lifespan 100,000hr LM79 Rated
- \* No UV or IR
- \* 12 years warranty
- \* 270 degree rotate-able angle

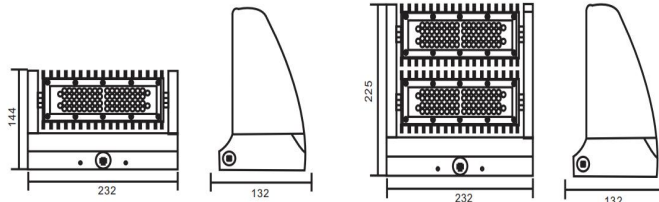

25W-60W

80W-120W

## Specification


| Product number | Watts | Voltage        | Lumen    | Dimension        | LED chips   | Beam Angle | IP rating | Certs      | Equivalent   |
|----------------|-------|----------------|----------|------------------|-------------|------------|-----------|------------|--------------|
| OR-LFCWP-25W   | 25W   | 100-277V<br>AC | 3,250LM  | 9.13"x5.2"x5.67" | Philips SMD | 120°       | IP65      | CUL UL DLC | 50-75W HID   |
| OR-LFCWP-40W   | 40W   |                | 5,200LM  | 9.13"x5.2"x5.67" |             |            |           | CUL UL DLC | 80-120W HID  |
| OR-LFCWP-55W   | 55W   |                | 7,150LM  | 9.13"x5.2"x5.67" |             |            |           | CUL UL DLC | 120-175W HID |
| OR-LFCWP-60W   | 60W   |                | 7,800LM  | 9.13"x5.2"x5.67" |             |            |           | CUL UL DLC | 175-250W HID |
| OR-LFCWP-80W   | 80W   |                | 10,400LM | 9.13"x5.2"x8.86" |             |            |           | CUL UL DLC | 250-400W HID |
| OR-LFCWP-120W  | 120W  |                | 15,600LM | 9.13"x5.2"x8.86" |             |            |           | CUL UL DLC | 400-600W HID |

## Installation

1. Wiring from the bottom of the luminaire  
\*contact us for installation guide sheet

2. Wiring from the side of the luminaire  
\*contact us for installation guide sheet

## Photometrics

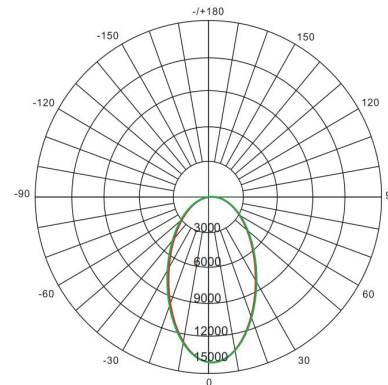

## Application

Outdoor building, Wall area, General area and Security lighting etc

