

LED CANOPY LUMINAIRE

Product Description

Canopy Light luminaire Has a Beautiful Low Profile Design Intended For Gas Station Canopy or Other Commercial Lighting Applications, Support Ceiling Mount or Conduit Pipe Mount. High-Performance Illumination That Lasts 50,000HRS. It's Ideal For Replacing 250-400W Metal Halide.



Application:

Widely used in Gas Station, service Stations etc.



Electric Characteristic


Specification/Model	LS-NCPV4-150WSAS-ab
Housing	Die-casting Aluminum Alloy
Input power	150W
Lumens output	19500LM
Efficiency	130LM/W
Mounting	Pendant / Surface Mount
Color Temperature	4000K/4500K/5000K/5700K
Input voltage	100-277V UL Driver
Dimension	15 *15 in
Waterproof Rating	IP 65
Working temperature	-40~+45°C
Junction temperature	<75°C
lamps efficiency	≥90%
Certificates	DLC UL
Equivalent	250-400W MH/HPS

Ordering Information


Example: LS-NCPV4-150WSAS-40K-T

Product	Power	Replacement	Color Temperature	Furnish
LS-NCPV4-150WSAS-ab	150W	250-300W MH/HPS	40K 4000K 45K 4500K 50K 5000K 57K 5700K	T-White

Installation Options

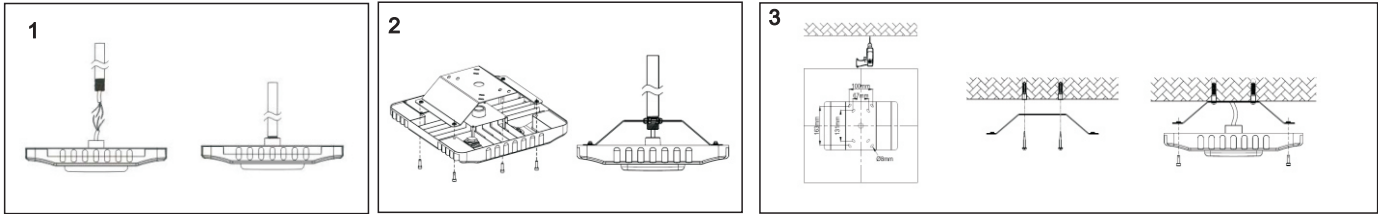

Photometrics

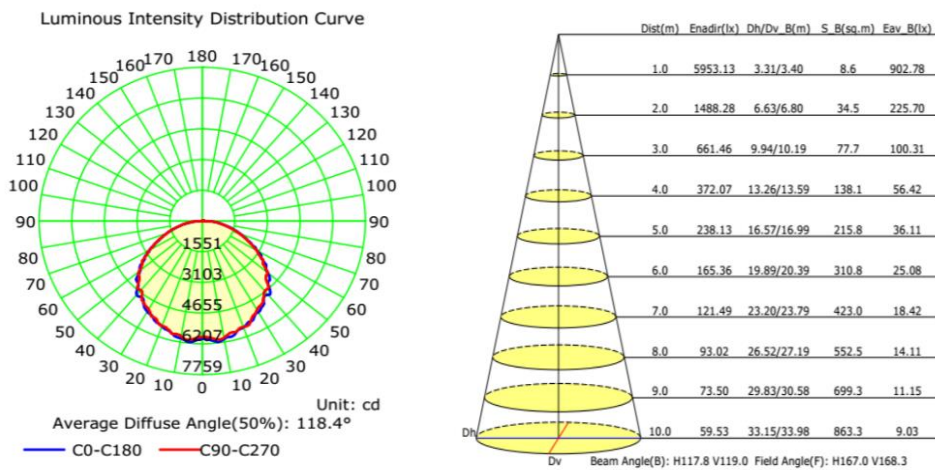


Projected LED Lumen Maintenance

Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8

Data references the extrapolated performance projections for the Canopy LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Dimensions

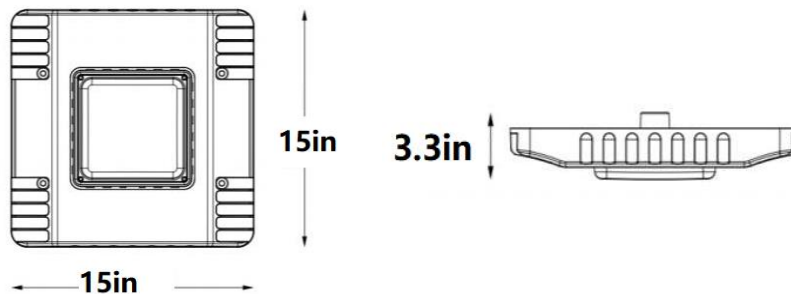

After Sale Service

The product refers to electricians' knowledge. Please don't disassemble it by yourself. If any quality problem happens, please contact the factory for warranty details.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are without notice.