

5 Watts&5 CCT Tunable LED Panel Light



FEATURES

- Both 5 Watts 5CCT adjustable.
- Easy install by Recessed or surface mounts.
- Built-in junction box Fits standard T-grid ceilings
- Optical lenses over LED chip, pc cover never yellow over time.
- 50,000hours Life time. DLC PREMIUM

SUITABLE APPLICATIONS

- Office Lighting
- Meeting room lighting
- Store lighting
- Restaurant lighting



CONSTRUCTION:

Quality white Aluminum heatsink and high transmission PC cover.

OPTICAL SYSTEM:

High brightness SMD LED chips as backlit lighting solution.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

PERFORMANCE

Model NO	SIZE	Wattage	Voltage	Light Efficiency	Kelvin Options
LS-PL22-M40W-CCT	2X2	15/20/25/30/40W	100-277V	125LM/W	3500K/4000K/5000K
LS-PL14-M40W-CCT	1X4	15/20/25/30/40W	100-277V	125LM/W	3500K/4000K/5000K
LS-PL24-M72W-CCT	2X4	30/40/50/60/72W	100-277V	125LM/W	3500K/4000K/5000K

ELECTRICAL:

Available as 100-277V input. -25°C to45°C.

INSTALLATION&MOUNTING:

Suspended Ceiling Mounting/ Frame Mounting

5 Watts&5 CCT Tunable LED Panel Light

Electric Characteristic

Specification/Model	LS-PL22-M40W-CCT	LS-PL14-M40W-CCT	LS-PL24-M72W-CCT
LED Driver	UL listed XIEZHEN Brand 0-10 dimmable		
Input power tunable	15/20/25/30/40W	15/20/25/30/40W	30/40/50/60/72W
Lumens output	1875/2500/3125/3750/5000LM	1875/2500/3125/3750/5000LM	3750/5000/6250/7500/9000LM
Efficiency	125LM/W	125LM/W	125LM/W
CRI	>80	>80	>80
Color Temperature	35/40/50/57/65K tunable	35/40/50/57/65K tunable	35/40/50/57/65K tunable
Input voltage	120-277V/AC	120-277V/AC	120-277V/AC
Light distribution type	110D	110D	110D
Working temperature	-25+45°C	-25+45°C	-25+45°C
Junction temperature	<75°C	<75°C	<75°C
lamps efficiency	≥90%	≥90%	≥90%
Certificate	ETL DLC	ETL DLC	ETL DLC
Equivalent	36-110W MH/HPS	36-110W MH/HPS	56-150W MH/HPS

Electric Characteristic

OPTIONAL ACCESSORIES



Emergency Battery Backup, Style LSED20W

LED BACK-LIT PANEL LIGHT

Model: LS-PL24-M72W-CCT

POWER: (Default with)

30W 40W 50W 60W 72W

CCT: (Default with)

3500K 4000K 5000K 5700K 6500K

VOLTAGE: AC120-277V 50/60Hz

Model: LS-PL22-M40W-CCT-VL


POWER: (Default with)

15W 20W 25W 30W 40W

CCT: (Default with)


3500K 4000K 5000K 5700K 6500K

VOLTAGE: AC120-277V 50/60Hz

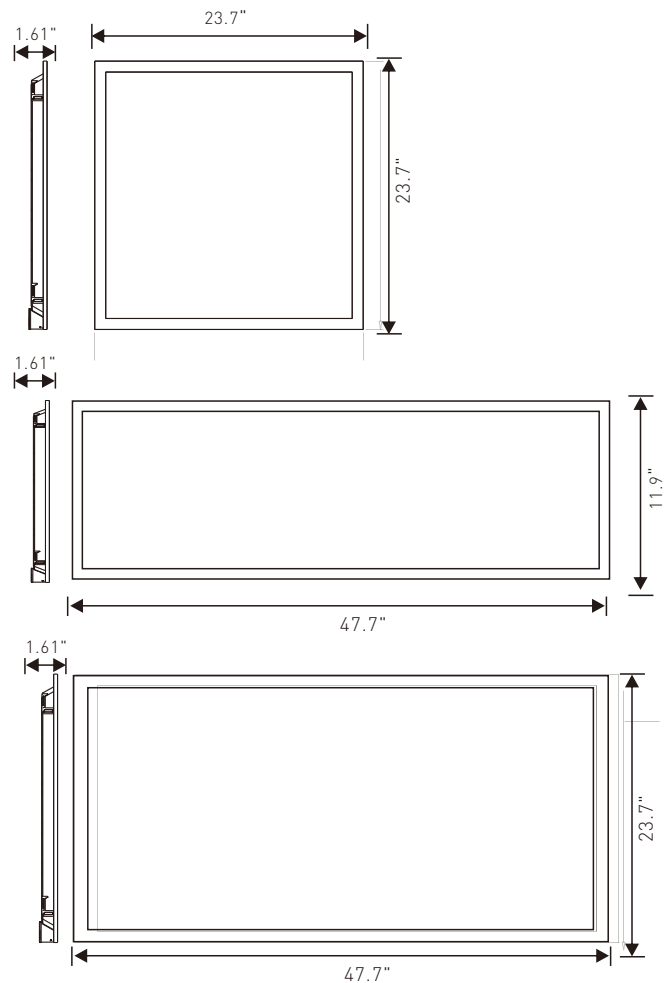

5 Watts&5 CCT Tunable LED Panel Light


DISTRIBUTION DIAGRAM



AVERAGE BEAM ANGLE(50%): 110°

Test Number:XL-PLU22M38XX-AZZ-A
Lumens:2250LM
Test Number:18W
Test Number:5000K


UNIT:CD
- C0/180,110.9
- C30/210,110.5
- C60/240,109.3
- C90/270,109.1



AVERAGE BEAM ANGLE(50%): 110°

Test Number:XL-PLU22M38XX-AZZ-A
Lumens:3500LM
Test Number:28W
Test Number:5000K

UNIT:CD
- C0/180,110.9
- C30/210,110.5
- C60/240,109.3
- C90/270,109.1




AVERAGE BEAM ANGLE(50%): 110°


Test Number:XL-PLU24M48XX-AZZ-A
Lumens:6000LM
Test Number:48W
Test Number:5000K

UNIT:CD
- C0/180,110.9
- C30/210,110.5
- C60/240,109.3
- C90/270,109.1


Install instruction




STEP 1: Remove boards as drawing




STEP 2: Put the lamp on the ceiling




STEP 3: Open the cover of junction box with tool knock off the piece of top Install serpentine coil in junction box




STEP 4: Connect wires with P2 P3 nuts
Refer the wiring diagram



T-bar clips should be bent out to provide additional safety and support.



STEP 5: Lock the lamp on frameworks



STEP 6: Put the board back; and check again