









## Configuration

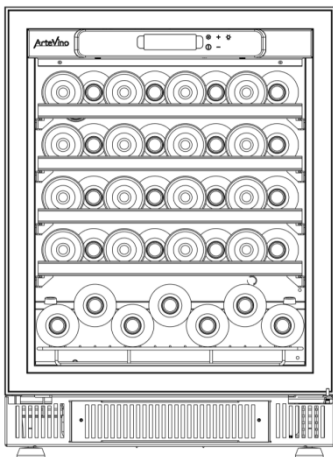

Bottles capacity with 4 sliding shelves : **39 Bottles\***

\* Traditional Bordeaux bottles

Range :	COSY
Function :	Serving (multi-temperatures)
Reference :	COSYPMT
Equipment :	4 sliding shelves
Capacity* :	39 Bottles*

-  Constant and reliable temperature thanks to the wine cabinet insulation, the controller and the aluminium walls.
-  Humidity rate between 65% and 80% ensuring by our product design, the cooling and venting system,
-  The natural venting system of our wine cabinets ensures constant air renewal within the wine cabinet.
-  Ideal protection against UV rays thanks to our glass door with double pan reinforced with gaz argon to filter up to 97% of the UV rays.
-  No vibration thanks to the slow-cycles compressor fixed on silent blocs + evaporator flooded in the high density polyurethane foam.

## General Features

Dimensions H x W x D (mm)	816/832 x 594 x 549	Weight cabinet empty (kg)	45
Dimensions in pack (mm)	1000 x 620 x 620	Weight equipped cabinet (kg)	52
Colors	Black	Weight in pack (kg)	60
Door	Glass door with black frame	Useful volume (L)	116

## Equipment & Accessories

### Equipment

- Glass door black frame, stainless steel handle
- Reversible door
- Interior lighting with 2 white Leds integrated under the control panel ; two lighting options: On/ Off
- 4 adjustable feet and 4 hexagonal pillars to elevate the wine cabinet
- 2 hinges: one for the stand alone installation and one for the built-in installation
- Labels for the bottles identification

### Accessories

**Universal shelves: ACHUI**

**Weight : 1,8 kg**

**Bottles capacity per level : 8\***

**Material : Solid beech wood.**

Modular system : you can choose the shelf configuration :



Sliding shelf



Presentation shelf



Storage shelf

The label holder allows you to identify your bottle quickly and easily



Suitable to store all types of bottles



## Technical features

### Control panel

- Electronic regulation from 6°C to 20°C; from 6°C to 10°C for the lowest part of the wine cabinet and from 15°C to 20°C for the top of the wine cabinet
- Inner electronic display, LED screen with white display with touch buttons
- Visual alarm : sensor fault, temperature fault and humidity default

### Performances

Cold production :	static cooling
Hot production :	Heating element
Winter function:	Automatic
Gaz uses :	R600a
Recommended temperature range :	From 12°C to 30 °C
Climate class :	SN
Inner material:	Aluminium
Insulation type:	PU foam
Acoustic emissions (db(A)):	41
Consumption Aec(kWh/ An)**:	132
Energy efficiency rating :	A
Consumption Aec(kWh/ An)***:	172

\* Traditional Bordeaux bottles

\*\* Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F) Alimentation 230V 50Hz.

\*\*\* Comply with DEPARTMENT OF ENERGY – 10 CFR Part 430 – Energy Conservation Program: Energy Conservation Standards for Miscellaneous Refrigeration Products Alimentation 115V 60Hz