


IPC-HP21105

ISA half size CPU card AMD G-series
VGA / Audio / LAN / 2COM / PC104 / FDD



Features

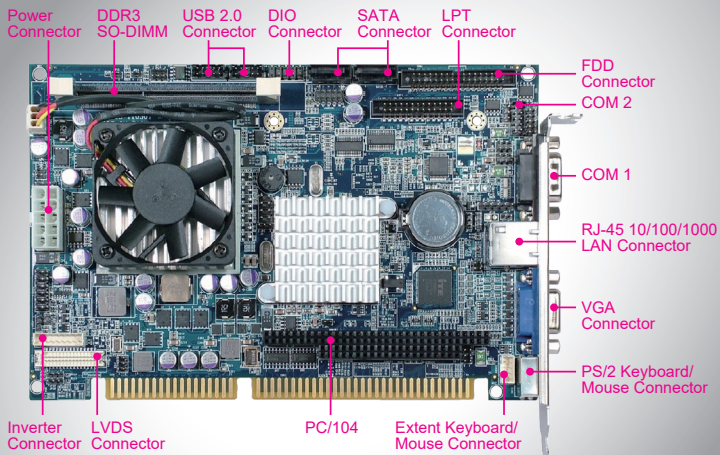

- AMD G-T16R/G-T52R onboard CPU
- 1 x LPT, 2 x COM, 2 x USB, 1 x LAN
- 2 x SATA, 1 x FDD, 1 x CFast
- 1 x VGA, 1 x LVDS
- Supports ATX/AT power (12V, 5V)

Specifications

System

CPU Support	AMD G-series onboard processor: G-T16R (1C 615MHz 4.5W) G-T52R (1C 1.5GHz 18W)
Chipset	AMD A55E
DRAM	1 x SODIMM sockets, supporting 800MHz DDR3 memory up to 4GB (non ECC)
BIOS	AMI BIOS
API/SW/FW	Watchdog
Power Supply	Supports ATX/AT power
Power Consumption	ATX: +5V:1.57A, +12V:0.71A · AT: +5V:1.47A, +12V:0.78A (CPU: AMD T52R 1.5GHz)
Dimensions	185 × 122 mm (7.28" × 4.8")
Certifications	FCC / CE

I/O Ports

SATA Interface	2 x SATAII connectors
Expansion Bus	1 x CFast, 1 x PC104
FDD Interface	1 x FDD connector with 34-pin box-header on board
Serial Ports	2 x COM COM1 for RS-232, COM2 for RS-232/422/485
Parallel Port	1 parallel port, Bi-directional, SPP / EPP / ECP
IrDA	1 x IrDA
Keyboard	PS/2 with mini DIN connector
Mouse	PS/2 with mini DIN connector
LAN	Single port: Realtek Giga LAN RTL8111F
Audio	HD audio, Realtek ALC888S
Digital I/O	4 in / 4 out
USB	2 x USB 2.0

Graphics

VGA	Supports VGA
LVDS	Supports LVDS (18bit, 24bit)

Environment

Operating Temp.	0~60°C (32~140°F)@ humidity 20~90%
Storage Temp.	-40~85°C (-40~185°F)@ humidity 20~95%

* All information contained in this document is subject to change without prior notice. Please log on www.antcomputer.com to acquire latest information. For detail mechanics drawing, please contact our sales.



Computer Inc.

Your IPC Solutions Partner