

# PLP

## PLP-P915F / PLP-P917F / PLP-P919F

### Fanless and Low Power Atom N270 Panel PC

#### Features and Benefits:

- Intel® ATOM N270 CPU on board
- Supports Intel® 945GSE + ICH7M Chipset
- Totally fanless and quiet design
- Low power consumption and economical solution
- On-board IDE interface, Type II Compact Flash slot
- Optional slim SATA CD-ROM drive
- 24V DC power support, optional power adaptor for AC power
- Stainless steel front bezel
- Optional PCI slot (2 slots)




ISO CERTIFIED  
9001 | 14001

# PLP-P915F / PLP-P917F / PLP-P919F


Fanless and Low Power Atom N270 Panel PC

## Front View

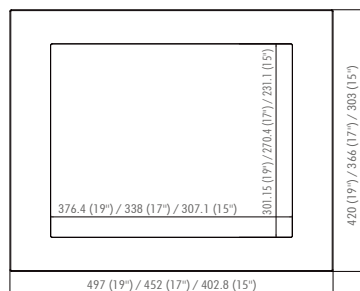


## Rear View

PLP-P915F




PLP-P917F / P919F

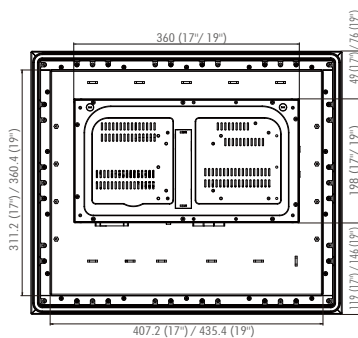

## Side View

PLP-P915F PLP-P917F PLP-P919F

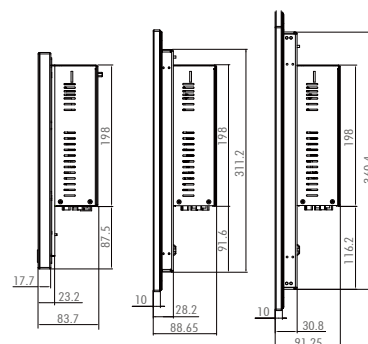

Unit: mm

## Specification

### Systems

<b>CPU Support</b>	Intel® Atom N270 CPU on board
<b>Chipset</b>	Intel® 945GSE + ICH7M
<b>Memory Support</b>	1 x 200-Pin DDRII SO-DIMM, up to 2GB
<b>Front Bezel</b>	Stainless Steel
<b>Open Frame</b>	YES
<b>Waterproof Level</b>	IP65 (front panel)
<b>Sound</b>	HD Codec
<b>Power Supply</b>	DC 24Vin 100W power supply (optional power adaptor)
<b>O.S. Support</b>	Windows 7 / XP / XPE
<b>Wall Mount Type</b>	VESA standard
<b>Dimension (W x H x D)</b>	15": 403mm x 303mm x 83.7 mm 17": 452mm x 366mm x 89 mm 19": 497mm x 420mm x 91.25 mm
<b>System Weight</b>	15": 6.6Kg / 17": 8.8Kg / 19": 10.8Kg
<b>Certificate</b>	CE, FCC

### I/O Ports

<b>USB</b>	4 x USB2.0
<b>KB / Mouse</b>	2 x PS/2 Port
<b>Audio</b>	1 x Line in, 1 x Line out, 1 x MIC in
<b>Serial Port</b>	4 x COM port (all COM ports support +5V or +12V), COM 2 for RS232/422/485 selectable
<b>Parallel Port</b>	1 x Parallel Port
<b>Digital I/O</b>	8 in / 8 out
<b>LAN</b>	2 x LAN (10/100/1000 Mbps)
<b>VGA</b>	1 x VGA
<b>Drive Bays</b>	1 x 2.5" SATA HDD, 1 x IDE CF slot on board, 1 x slim SATA CD-ROM (optional)
<b>Expansion Slots</b>	2 x PCI slot (optional), 1 x mini PCI

### Display

<b>LCD</b>	15" (XGA) / 17" (SXGA) / 19" (SXGA)
<b>Touch Screen</b>	ELO 5W Analog resistive (USB interface)
<b>Max. Resolution</b>	1024 x 768 (15") / 1280 x 1024 (17", 19")
<b>Pixel Pitch</b>	0.297 x 0.297 (15") / 0.264 x 0.264 (17") / 0.294 x 0.294 (19")
<b>Brightness</b>	350 cd/m <sup>2</sup> (15") / 380 cd/m <sup>2</sup> (17") / 300 cd/m <sup>2</sup> (19")

### Environment

<b>Operating Temp.</b>	0° ~ 40°C (32°~104°F)
<b>Storage Temp.</b>	-20° ~ 60°C (-4°~140°F)
<b>Humidity</b>	20% ~ 90%

All of trademarks and brand names are the property of their owners.

All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in May 2010.