


TV dismantling Process

Step-1: Open all the screws using a Phillips screwdriver and take off the back cover.




Step-2: Open the AV bracket's screw and take off the AV bracket. Then, take off the AC power cord from the connector, antenna connector, and all the other connectors.


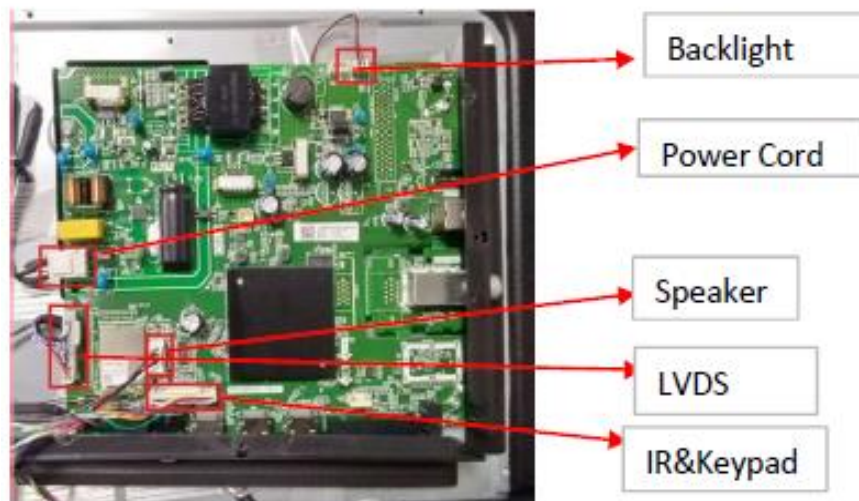


TV dismantling Process

Step-3: Open all the screws using a Phillips screwdriver from the main board. Now take out the main board for further inspection.

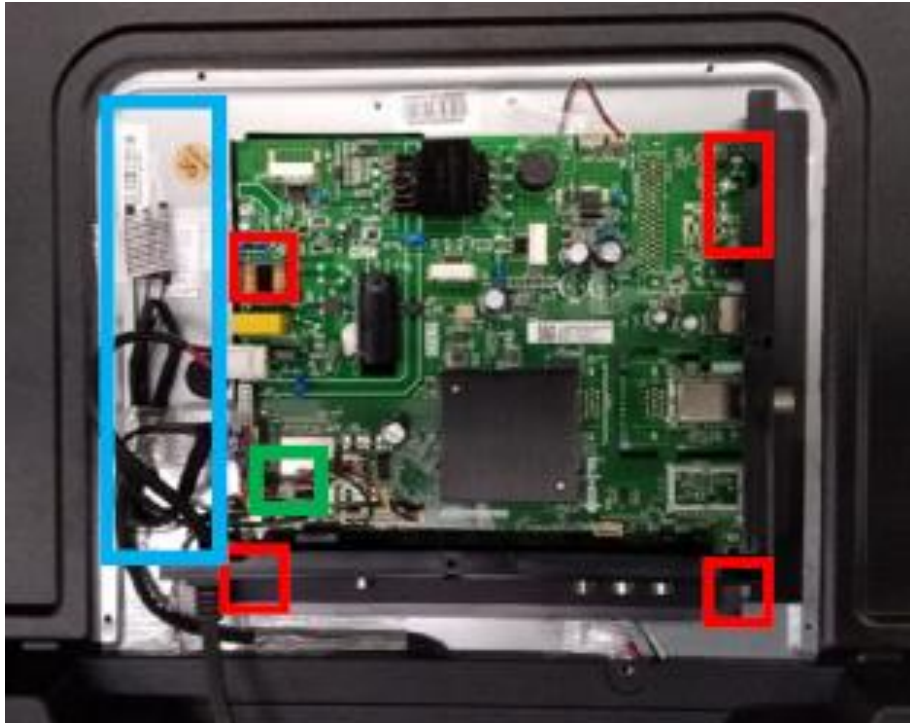

Step-4: To take out the IR and keyboard please take off the connector.

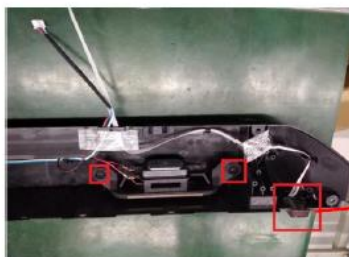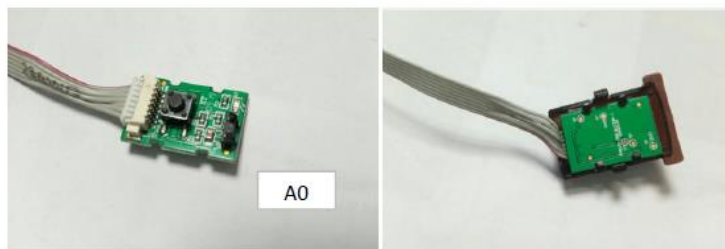

A1

TV dismantling Process

Step-5: To take out the speakers check the marked point and take off the screws.

