

Pro LED Classic GU10


Traditional halogen look with the energy saving benefits of LED

- True fit GU10 size
- High performance 87lm/W
- Suitable for fire rated and IP rated fixtures
- Available in both 36° & 60° beam angles
- High grade driver designed for smooth dimming at min & max load levels, operating effectively with rotary and digital dimming system
- 60° version manufactured with special film applied to glass lens which ensures an even spread of light along with reduced glare

LED Dim to Warm GU10

- Emits a warmer light when they are dimmed.
- Creates warmer ambience when dimmed
- Replicates dimming of halogen lamps
- Colour temperature range 2300K-2700K

Shatterproof frost glass casing for safety and improved aesthetics

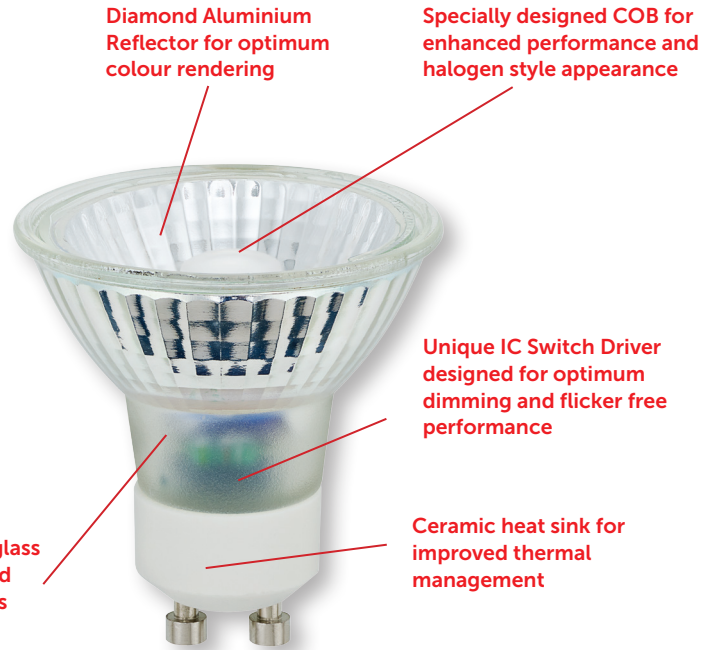

6W \leq 50W Energy Saving 88%



Technical Helpline +44 (0)1924 893380

Code	Volts	W	Cap	Finish	lm	cd	Description	Hrs
Glass GU10								
05498	240	6	GU10	Warm White 2700K	520	1150	Non Dimmable 36°	30000
05499	240	6	GU10	Cool White 4000K	520	1150	Non Dimmable 36°	30000
05500	240	6	GU10	Daylight 6000K	520	1150	Non Dimmable 36°	30000
05507	240	6	GU10	Warm White 2700K	520	400	Non Dimmable 60°	30000
05508	240	6	GU10	Cool White 4000K	520	400	Non Dimmable 60°	30000
05509	240	6	GU10	Daylight 6000K	520	400	Non Dimmable 60°	30000
05501	240	6	GU10	Warm White 2700K	520	1150	Dimmable 36°	30000
05502	240	6	GU10	Cool White 4000K	520	1150	Dimmable 36°	30000
05503	240	6	GU10	Daylight 6000K	520	1150	Dimmable 36°	30000
05510	240	6	GU10	Warm White 2700K	520	400	Dimmable 60°	30000
05511	240	6	GU10	Cool White 4000K	520	400	Dimmable 60°	30000
05512	240	6	GU10	Daylight 6000K	520	400	Dimmable 60°	30000
Dim to Warm GU10								
05513	240	6	GU10	Warm White 2700K-2300K	520	750	Dimmable 36°	30000

¹ CRI - Colour Rendering Index
² LMR - Lumens Maintenance Ratio
³ Subject to terms & conditions

