

COACH LANTERN

IP44

AVAILABLE IN
CFL

AVAILABLE IN
LED



A traditional and elegant lantern design.

The Coach lantern is manufactured in vandal resistant polycarbonate with all the anti weathering benefits over die cast aluminium.

The wall mounted units benefit from the versatile QUICK FIT system, the unique fast fit electrical connection eases installation and helps prevent the end user installing the product incorrectly. The lantern range is available with a variety of lamp options.

- Easy to install.
- IP44.
- HI-LO option available.
- Choice of standard, photocell and PIR options.
- PIR: Day time walk test.
- Shatter-proof Polycarbonate detector.
- PIR Range of 6 Metres.
- 110° Angle of detection.
- Photocell: Dusk to dawn sensor.
- Switches on at dusk and off at dawn.
- Designed to BS EN 60598.
- Optional corner bracket.




Coach
Patio Lantern



Coach
Mini Column

Colour finish options

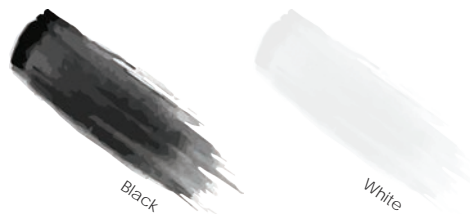

Lamp Types

- LED 3.
- LED 5.
- LED 600.
- 9W TC-S.
- 13W TC-D.
- 18W TC-D.
- B22 GLS (Less lamp).
- PLEASE NOTE - High Frequency versions are all 4-Pin.

Materials

- Body: Vandal resistant polycarbonate self-extinguishing fire properties in black / white.
- Diffuser: Vandal resistant polycarbonate.

Installation

- Quick Fit connection.
- Optional Corner Bracket.
- Photocell outdoor use only.
- HI-LO PIR - 100% light output, dims to 10% during periods of inactivity.

Standards

- IP44.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

COACH LANTERN

CL / CP / MC

AVAILABLE IN
CFL

AVAILABLE IN
LED

Available Options

Product	Switch Start	High Frequency	3 Hour Maintained	Photocell	PIR	Dimmable	Night Light	Self Test	HI-LO PIR
B22 GLS				■	■				
9W	■			■	■				
13W		■		■	■				
18W		■		■	■				
PATIO B22 GLS									
MINI COLUMN B22 GLS									
LED 3				■	■				
LED 5				■	■				
LED 600				■	■				■



Codes

Coach Lantern	B22 GLS	B22 GLS PIR	B22 GLS PC	9W	9W PC	13W HF
Black	CL/BK100	CL/BK100P	CL/BK100C	CL/BK009	CL/BK009C	CL/BK113E
White	CL/WK100	CL/WK100P	CL/WK100C	CL/WK009	CL/WK009C	CL/WK113E

	13W HF PC	18W HF	18W HF PC	PATIO B22 GLS	MINI COLUMN B22 GLS
Black	CL/BK113EC	CL/BK118E	CL/BK118EC	CP/BK100	MC/BK100
White	CL/WK113EC	CL/WK118E	CL/WK118EC	CP/WK100	MC/WK100

Coach Lantern LED	LED 3	LED 3 PIR	LED 3 PC	LED 5	LED 5 PIR	LED 5 PC
Black	CL/BKLED3	CL/BKLED3P	CL/BKLED3C	CL/BKLED5	CL/BKLED5P	CL/BKLED5C
White	CL/WKLED3	CL/WKLED3P	CL/WKLED3C	CL/WKLED5	CL/WKLED5P	CL/WKLED5C

Coach Lantern LED 600 Series	LED 600	LED 600 PC	LED 600 PIR	LED 600 HI-LO PIR
Black	CL/BK4LED600	CL/BK4LED600C	CL/BK4LED600P	CL/BK4LED600HILO
White	CL/WK4LED600	CL/WK4LED600C	CL/WK4LED600P	CL/WK4LED600HILO

Line Drawing & Dimensions

Size	Patio	Coach	Mini Column
A	170mm	273mm	170mm
B	480mm	417mm	859.5mm

Lamp Types

- LED 3.
- LED 5.
- LED 600.
- 9W TC-S.
- 13W TC-D.
- 18W TC-D.
- B22 GLS (Less lamp).
- PLEASE NOTE - High Frequency versions are all 4-Pin.

Materials

- Body: Vandal resistant polycarbonate self-extinguishing fire properties in black / white.
- Diffuser: Vandal resistant polycarbonate.

Installation

- Quick Fit connection.
- Optional Corner Bracket.
- Photocell outdoor use only.
- HI-LO PIR - 100% light output, dims to 10% during periods of inactivity.

Standards

- IP44.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.