

PopPack LED

THORN

96628129 POPPACK +LED7000-840 HF PIR L1200

LED 60W LED_POPR_7150	IP20	IK03			650°C	T _a -20 +25
-----------------------	------	------	--	--	-------	---------------------------


PopPack LED

Batten LED luminaire with replaceable light engine.
electronic - fixed output fixed output control gear. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic. Electrical connection via 4 x 2 x 2.5mm² terminal block. Including pre-wired PIR sensor with switch ON/OFF functionality. 3 core wiring sufficient for the through wiring of the products, max. load per circuit = 2A. Complete with 4000K LED.


Dimensions: 1225 x 60 x 74 mm
Total power: 59.8 W
Luminaire luminous flux: 7150 lm
Luminaire efficacy: 120 lm/W
Weight: 1.5 kg



TLG_POPR_F_LEDDDP.jpg

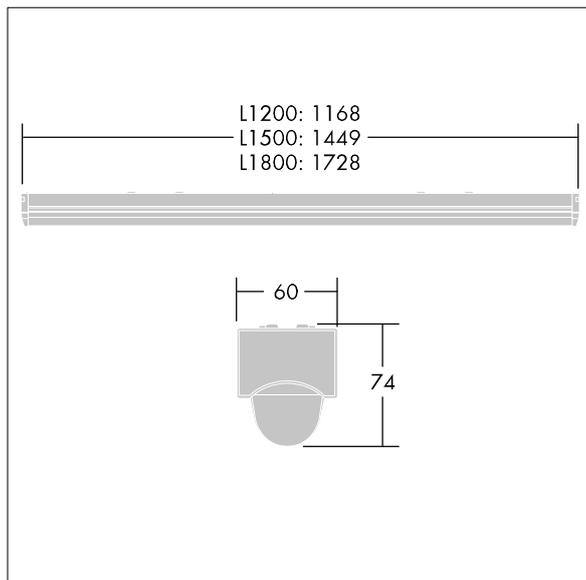

TLG_POPL_M_LD1.wmf

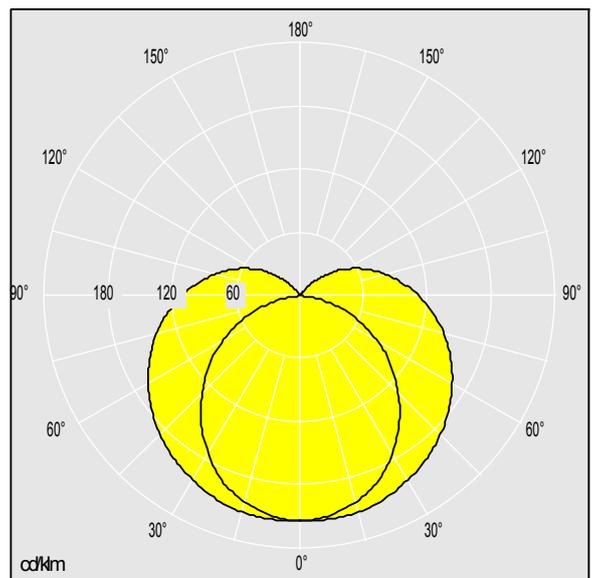

TLG_SP_0042549.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 7150 lm
Luminaire efficacy*: 120 lm/W
Lamp efficacy: 119 lm/W
Colour Rendering Index min.: 80
LOR: 1,00 ULOR: 0,17 DLOR: 0,83

Correlated colour temperature*: 4000 Kelvin
Chromaticity tolerance (initial MacAdam)*: 3
Rated median useful life*:
50000h L70 at 25°C
Ballast: 1x HF Tridonic LCI
Luminaire input power*: 59.8 W Lambda = 0.95
Dimming: TLDO

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting