




**COLLINGWOOD
LIGHTING**

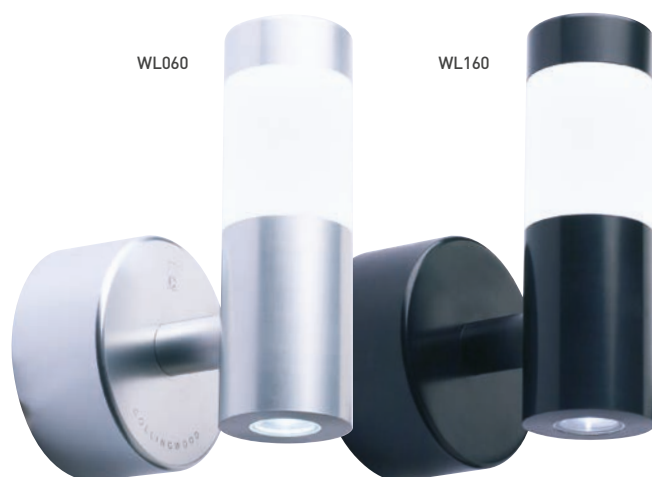

FEATURES & BENEFITS

- › Complete with wall fixings and waterproof crimp connectors
- › Halo effect for decoration
- › LED flood light for illumination

WL060 | WL160

Straight to mains LED halo / flood wall light

IP65

Suitable for use outdoors



7-year extended warranty available



2.6W

240V



40°C



2



Patent information: collingwoodlighting.com/patent

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	110°	WL060 NW	>70Ra	82	32	46
	110°	WL160 NW	>70Ra	82	32	46
3000K	110°	WL060 WW	>80Ra	58	22	26
	110°	WL160 WW	>80Ra	58	22	26

GENERAL

Construction material	Anodised aluminium
Inrush current	9A 0.8ms

WIRING


Cable / flying lead	0.3m Live, Neutral & Earth
Type of wiring required	Parallel (mains) 220-240V AC, 50-60Hz

LED DRIVERS

Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	-	No	2	-	-

ACCESSORIES

Product code	Description
There are currently no accessories associated with this product	

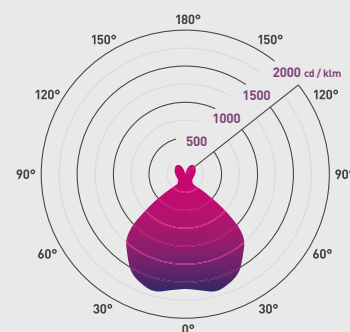

4000K 110°

Additional diagrams available at collingwoodlighting.com

