

WALL LIGHTS TECHNICAL SPECIFICATION SHEET



**COLLINGWOOD
LIGHTING**

WL341



WL342



NEW

WL341 ASYMMETRIC STRAIGHT TO MAINS CAST FINISH STEP LIGHT WL342 ASYMMETRIC STRAIGHT TO MAINS BRUSH FINISH STEP LIGHT




Features & Benefits

- Can be used as a wall light or ground light
- Straight to mains for easy installation
- Installation tube included
- 1m H05RN-F rubber cable attached for permanent use outdoors

PHOTOMETRICS @ 25°C

Colour	Product code	Beam angle	Wattage	Life of LED	CRI	lm	lm/W	lx (1m)
NW / 4000K	WL341NW*	50°	2.6W	L70, B10 70,000hrs	>70Ra	59	22	54
	WL342NW*							
WW / 3000K	WL341WW*				>80Ra	50	19	65
	WL342WW*							

* Available from July 2015

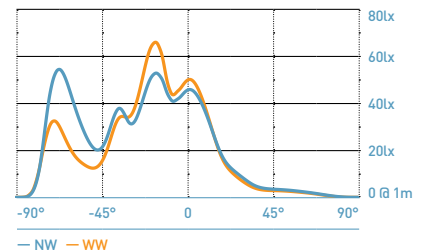

GENERAL

Bathroom zone	2
Building regulations	N/A
Construction material	Stainless Steel 316
Cut-out (mm)	80
Face temperature when lit (°C)	30
Inrush current	TBC
IP rating	67
Maximum ambient temperature (ta = °C)	35
Rotation angle (°)	N/A
SELV (separated extra low voltage) driver	Yes (Integral)
Weight (kg)	1

WIRING

Cable/flying lead (m)	1 (H0RN-F) rubberised cable (outside diameter: 7mm)
Type of wiring required	Parallel (mains) 220-240V AC, 50-60Hz

LED DRIVERS

Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (driver built in)	N/A	No	2	N/A	N/A


ACCESSORIES

Product code	Description
Installation tube included	
JB5	Gel filled junction box
WC 5-9	Quick release waterproof joint

WARRANTY

7 year extended warranty available

Dimensions



Energy efficiency rating

