

Yamaha TTR 110 Manual Clutch Kit Installation






First you need to remove the kick starter, foot pegs (4 bolts under the engine), and the right motor case. Don't forget to drain the motor oil first (bolt on left side of engine).








Now remove the clutch house by unscrew 4 bolts and replace the item with circle mark with the ones provided in the package. (item no.2)

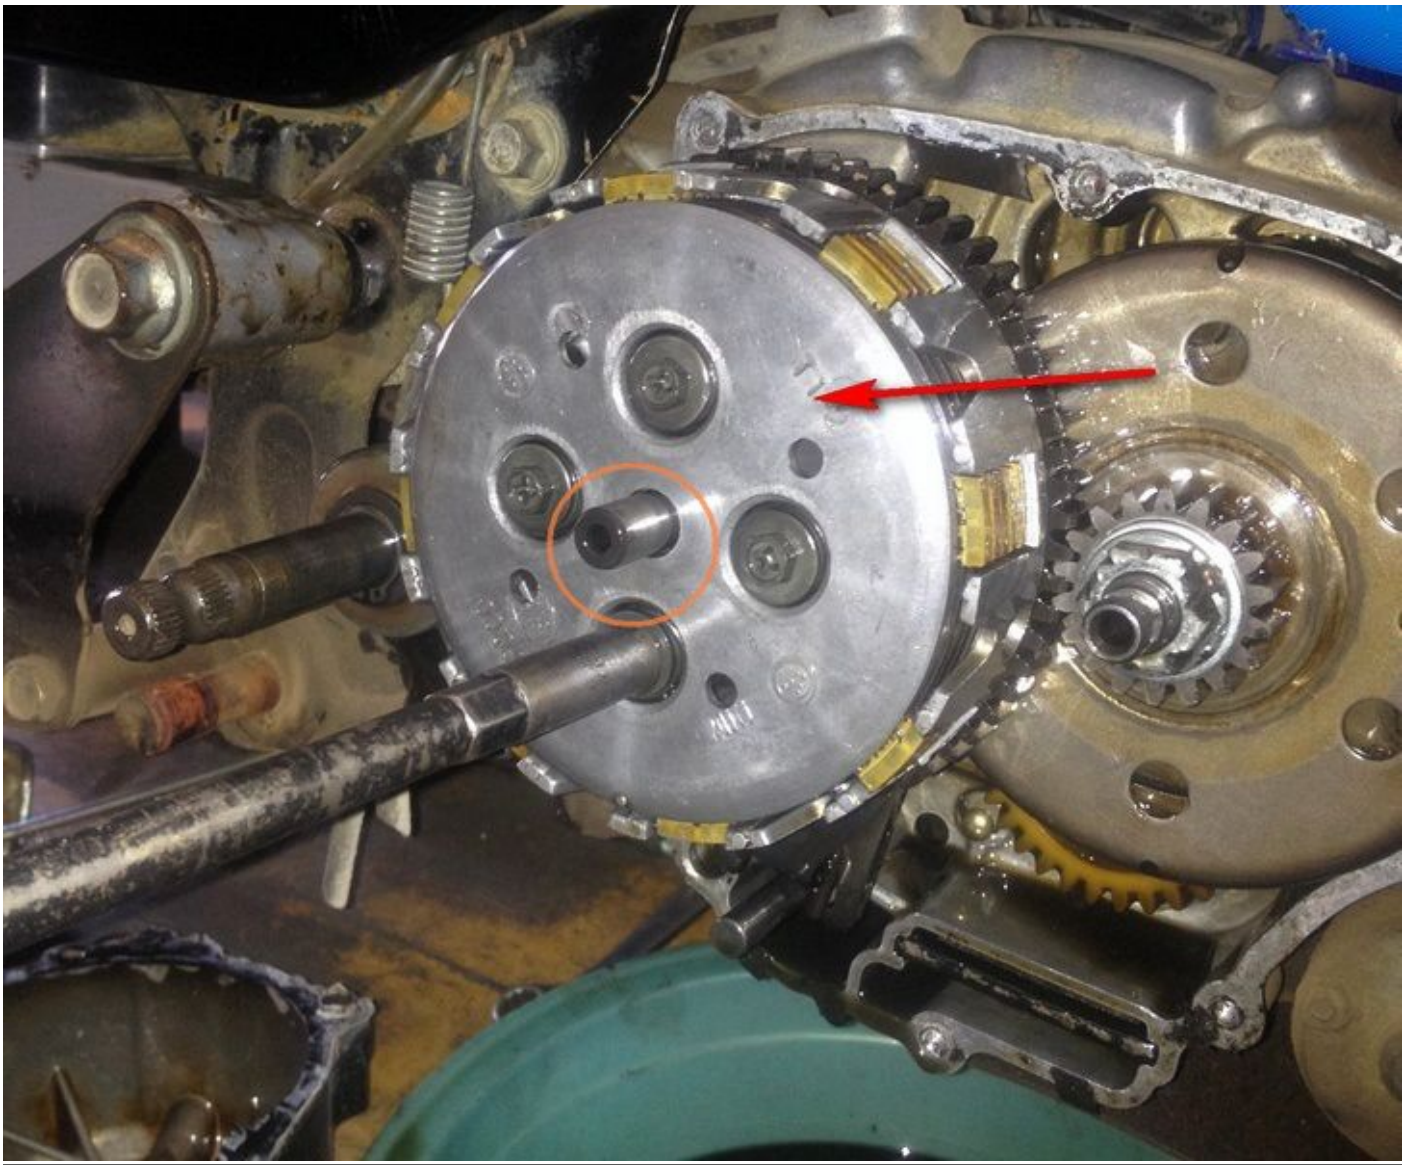



Put the clutch house back to the original position and screw 4 bolts

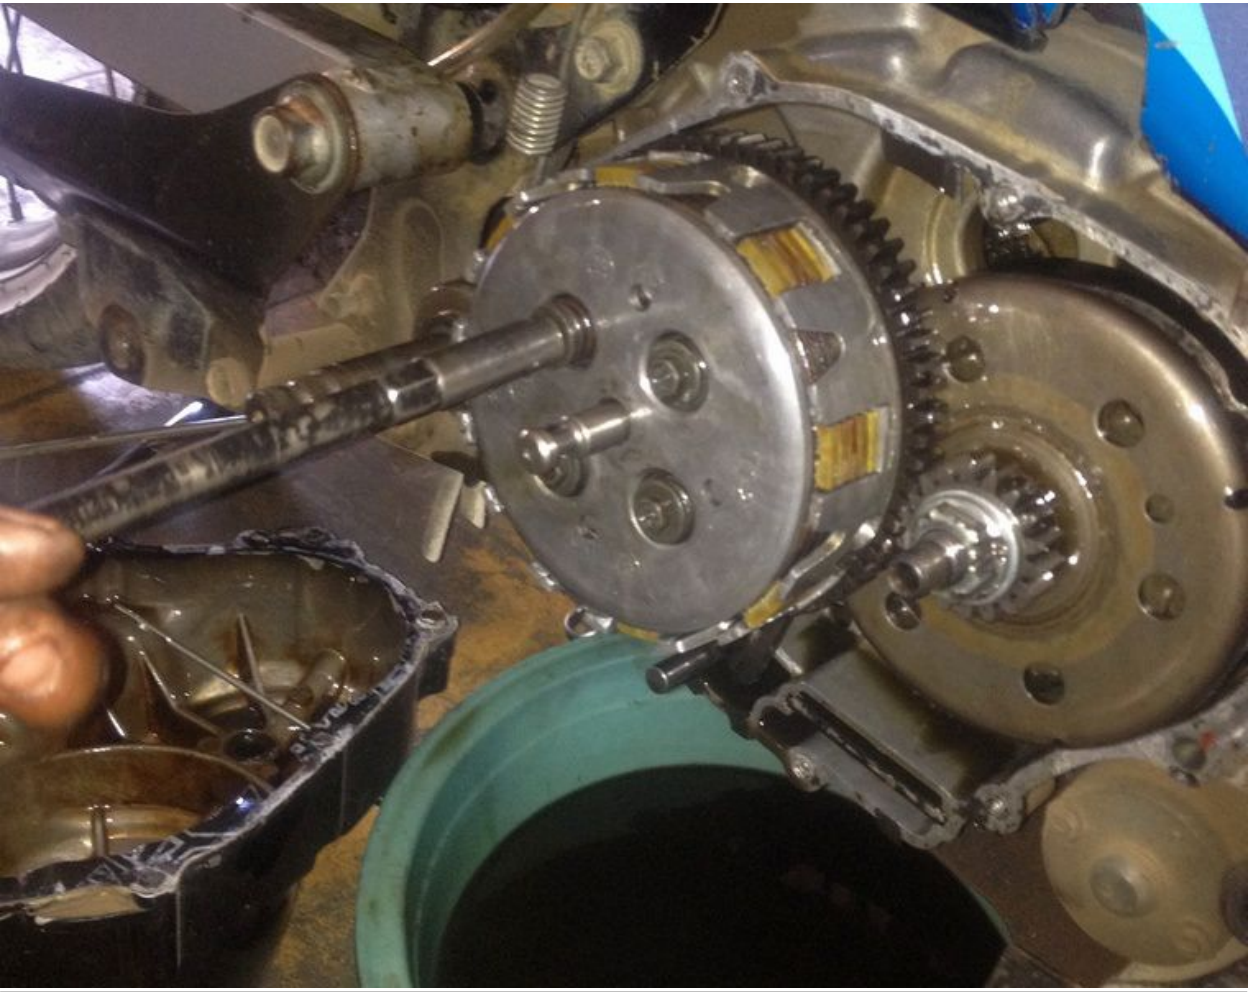

Next step is to insert items in the package to the clutch case.
First insert item no.8 from the hole on the top and then item no.6 (seal)

When inserting item no.8 you will need to push it a little bit with proper tool





Then insert item no.4 and no.5 (rings)






Then insert item no.9 and no.3 and then no.7

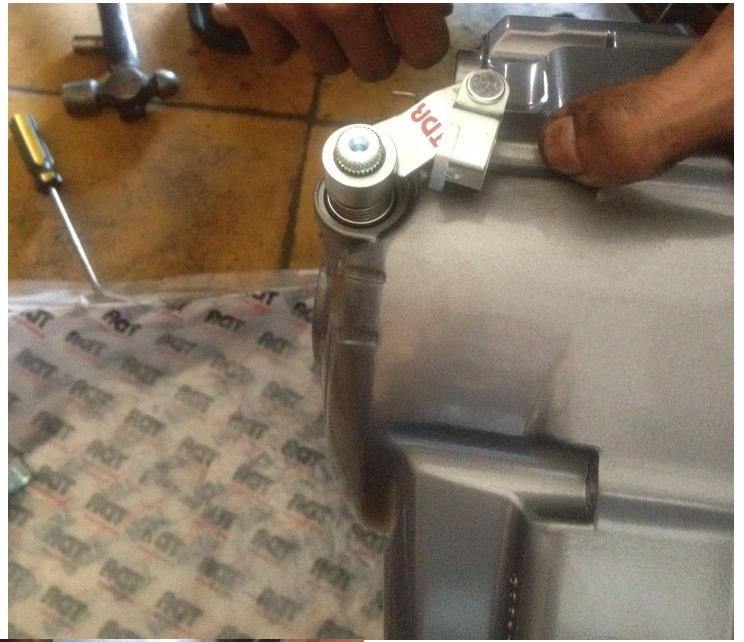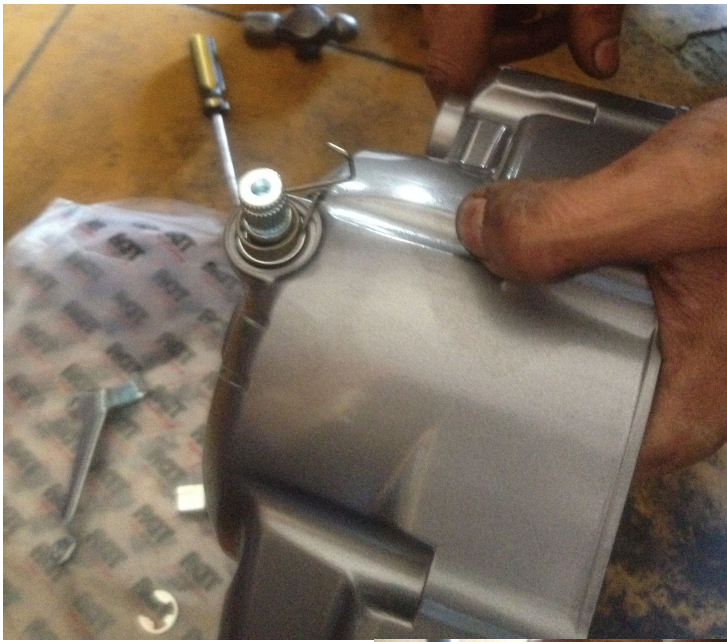

Put the new case to the bike

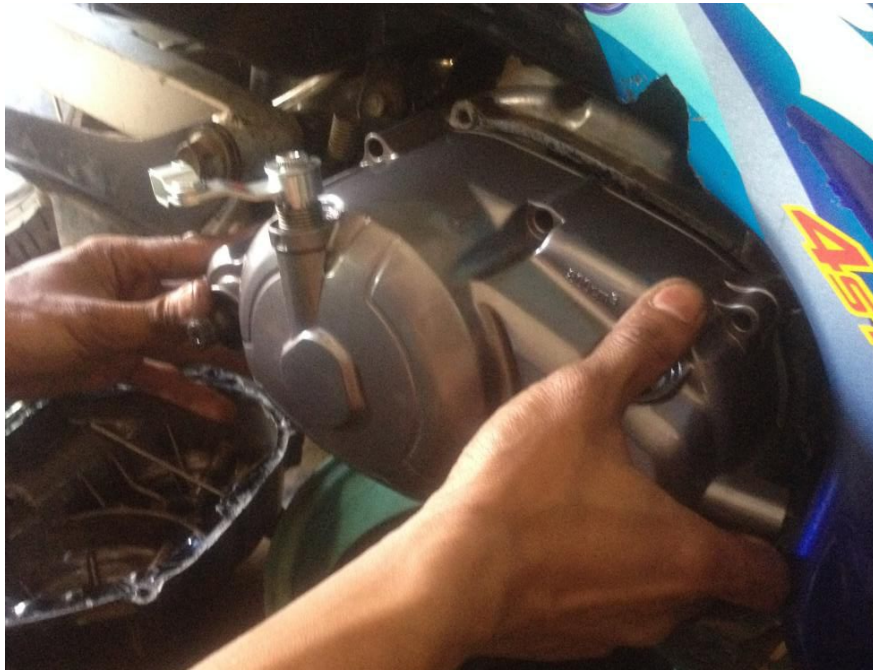

Final step is to put item no.1 and attach the cable just like picture below
Then adjust the clutch cable to the handle



www.sxparts.com

Powered by
WPS Office