

INSTRUCTIONS ON HOW TO TIGHTEN THE PROHOSE13 OR PROHOSE20 (To prevent any leakage occurring from your hose)

Step 1

Start with the male end and pull back the lime end of the hose exposing the fittings (Images 1 & 2)



Image 1



Image 2

Step 2.

Using a 22 mm ring spanner on one side and a 19mm spanner on the other side, push right to tighten the fitting. Once done, slide the lime rubber section back (Image 3)



Image 3

Step 3

Repeat the same process on the other end of the hose. Using an adjustable spanner on one side and a 11/16 ring spanner on the other side push right to tighten the fitting, then slide the lime rubber section back (Images 4, 5, 6 & 7)



Image 4

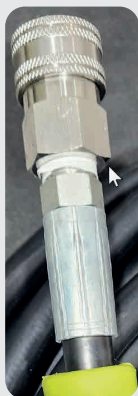


Image 5



Image 6



Image 7

Your hose is now ready for use!