

User Manual

Mono Solar Panel



Content

- Important ----- 1
- Limited Warranty ----- 2
- Safety Precautions ----- 4
- Electrical Parameters ----- 5
- Electrical Connections ----- 10
- Frequently Asked Questions ----- 11

Important

Thank you for choosing BougeRV Solar Panel.

Please read and understand the installation manual before installing BougeRV Solar Panel. With proper operation and maintenance, this solar panel could provide you with clean, renewable solar electricity for many years. This manual contains important installation, maintenance, and safety information. Retain this manual for future reference.


Limited Warranty


BougeRV Solar Panel comes with an **10-year limited warranty** that commences from the date of purchase. We offer the following two types of limited warranty for all BougeRV Mono Solar Panels:

1. 10 years Material & workmanship warranty
2. 25/30 years Linear power output warranty
 - 5 year 95% output warranty
 - 10 year 90% output warranty
 - 25/30 year 80% output warranty


If you have any questions during use, please feel free to contact BougeRV Tech Support:

It is recommended to choose the corresponding tech support team according to the purchasing platform to obtain a quicker response.

 (Amazon US/CA) service@bougerv.com
(BougeRV Website) support@bougerv.com

 1-408-656-8402 (Mon.-Fri. 9 am - 6 pm PST)

 www.bougerv.com


 1-669-232-7427


@BougeRV


@bougerv_official


@bougervofficial

Note: If you have any after-sales questions about the BougeRV solar panel, please provide **the barcode on the upper left corner** of the solar panel, the appearance picture of the solar panel, with the test parameters (voltage and current) and operating environment of the solar panel. We will respond within 24 hours.

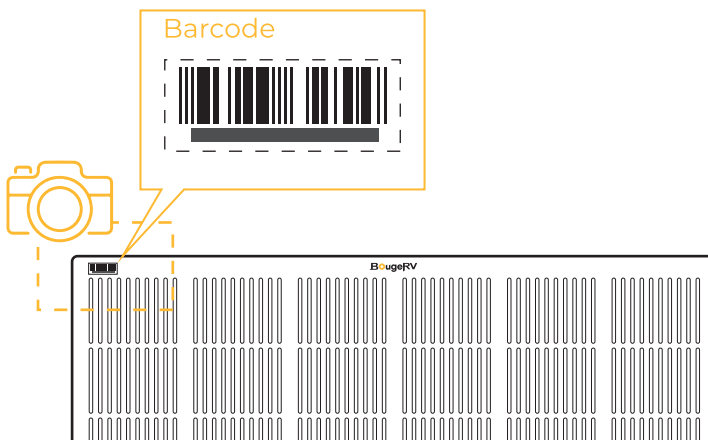

Before using the product, please carefully read the User Manual and the product disclaimer. Once you use the product, it will be deemed that you have understood, acknowledged, and accepted all the contents and terms of this document. BougeRV hereby disclaims any liability for any losses caused by users' failure to use the product in accordance with the user manual. On the premise of complying with laws and regulations, the company has the final right to interpret the documents and the documents related to this product.

Ps: The limited warranties do not apply to any of the following:

The solar panel which in BougeRV's absolute judgment have been subjected to misuse, abuse, neglect or accident, alteration, or improper installation, application, or removal. This includes, but is not limited to, installation, application, or removal by any party other than a BougeRV authorized dealer; non-observance of BougeRV's installation, user's and/or maintenance instructions; power failure surges, lightning, flood, fire, accidental breakage, or other events beyond BougeRV's control.

Safety Precautions

- Do not stand on, drop, scratch, or allow objects to fall on the solar panels as doing so may damage them and void the warranty.
- Do not place anything on the solar panel, even for a moment because the resulting residue may damage or stain the glass surface.
- If the front glass is broken, or the back sheet is torn, contact with any panel surface or panel frame can cause electric shock.
- Broken J-boxes or connectors are electrical hazards as well as laceration hazards. Installers should remove any such solar panel from the array and contact BougeRV for disposal instructions.
- Do not install or handle the solar panel when they are wet or during periods of high wind.
- Do not block drain holes or allow water to pool in or near module frames.
- Unconnected connectors must always be protected from pollution (e.g dust, humidity, foreign particles, etc), prior to installation. Do not leave unconnected (unprotected) connectors exposed to the environment. A clean assembly environment is therefore essential to avoid performance degradation.
- Save these instructions!

Electrical Parameters

P Type Mono Solar Panel

MODEL	100W SOLAR PANEL	200W SOLAR PANEL
Model Number	BJ100W-B016	BJ200W-B016
Peak Power Pm	100W±5%	200W±5%
Open circuit voltage Voc	21.4V±5%	22.5V±5%
Max.power voltage Vmp	18.15V±5%	19.1V±5%
Max.power current Imp	5.51A±5%	10.99A±5%
Short circuit current Isc	6.11A±5%	12.21A±5%
Solar cells Efficiciency	23%	23%
Operating temperature limits	-40°F~+185°F	-40°F~+185°F
Cable/ Cable connector Model	14AWG 3FT MC4 connectors	12AWG 3FT MC4 connectors
Max.static load, front(e.g.snow/wind)	2400 Pa	2400 Pa
Max.static load, back(e.g.,wind)	2400 Pa	2400 Pa
Max.hailstone impact (diameter/velocity)	227g stell ball fall down from 1m height and 60m/s wind	227g stell ball fall down from 1m height and 60m/s wind
Max.system voltage(V)	1000V DC	1000V DC
Series fuse rating	10A	15A
Application Class	Class A	Class A
Product Certification /Standard	CE,ETL	CE,ETL
Product diameter (mm)	995x540x35	1485x705x35

Electrical Parameters

P Type Mono Solar Panel

MODEL	300W SOLAR PANEL	400W SOLAR PANEL
Model Number	BJ300W-B064	BJ400W-B064
Peak Power Pm	300W±5%	400W±5%
Open circuit voltage Voc	20.8V±5%	37.07V±5%
Max.power voltage Vmp	17.5V±5%	31.01V±5%
Max.power current Imp	17.14A±5%	12.90A±5%
Short circuit current Isc	18.85A±5%	13.79A±5%
Solar cells Efficiency	23%	23%
Operating temperature limits	-40°F~+185°F	-40°F~+185°F
Cable/ Cable connector Model	12AWG 3FT MC4 connectors	12AWG 4.9FT MC4 connectors
Max.static load, front(e.g.snow/wind)	2400 Pa	2400 Pa
Max.static load, back(e.g.,wind)	2400 Pa	2400 Pa
Max.hailstone impact (diameter/velocity)	227g stell ball fall down from 1m height and 60m/s wind	227g stell ball fall down from 1m height and 60m/s wind
Max.system voltage(V)	1000V DC	1000V DC
Series fuse rating	20A	25A
Application Class	Class A	Class A
Product Certification /Standard	CE,ETL	CE,ETL
Product diameter (mm)	1640x880x35	1724x1134x35

Electrical Parameters

P Type Bifacial Mono Solar Panel

MODEL	100W BIFACIAL SOLAR PANEL	200W BIFACIAL SOLAR PANEL
Model Number	BJ100W-B-B016	BJ200W-B-B016
Peak Power Pm	100W±5%	200W±5%
Open circuit voltage Voc	20.1V±5%	20.1V±5%
Max.power voltage Vmp	17.1V±5%	17.1V±5%
Max.power current Imp	5.8A±5%	11.7A±5%
Short circuit current Isc	6.1A±5%	12.3A±5%
Solar cells Efficiency	23%	23%
Operating temperature limits	-40°F~+185°F	-40°F~+185°F
Cable/ Cable connector Model	14AWG 3FT MC4 connectors	12AWG 3FT MC4 connectors
Max.static load, front(e.g.snow/wind)	2400 Pa	2400 Pa
Max.static load, back(e.g.,wind)	2400 Pa	2400 Pa
Max.hailstone impact (diameter/velocity)	227g stell ball fall down from 1m height and 60m/s wind	227g stell ball fall down from 1m height and 60m/s wind
Max.system voltage(V)	1000V DC	1000V DC
Series fuse rating	15A	20A
Application Class	Class A	Class A
Product Certification /Standard	CE,ETL	CE,ETL
Product diameter (mm)	990 x 586 x 35	1451 x 771 x 35

Electrical Parameters

P Type Bifacial Mono Solar Panel

MODEL	300W BIFACIAL SOLAR PANEL	400W BIFACIAL SOLAR PANEL
Model Number	BJ300W-B-B064	BJ400W-B-B064
Peak Power Pm	300W±5%	400W±5%
Open circuit voltage Voc	40.7V±5%	37.1V±5%
Max.power voltage Vmp	34.8V±5%	31V±5%
Max.power current Imp	8.62A±5%	12.9A±5%
Short circuit current Isc	9.64A±5%	13.8A±5%
Solar cells Efficiency	23%	23%
Operating temperature limits	-40°F~+185°F	-40°F~+185°F
Cable/ Cable connector Model	12AWG 3FT MC4 connectors	12AWG 3FT MC4 connectors
Max.static load, front(e.g.snow/wind)	2400 Pa	2400 Pa
Max.static load, back(e.g.,wind)	2400 Pa	2400 Pa
Max.hailstone impact (diameter/velocity)	227g stell ball fall down from 1m height and 60m/s wind	227g stell ball fall down from 1m height and 60m/s wind
Max.system voltage(V)	1000V DC	1000V DC
Series fuse rating	15A	25A
Application Class	Class A	Class A
Product Certification /Standard	CE,ETL	CE,ETL
Product diameter (mm)	1640x880x35	1724x1134x35

Electrical Parameters


N Type TOPCon Bifacial Mono solar panel

MODEL	100w N Type TOPCon BIFACIAL SOLAR PANEL	200w N Type TOPCon BIFACIAL SOLAR PANEL
Model Number	TBJ100W-B-B016	TBJ200W-B-B016
Peak Power Pm	100W±5%	200W±5%
Open circuit voltage Voc	35.7V±5%	36.4V±5%
Max.power voltage Vmp	31.1V±5%	31.7V±5%
Max.power current Imp	3.2A±5%	6.3A±5%
Short circuit current Isc	3.4A±5%	6.6A±5%
Solar cells Efficiency	25%	25%
Operating temperature limits	-40°F~+185°F	-40°F~+185°F
Cable/ Cable connector Model	14AWG 3FT MC4 connectors	14AWG 3FT MC4 connectors
Max.static load, front(e.g.snow/wind)	2400 Pa	2400 Pa
Max.static load, back(e.g.,wind)	2400 Pa	2400 Pa
Max.hailstone impact (diameter/velocity)	227g stell ball fall down from 1m height and 60m/s wind	227g stell ball fall down from 1m height and 60m/s wind
Max.system voltage(V)	1000V DC	1000V DC
Series fuse rating	15A	15A
Application Class	Class A	Class A
Product Certification /Standard	CE,ETL	CE,ETL
Product diameter (mm)	853x586x35	1287x767x35


Electrical Connections

Series Connection

The panel may be wired in series to produce the desired voltage output.

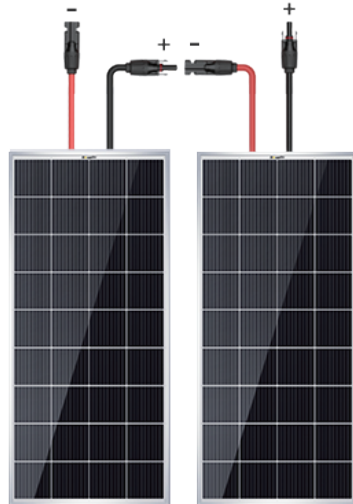

Series Connection

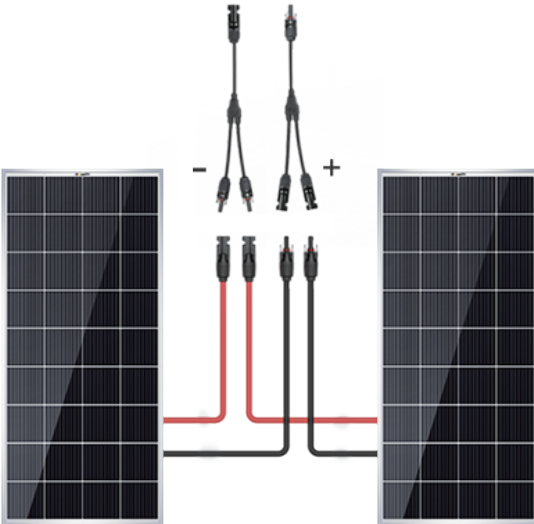

Parallel Connection

Parallel Connection

The solar panel can be wired in parallel to produce the desired current output with the parallel connector.

Frequently Asked Questions

Q1

How to choose the appropriate solar accessories that fit the solar panel if I want to build a solar system on my own?

A1

BougeRV provides you with professional technical services. You can send us your needs and the parameter information or instructions of your purchased accessories directly to our email: service@bougeerv.com, we will help you build the ideal DIY solar system.

Q2

What should I do if the solar panel I received is damaged, missing parts, or no output?

A2

Please send relevant pictures to our after-sales mailbox service@bougeerv.com immediately, and leave your order number. We will reply one by one according to the chronological order sent by the customers.

Q3

What causes the low output power or no output during the use of solar panels? How can I solve it?

A3

The output power of solar panels is mainly affected by light intensity, light angle, and shadow occlusion during the use of solar panels. Therefore, during daily use, the angle of illumination must be adjusted to prevent shadows, and the obstructions on the solar panel must be cleaned regularly, such as bird droppings, dust, and garbage. Such obstructions may cause the solar panel to not output at all.

Q4

Does it work with the portable power station?

A4

Yes, BougeRV solar panels with mc4 connectors are suitable for most portable power stations on the market. If you want to inquire about the specific model, please contact us.

BougeRV

Make The Journey