



BougeRV

BJ200W-B-B016

Bifacial 200W Monocrystalline Solar Panel

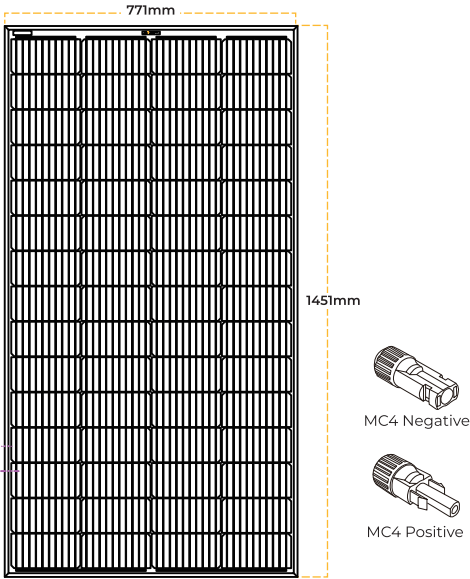

Front Profile (unit cm)

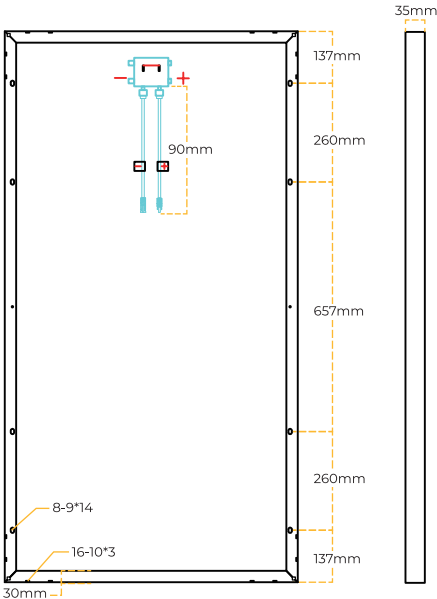

Back Profile (unit cm)

Side Profile (unit cm)

Electrical Data (STC)

Maximum Power (Pmax)	200W±5%
Solar cells Efficiency	23%
Max. Power Voltage (Vmp)	17.1V±5%
Max. Power Current (Imp)	11.7A±5%
Open Circuit Voltage(Voc)	20.1V±5%
Short Circuit Current(Isc)	12.3A±5%
Max. System Voltage	1000V DC
Max. Series Fuse Rating	20A
"STC: Irradiance: 1000W/m ² , Temperature: 25°C, Air Mass: 1.5"	

Mechanical Data

Mono Solar Cells	10BB 7.2 x 3.6 in (182 x 91mm)
Number of Cells	60 (4 x 15)
Dimension	57.1 x 30.4 x 1.4 in (1451 x 771 x 35 mm)
Weight	26.0lb (11.8KG)
Front Tempered Glass	0.13in (3.2mm)
Junction Box	IP68
MC4 Cables	12 AWG(4.0mm ²) 3FT (900mm)
Frame	Anodized Aluminum Alloy

Temperature Characteristics

Temperature Coefficient of Pmax	-0.39%/C
Temperature Coefficient of Voc	-0.33%/C
Temperature Coefficient of Isc	-0.06%/C
Operating Temperature Limits	-40°F~+185°F / -40°C~+85°C

Warranty

- 10 years Material & workmanship warranty
- 25 years Linear power output warranty
- (Please refer to product warranty for details)

⚠ WARNING ELECTRICAL HAZARD

Before using this product, please read the user manual carefully and properly keep for reference.

CONTACT US

- ✉ (Amazon US/CA) service@bouge rv.com
(BougeRV Website) support@bouge rv.com
- ☎ 1-408-656-8402 (Mon.-Fri. 9 am - 6 pm PST)
- 🌐 www.bouge rv.com
- 📞 1-669-232-7427

Made in Malaysia