



We Know Water.

BI-LEVEL VERSACOOLER® II W/ MECHANICAL BOTTLE FILLER

• **PG8SBFSL** • **PGSBFSL**

Suggested Specification

Model PG8SBFSL shall deliver 8.0 gph of 50°F degree water at 90°F ambient and 80°F inlet water. Model PGSBFSL is a non-refrigerated drinking fountain and delivers ambient water. Both shall include the VersaFiller Sports Bottle Filler with independent manual activation; lower unit must have four push pads to activate the manual flow of water for the cooler. VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discoloration, odors and degradation. Basin shall be designed to eliminate splashing and standing water. Water saver bubbler reduces waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be sandstone on galvanized steel or brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI 372.

	PG8SBFSL	PGSBFSL
Features:	<ul style="list-style-type: none"> • Universal design allows universal installation • Built-in 100 micron strainer stops particles before they enter the waterway • Lead-free waterways • Flexible and one-piece antimicrobial water saver bubbler guard • Stainless steel top and heavy duty galvanized steel frame • High efficiency cooling system • Four push pads • External stream height adjustment on lower unit • Independent mechanically activated VersaFiller 	
Filtration:	Option to add VersaFilter Filtration System	
Power:	115 Volts, 60 Hz	
Activation By:	Manual Activation on Fountains and Independent Manual Activation on Bottle Filler	
Mounting Type:	Wall Mounted	
Chilling Option:	8.0 gph	Non-Refrigerated
Installation Location:	Indoor	



WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov

*Industry standard rating condition 80°F inlet water temperature



Installation

- Prior to rough-in consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation.

Finishes

- Standard cabinet finish: Sandstone powder coated paint on galvanized steel.
- Optional finishes (at additional cost): Stainless steel.

Options

- Antimicrobial chrome plated brass bubbler (036700-001)
- VersaFilter
- Cane apron (035174-001)

Limited 5-Year Warranty

(Continental limits of the United States and Canada)
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.


Certifications/Compliance

- Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only). • These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.



Specifications subject to change without notice

OASIS® BI-LEVEL VERSACOOLER® II W/ MECHANICAL BOTTLE FILLER

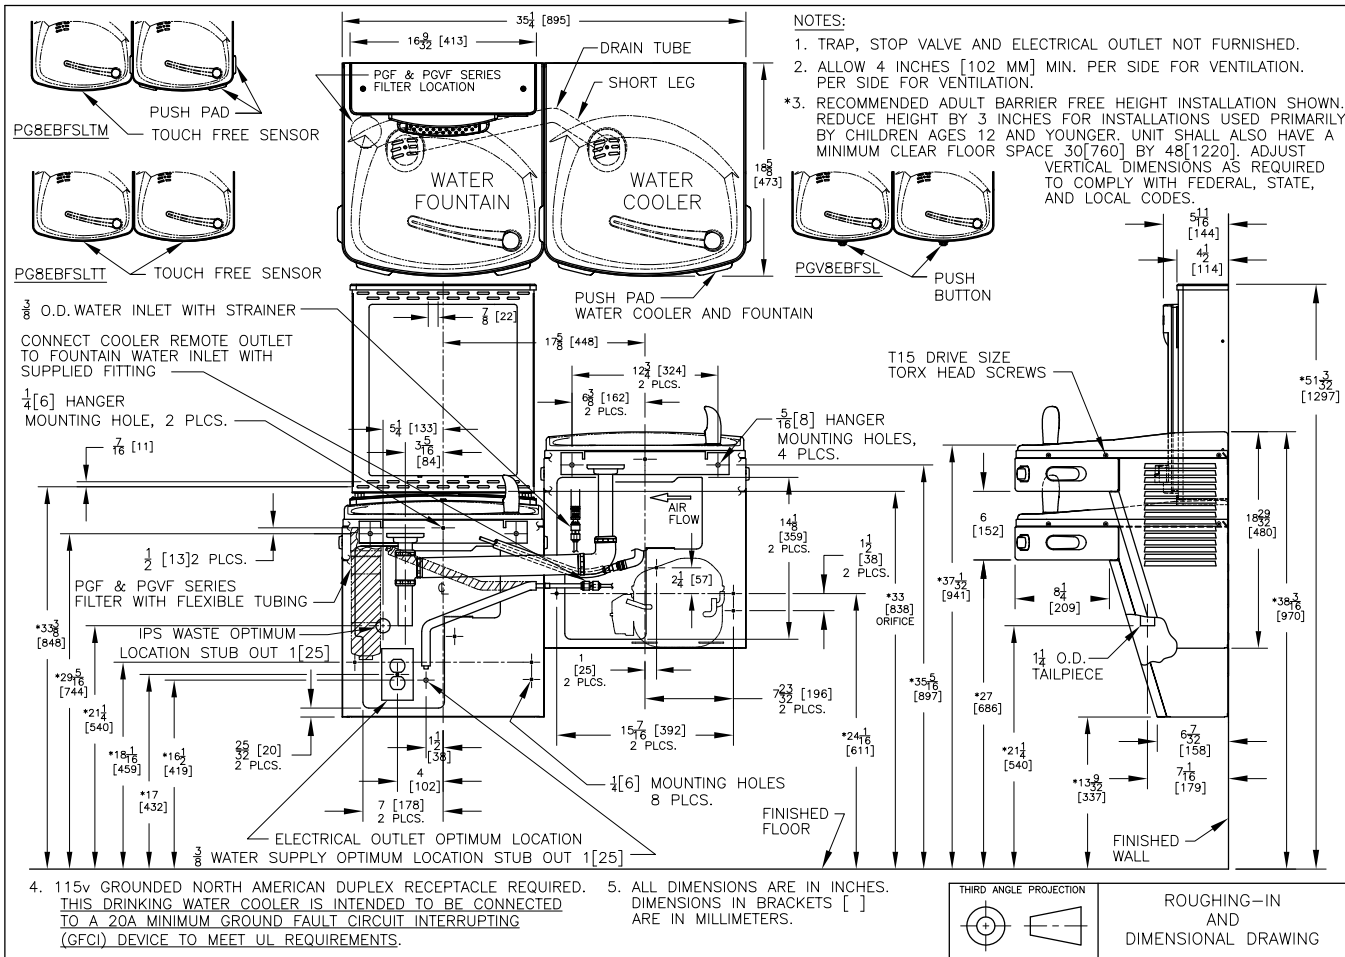

EQUIPARTS
 Repair Parts Specialists

TOLL FREE: 800-442-6622
PITTSBURGH: 412-781-9100
www.equiparts.com

That Hard to Find Part is Right Here!