



## VANDAL RESISTANT VERSACOOLER® II

### Energy and Water Conservation Technology

### PGV8AC, PGVAC

#### Suggested Specification

Model PGV8AC shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PGVAC is a non-refrigerated fountain. Shall include a single vandal resistant push button to activate the flow of water. Basin shall be designed to eliminate splashing and standing water. Water saver bubbler reduce waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be brushed stainless steel. Cabinet shall have perforated galvanized steel screens to prevent objects from being inserted into the cooler. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI 372.

#### Models

- PGV8AC delivers 8.0 gallons of chilled drinking water per hour
- PGVAC is a non-refrigerated fountain

#### Standard Features

- Built-in 100 micron strainer stops particles before they enter the waterway
- Vandal resistant water saver bubbler with flexible guard
- Vandal resistant mechanical front push button
- Vandal resistant fasteners
- Galvanized steel louver and bottom screens
- Waterways are Lead-Free in materials & construction
- Stainless steel top and heavy duty galvanized steel frame
- High efficiency cooling system

#### Finishes

- Standard cabinet finish: Stainless steel

#### Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

#### Options (at additional cost)

- One piece chrome plated brass bubbler (036700-001)
- VersaFilter

#### Limited 5-Year Warranty

(Continental limits of the United States and Canada)  
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

#### Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

#### Certifications/Compliance

- Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only).
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.



Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx
	Rated Capacity GHP	Base Rate GHP	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PGV8AC	8.0	8.0	No	No	1/4	4.4	440	No	No	62 Lbs
PGVAC	Fountain Only							No	No	32 Lbs

\* Industry Standard Rating Condition 80° F inlet water temperature


Specifications subject to change without notice

# OASIS® VERSACOOLER® II

OPTIONAL GLASSFILLER LOCATION

PGF SERIES FILTER LOCATION


18<sup>5</sup>/<sub>8</sub> [473]

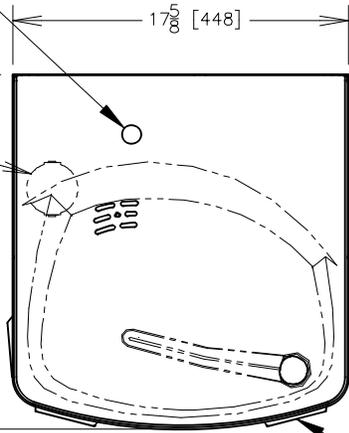


PUSH PADS  
NON-TOUCH FREE  
MODELS ONLY

**NOTES:**


1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
- \*3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.




PUSH BUTTON



TOUCH FREE SENSOR

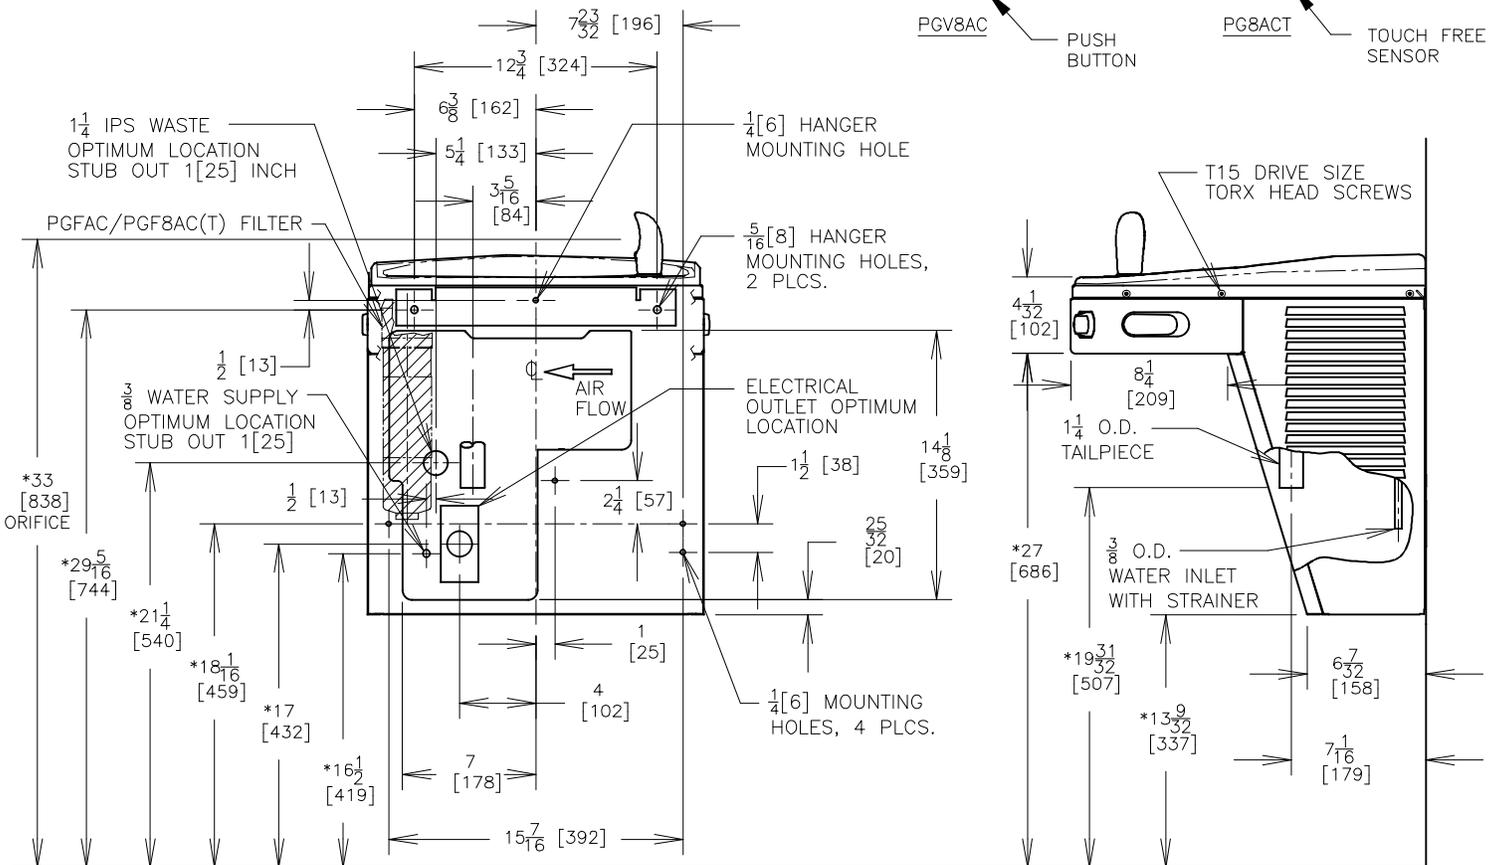

THIRD ANGLE PROJECTION



ROUGHING-IN AND DIMENSIONAL DRAWING

