



VANDAL RESISTANT, BARRIER-FREE VERSACOOLER® II
Energy and Water Conservation Technology
PGV8EBFSL, PGVEBFSL

Suggested Specification

Model PGV8EBFSL shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PGVEBFSL is a non-refrigerated fountain and delivers ambient water. Shall include the VersaFiller Electronic Bottle Filler; lower unit shall have a single vandal resistant push button to activate the flow of water. VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discoloration, odors and degradation. Basin shall be designed to eliminate splashing and standing water. Water saver bubbler reduce waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be sandstone on galvanized steel or brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI 372.

Models

- PGV8EBFSL delivers 8.0 gallons of chilled drinking water per hour
- PGVEBFSL is a non-refrigerated fountain

Standard Features

- Universal design allows universal installation
- Built-in 100 micron strainer stops particles before they enter the waterway
- Vandal resistant bubbler with flexible guard
- Vandal resistant mechanical front push button
- Vandal resistant fasteners
- Galvanized steel louver and bottom screen
- Waterways are Lead-Free in materials & construction
- Stainless steel top and heavy duty galvanized steel frame
- High efficiency cooling system and refrigerant R-134a
- Electronic VersaFiller bottle filler

Finishes

- Standard cabinet finish: Stainless steel

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

Options (at additional cost)

- One piece chrome plated brass bubbler (036700-001)
- Flow switch for fountain (038035-001)
- VersaFilter

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for “Lead Free” plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only).
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot°N Cold Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx
	Rated Capacity GHP	Base Rate GHP	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PGV8EBFSL	8.0	8.0	No	No	1/4	4.5	458	No	No	100 Lbs
PGVEBFSL	Fountain Only							No	No	66 Lbs

* Industry Standard Rating Condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS® VERSACOOLER® II

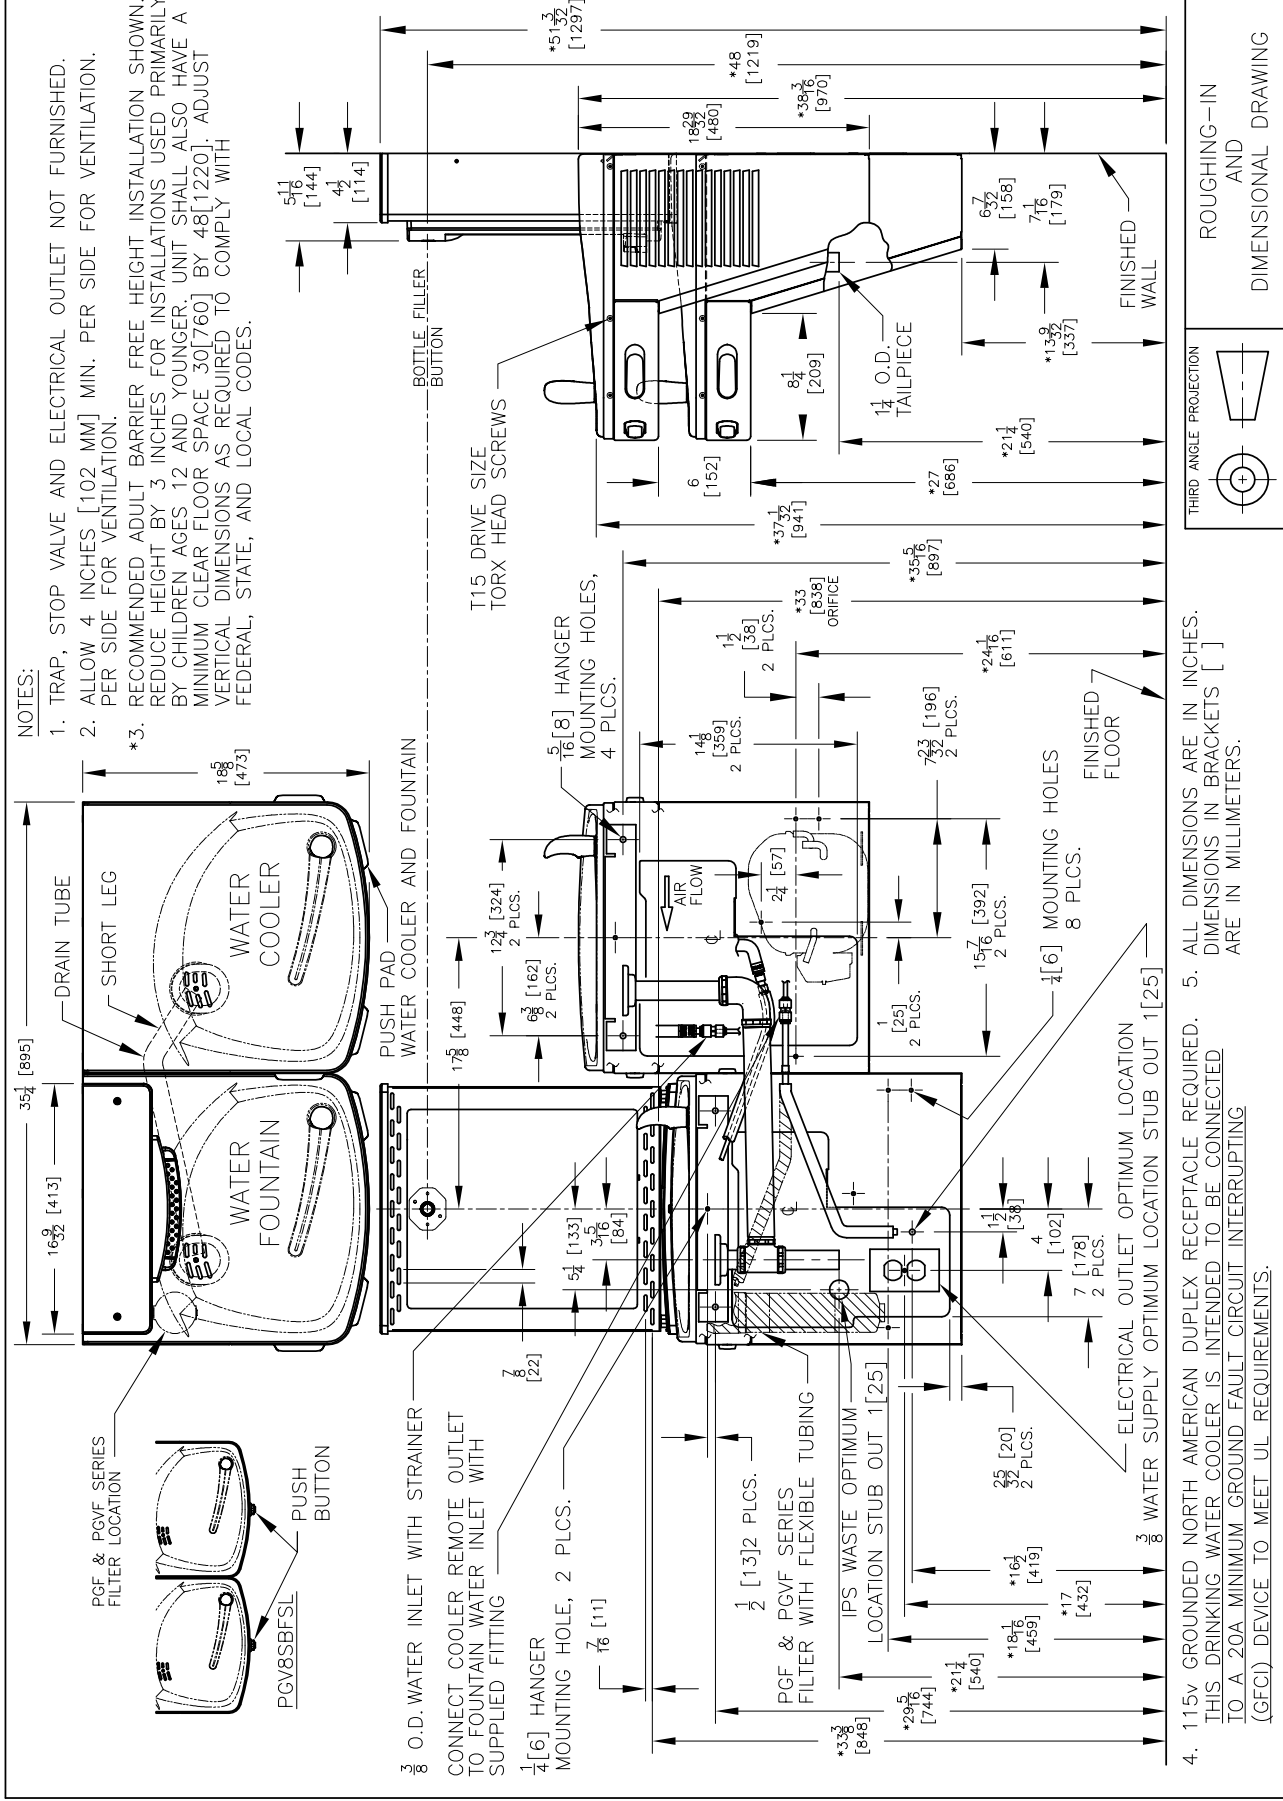

Rev. 01/2015

Oasis International | 222 East View Campus View Blvd. | Columbus, OH 43235

For customer service and technical helpline assistance call: 800.950.3226

Oasis is a registered trademark of LVD Acquisition, LLC dba Oasis International

© 2015 LVD Acquisition



www.oasiscoolers.com