



CONTEMPORARY DRINKING FOUNTAINS

GV Series

MODEL GVC59

BARRIER FREE,
WALL MOUNTED DRINKING FOUNTAIN

STANDARD FEATURES

- Both Child and Adult Compliant (when properly installed)
- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- P-trap, 1-1/4" O.D.
- Vandal resistant galvanized steel bottom plate and screws
- Mounting plate

SUGGESTED SPECIFICATIONS

Model GVC59 is a wall mounted, vandal resistant drinking fountain made from an 18 gage, 304 stainless steel bowl mounted into a brown concrete aggregate arm. Unit shall be activated by a front mounted self-closing button, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished stainless steel with a non-squirt feature and operate on water pressure range of 20-105 psig. Fountain is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.



MODEL:

(Must Specify)

- GVC58 Tan Concrete Aggregate
- GVC59 Brown Concrete Aggregate (Shown)

OPTIONS

(additional costs may be incurred)

- CSC Concealed support carrier
- FRA1 Freeze resistant valve



Member of
U.S. Green
Building
Council



Recyclable
Product



Water
Conserving
Product

Please visit www.murdock-supersecur.com
for most current specifications.

Complies
with the
following
standards:



NSF/ANSI 61



UPC
Water Efficiency



Federal
Public Law
111-380
(No Lead)



CHSC
116875

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL



CONTEMPORARY DRINKING FOUNTAINS


All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

GV Series

MODEL GVC59

BARRIER FREE,

WALL MOUNTED DRINKING FOUNTAIN

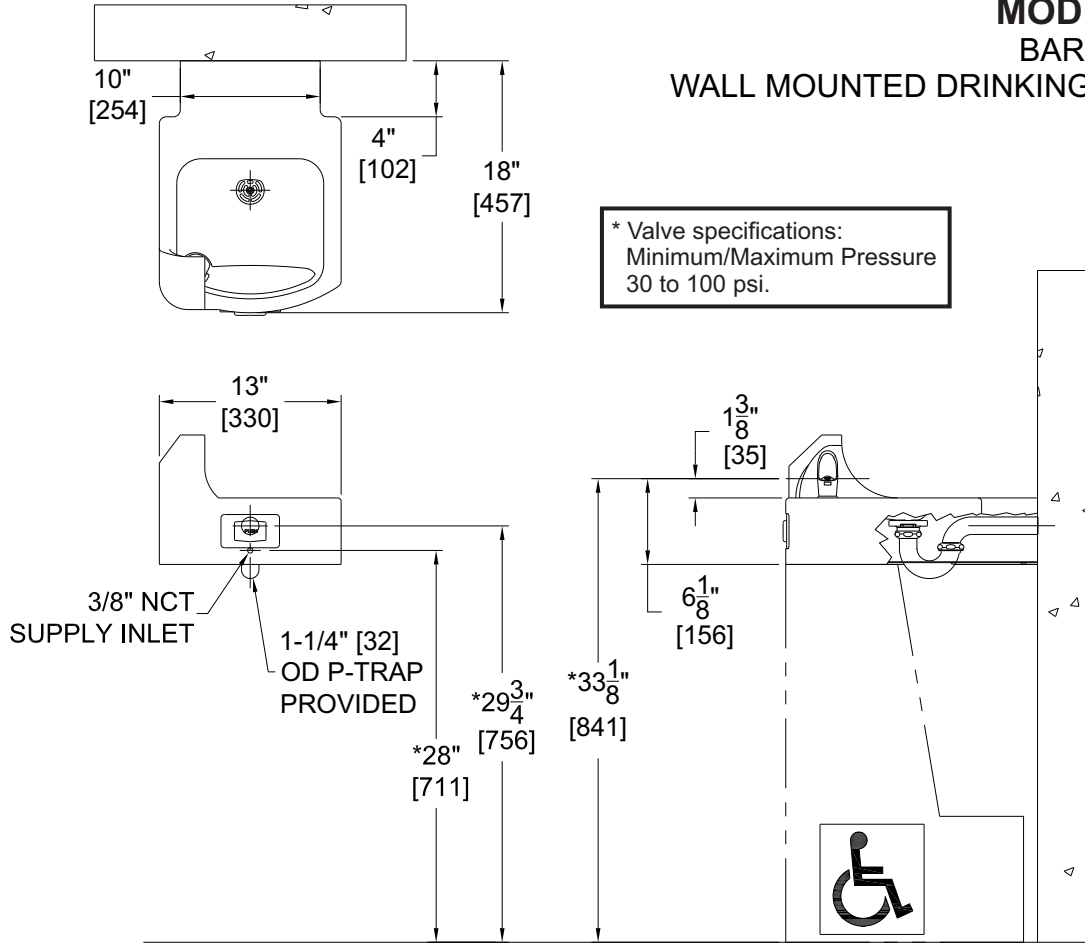

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT.
ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH
FEDERAL, STATE, & LOCAL CODES.
3. STOP VALVE NOT PROVIDED.

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	