



OASIS INTERNATIONAL

AQUA POINTE™

UNIVERSAL BI-LEVEL MODULAR WITH BUILT IN SENSOR ACTIVATED BOTTLE FILLER

M8CREBF

Suggested Specification

MODEL M8CREBF

Shall deliver 8gph of 50°F water at 90°F ambient and 80°F inlet water to a bi level modular fountain with vadal resistant mechanical push button and a low flow one piece bubbler with flexible guard. Water flow to the bottle filler is by means of an electronically activated solenoid. Key AquaPointe bottle filler component contain FRESHSHIELD which utilizes a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discoloration, odors and degradation. Basin shall be designed to eliminate splashing and standing water. Cooling system shall use R-134a refrigerant. Shall comply with ANSI A117.1 and ADA.

Model

M8CREBF delivers 8.0 gph of chilled drinking water.

Standard Features

- Built-in 100 micron strainer stops particles before they enter the waterway
- Waterways are Lead-free in materials and construction
- Heavy duty steel frame
- Flexible one piece water saver bubbler guard
- High efficiency cooling tank and coil
- Refrigerant R-134a
- Hands free bottle filler with 20 second shut off, integrated counter and filter monitor
- Built in panel locks for easy access to chiller and filtration

Installation

- Prior to roughing, consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable front panels allow for easy access to filtration and refrigeration unit
- Recessed mounting frame included, but water supply, electrical and waste drain required.



Universal Installation

Options (at additional cost)

- One Piece Chrome Plated Brass Bubblers
- Optional 12 gph Chiller (M12CREBF)
- Oasis Green Filter System

Finishes

Standard cabinet finish: Brushed Stainless Steel

Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

ADA compliant for reach ranges. These models meet guidelines for children's (ages 5 and up) accessibility providing the floor to button height is less than 40 inches and proper clear floor space is provided for frontal approach. Fountain is ADA compliant for Adults in Wheelchairs.

Product certified to NSF/ANSI standard 61, Annex G (weighted average lead content of <=0.25%) and is in compliance with California's health and safety code section 116875 (commonly known as AB1953). The green filter has been tested to ANSI/NSF standards 42 not by NSF.

Models covered by this specification comply with all known plumbing codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.




| Model | 50° F Drinking Water 90° F Ambient Air Temp* | | 115 Volts, 60 HZ | | | Cabinet Color Finish | Net Wt. Approx. |
|---------|---|------------------|------------------|-------------------|----------------|-------------------------|--------------------|
| | Rated Capacity GPH | Base Rate GPH | Compr. HP | Full Load Amps | Rated Watts | | |
| M8CREBF | 8.0 | 8.0 | 1/4 | 4.8 | 550 | NO | 186 Lbs. |

*Industry Standard Rating Condition 80°F inlet water temperature.


Specifications subject to change without notice

OASIS® RADII™ MODULAR SPLIT LEVEL FOUNTAIN

WITH VersaFiller® HANDS FREE BOTTLE FILLER MODELS M8CREBF

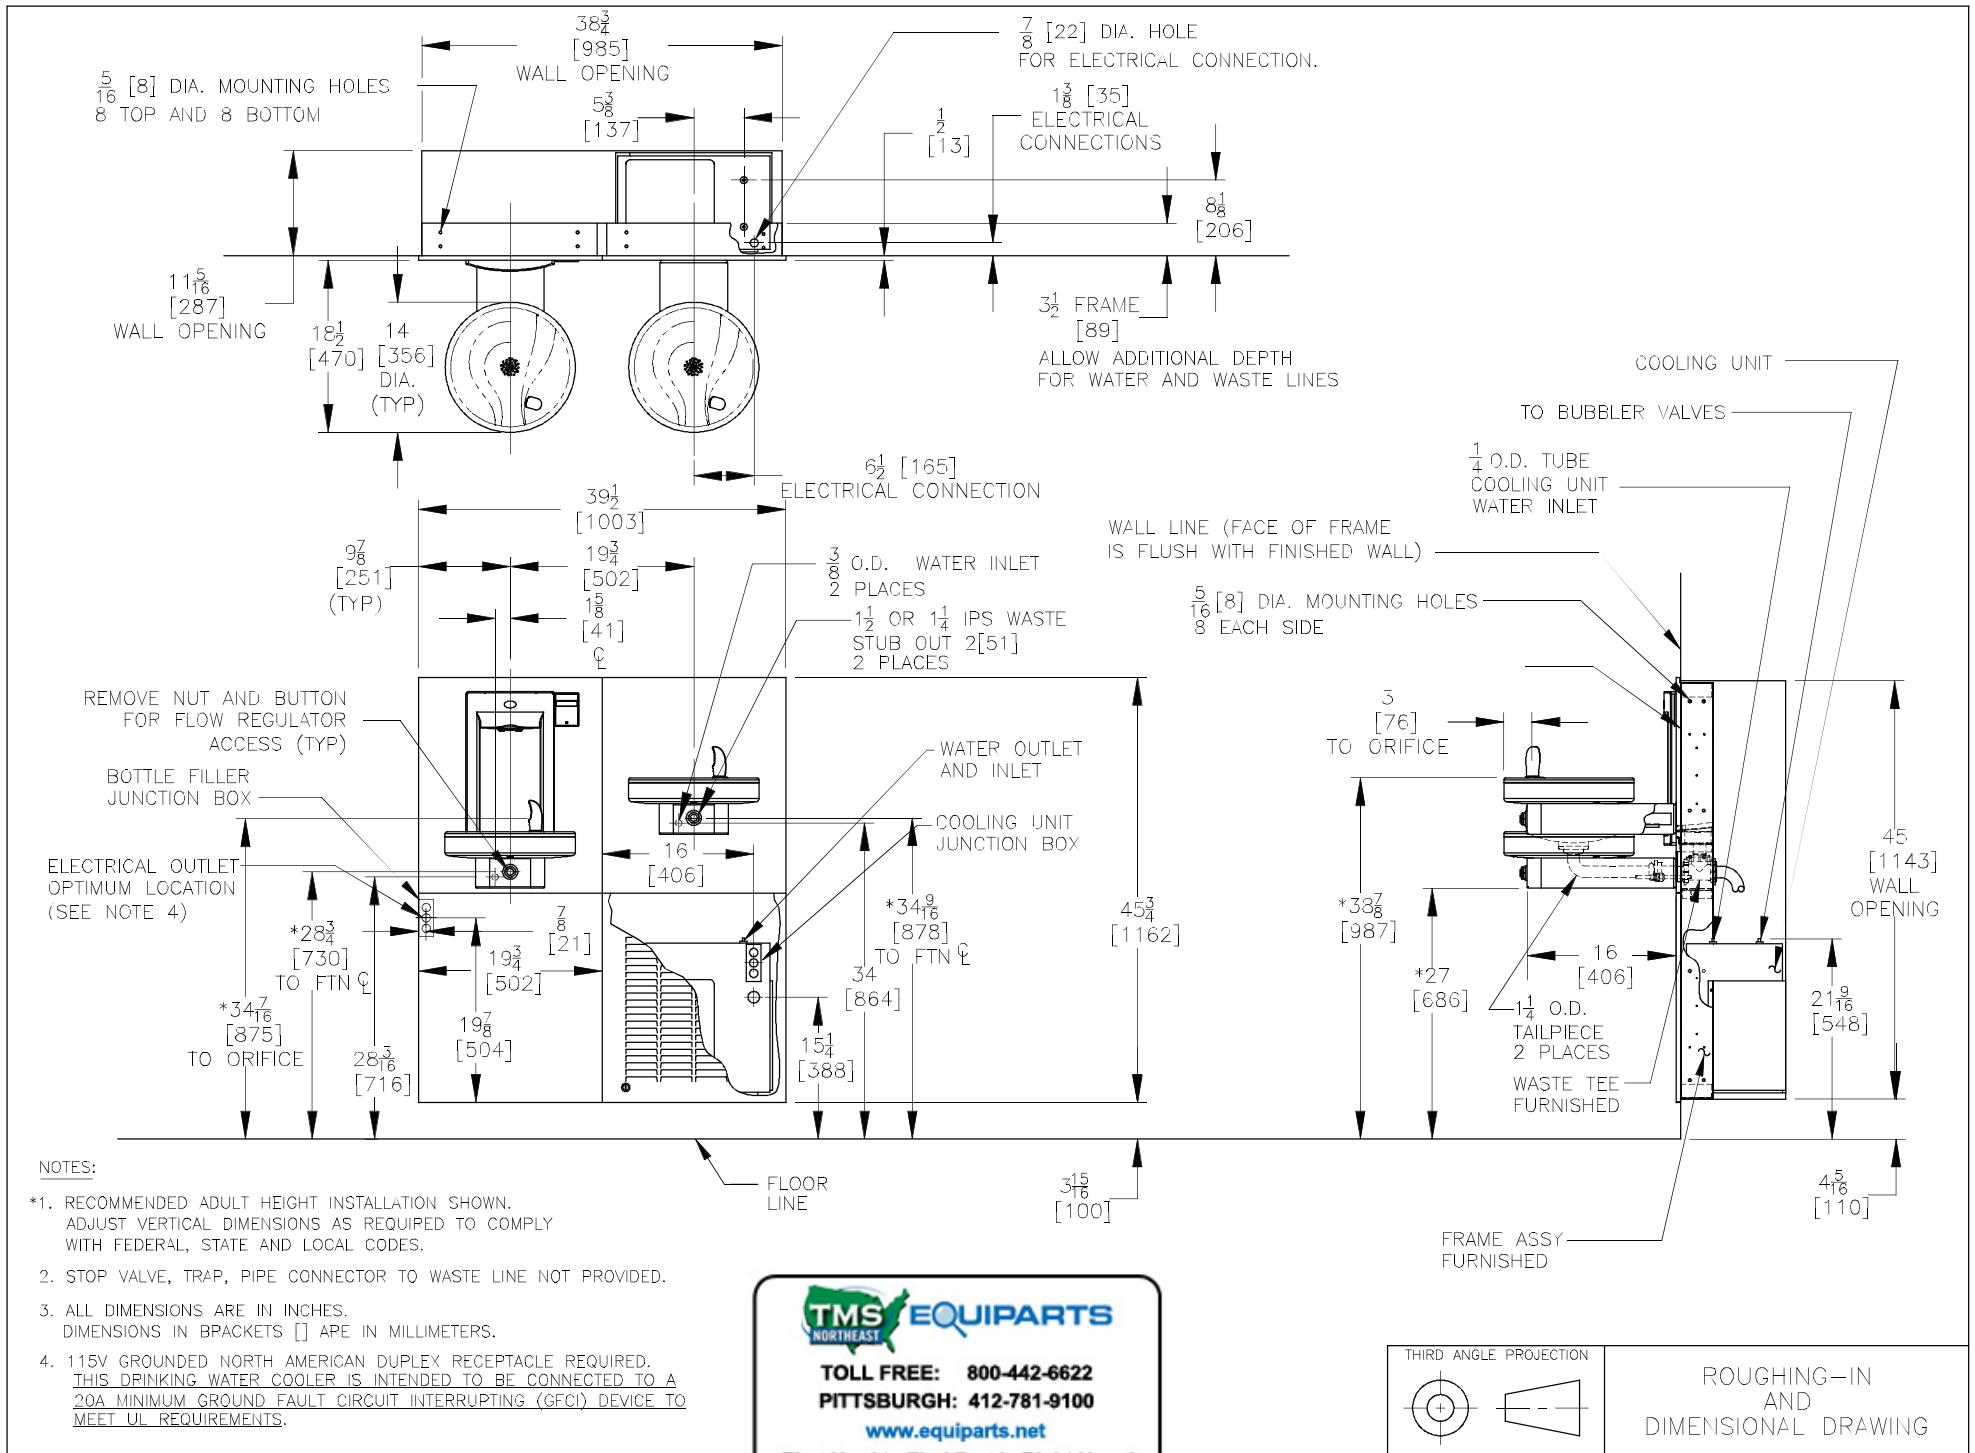


TOLL FREE: 800-442-6622
PITTSBURGH: 412-781-9100
www.equiparts.net
That Hard to Find Part is Right Here!



ROUGHING-IN
AND
DIMENSIONAL DRAWING