

## Replacing the Bubbler on the EZ style cooler

### **IMPORTANT**

**THIS IS AN INDOOR APPLICATION ONLY.  
ALL SERVICE TO BE PERFORMED BY AN  
AUTHORIZED SERVICE PERSON**


#### **TOOLS REQUIRED BUT NOT PROVIDED**

- Gloves
- Safety Glasses
- Phillips Head Screwdriver
- 1-1/16" and 1-1/8" Socket
- Ratchet with extension
- Pliers or adjustable wrench
- 5/16" nut driver

Remove the lower wrapper on the cooler and turn the water off to the unit. Push the activation button on the cooler to release any water pressure in the water lines.


Unplug the water cooler

Remove the access panel located directly under the bubbler on the underside of the shroud. (See image below.) Remove the one retaining screw and the panel can be removed, place them to the side as these will be re-installed later.

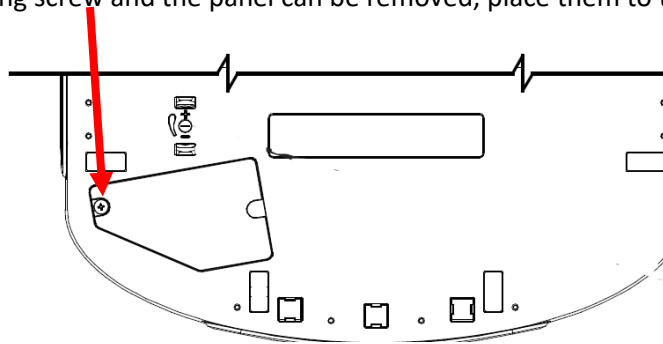

Locate the water line going into the bottom of the Bubbler held in place by a quick connect fitting. Push up on the fitting collet to release the waterline, pulling down on the waterline while pushing up on the push fitting will release the water line. **NOTE: Do not cut the water line! You will need to install it into the nipple of the gasket kit later.**

#### OPERATION OF QUICK CONNECT FITTINGS

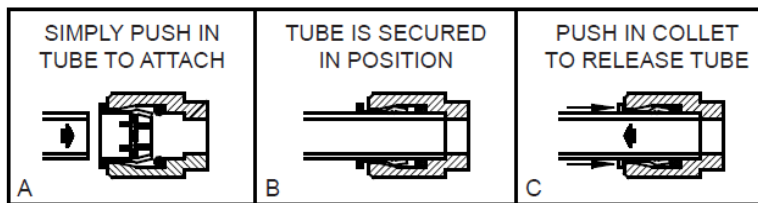

PUSHING TUBE IN BEFORE PULLING IT OUT HELPS TO RELEASE TUBE

## Replacing the Bubbler on the EZ style cooler

Once the waterline is removed, use a 1- 1/16" socket to remove the nut on the underside of the bubbler. Remove the bubbler by pulling it straight up. Clean the surface area around the bubbler location.

### **Install the 75581C Cap & 1000001792 Brass Nipple/Gasket kit.**

Place one gasket on the brass nipple and push it from the underside of the basin through the hole where the bubbler came out.

Place the other gasket on the brass nipple on the top side of the basin.

Screw the bubbler cap onto the brass nipple. Tighten the brass nipple from the underside of the cooler using a 1-1/8" socket while holding the cap with pliers or an adjustable wrench but do not over tighten.

The brass nipple has a built-in push fitting. Insert the water line, that you removed from the bubbler, into the end of the brass nipple making sure it fully inserts into the fitting.

Once the water line is fully inserted into the nipple, plug in the power cord. Slowly turn the water back on. Push the activation buttons on the cooler and check the fittings for leaks. Check at the point where you inserted the water line into the brass nipple and the bubbler cap. Repair any leaks as needed.

Once there are no leaks, your unit is ready to be used.

Replace the access panel on the bottom of the upper shroud.

Replace the lower wrapper on the cooler.

If your water cooler has a bottle filler, place a water bottle under the bottle filler and run some water through the unit. This allows any air that might have worked its way into the water lines to clear.

### **Finished Photo**

