



SIMULATED SEMI-RECESSED PLF8SM, PLF14SM

Suggested Specification

Model PLF8SM shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PLF14SM shall deliver 14.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water Cabinet finish shall be sandstone powder coated paint on galvanized steel or brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI 372.

Models

- **PLF8SM** delivers 8.0 gph of chilled drinking water
- **PLF14SM** delivers 14.0 gph of chilled drinking water

Standard Features

- Dial-A-Drink® bubbler
- Waterways are Lead-Free in materials & construction
- Stainless steel top
- Welded, heavy-gauge steel frame
- High efficiency cooling system

Finishes

- Standard cabinet finish: Sandstone powder coated paint on galvanized steel
- Optional finishes (at additional cost): Stainless steel

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

Limited 5-Year Warranty

(Continental limits of the United States and Canada)
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for “lead free” plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only).




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx
	Rated Capacity GHP	Base Rate GHP	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF8SM	8.0	8.0	No	No	1/5	4.3	500	No	Yes	67 Lbs
PLF14SM	14.0	8.0	Yes	No	1/5	4.3	500	No	Yes	69 Lbs

* Industry Standard Rating Condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS® SIMULATED SEMI-RECESSED WATER COOLER MODELS PLF8SM, PLF14SM

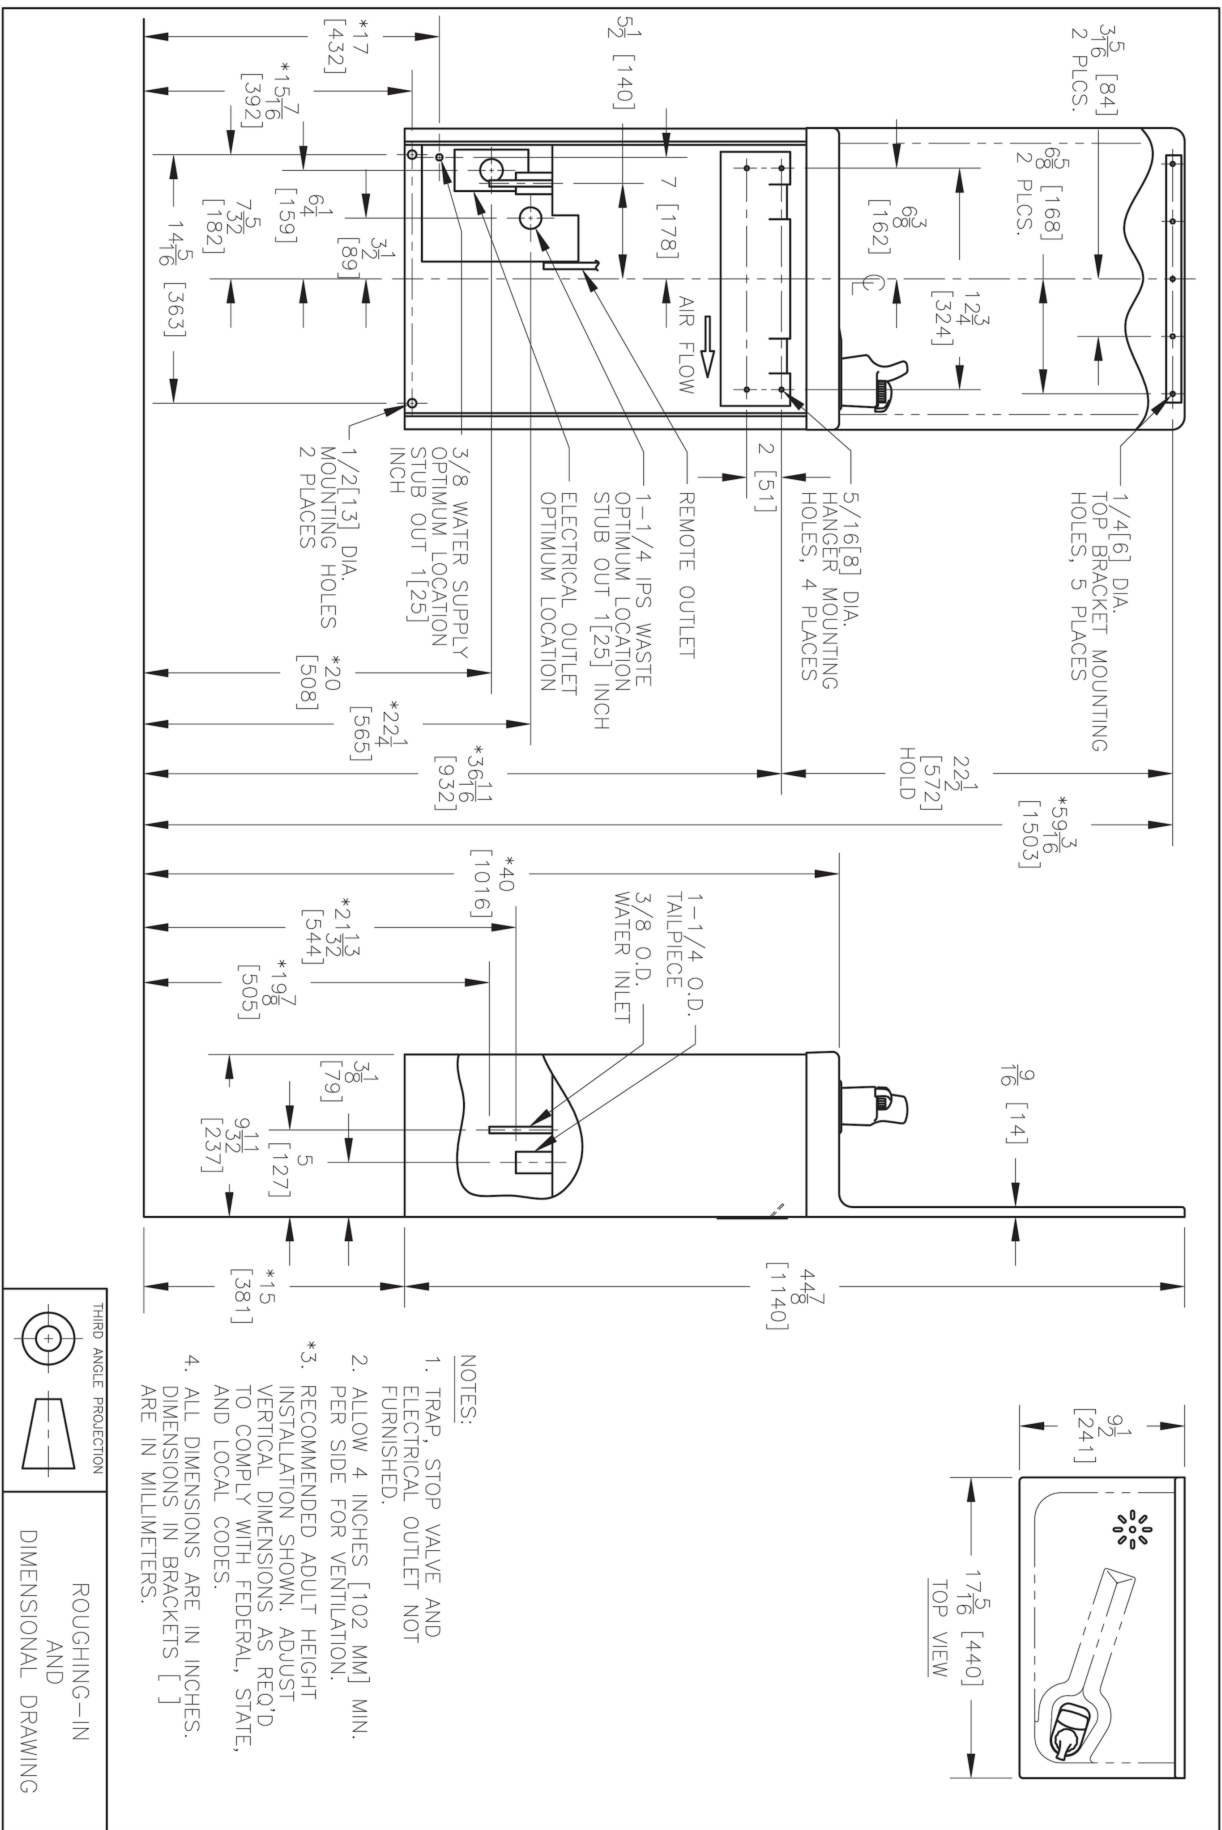

Oasis International, 222 East View Campus View Blvd., Columbus, OH 43235
 For customer service and technical helpline assistance call: 800.950.3226

Oasis and VersaCooler are registered trademarks of LVD Acquisition, LLC dba Oasis International. © 2016 LVD Acquisition



www.oasiscoolers.com