

4K Ultra HD Smart TV with Pro:Centric Direct



4K UHD



Pro:Centric Cloud





Pro:Idiom

UM670H Series

Design	Stand Type	65": 1 pole (Fixed) 55" / 50" / 43": 1 pole (Swivel)	
Display	Sizes	65" / 55" / 50" / 43"	
	Resolution	3,840 × 2,160 (4K UHD)	
Broadcasting System	Digital	ATSC, Clear QAM	
	Analog	NTSC	
VESA	65" / 55": 300 × 300 50" / 43": 200 × 200		



UM670H Series



Pro:Centric Cloud

Pro:Centric Cloud provides a convenient cloud-based environment for content management systems and other third-party software solutions that can be installed, updated and controlled from a central location. It also offers various design templates that provide eye-catching dashboards for analytics and data collection. In addition, the LG Channels app provides a convenient way to access a wide range of content from over-the-top channels (including broadcast TV) without additional devices or subscriptions. And LG's Mobile Application Creator simplifies the process of setting up concierge services on mobile devices for guests.



Pro:Centric Direct

The Pro:Centric Direct hotel content management solution offers simple editing tools, making it easy to perform service and IP network-based remote management with a single click. Pro:Centric Direct enables users to customize their interface easily and efficiently manage all TVs in the facility. The most recent version* provides IoT-based in-room control as well as voice control through LG Natural Language Processing.

* Some features may not be supported based on PCD versions.



Pro:Idiom

DRM (digital rights management) technology unlocks access to premium content to help assure rapid and broad deployment of HDTV and other high-value digital content. DRM technology also prevents any illegal copying of content.

UM670H Series



Slim Depth for a Sleek Look


With a slim design, the UM670H series integrates smoothly with interiors, delivering a modern impression to your guests.



SoftAP

Software-enabled Access Point* (SoftAP) is a virtual Wi-Fi feature that uses TV as a wireless hotspot, enabling guests to connect their own devices to the SoftAP.

* Screen Share may not be operated at the same time.

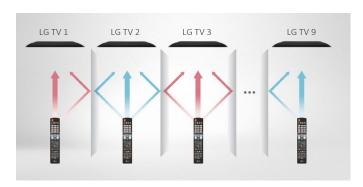

Multi-code IR

Multi-code IR* function eliminates any remote-control signal interaction between multiple TVs in one place. LG hospital TV supports this when used with the Multi-code IR remote control, so users can freely control their own TVs without disturbing the others.

 $\boldsymbol{*}$ Multi-code IR remote control is not provided by LG. (sold separately)



Voice Recognition


Voice recognition, using the LG Magic Motion Remote* with the UM670H Series makes it easy to control the TV without pressing the button of remote controls.

* Magic Motion Remote is required (sold separately)

CONNECTIVITY

65" / 55" / 50" / 43"



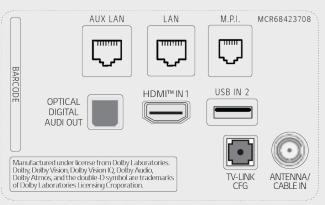

Side



UM670H Series

Category	Category	Pro:Centric Smart	Pro:Centric Smart	Pro:Centric Smart	Pro:Centric Smart
Display		65"	55"	50"	43"
	Diagonal				
	Resolution	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)
	Backlight Cabinet Type	Direct	Direct	Direct	Direct
	Brightness	330 nits	330 nits	330 nits	265 nits
	Dynamic Contrast Ratio	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1
	Static (Panel) Contrast Ratio	1,200:1	1,300:1	5,000:1	1,200:1
	Response Time	8 ms (G to G)	14 ms (G to G)	19 ms (G to G)	8 ms (G to G)
	Refresh Rate	60 Hz	60 Hz	60 Hz	60 Hz
	Life Span	30,000 Hrs.	30,000 Hrs.	30,000 Hrs.	30,000 Hrs.
Video	Al Picture Pro	Yes	Yes	Yes	Yes
	Dynamic Vivid	Yes	Yes	Yes	Yes
	HDR 10 Pro / HDR HLG	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes
	Game Optimizer	Yes	Yes	Yes	Yes
	Speaker (Sound Output)	10 W + 10 W	10 W + 10 W	10 W + 10 W	10 W + 10 W
	Speaker System	2.0 ch	2.0 ch	2.0 ch	2.0 ch
Audio	Al Sound Pro / Al Sound	Yes	Yes	Yes	Yes
	Al Acoustic Tuning	Yes (Ready)	Yes (Ready)	Yes (Ready)	Yes (Ready)
	LG Sound Sync	Optical/Bluetooth wireless	Optical/Bluetooth wireless	Optical/Bluetooth wireless	Optical/Bluetooth wireless
Broadcasting	Digital (Terrestrial / Cable / Satellite)	ATSC, Clear QAM	ATSC, Clear QAM	ATSC, Clear QAM	ATSC, Clear QAM
System	Analog (NTSC / SECAM / PAL)	NTSC	NTSC	NTSC	NTSC
	Global IPTV Support	Yes	Yes	Yes	Yes
Hospitality	Solution Type	Pro:Centric (Smart, Cloud, Direct, V)	Pro:Centric (Smart, Cloud, Direct, V)	Pro:Centric (Smart, Cloud, Direct, V)	Pro:Centric (Smart, Cloud, Direct
	,,,	. , , , , ,	, , , , , ,	Trotechino (smart) cloda, birect, 1)	Tro.ecitate (Smart, cloud, Bireet,
Solution Smart Features	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAnnection Overlay, HDMI-ARC (HDMI 2),	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (H	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback,), IoT, EZ-Manager, USB Cloning, Wake o	Yes ompatibility (MR18HA), on RF, WOL,
Solution	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (Yes Ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In mote, Moving Picture Playback (SD/HD,	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagestant On, VLAN ID, RIP (Remote Jack Pac/Plus HD), Auto Off / Sleep Timer, Energe	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake o HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (if y Saving Mode, Motion Eye Care, b-LAN	Yes ompatibility (MR18HA), on RF, WOL, Multi-code IR 1) HDMI-CEC),
Solution Smart Features Hospitality	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAinection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (Mr Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In mote, Moving Picture Playback (SD/HD) Anti-theft System (Kensington Lo	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution Pl, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagestant On, VLAN ID, RIP (Remote Jack Pac	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake c HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (i y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")	Yes ompatibility (MR18HA), on RF, WOL, Multi-code IR 1) 1DMI-CEC), embedded
Solution Smart Features Hospitality	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Co Diagnostics (External S Mobile Re	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAnnection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 \(\Omega), Installer Moving Picture Playback (SD/HD, Anti-theft System (Kensington Lo	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution P), RS-232C), HTNG-CEC (1.4), Simplink (I Port Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Pac/Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea MM In (2.0), USB In (2.0), Antenna/Cable	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake e HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCM: Ck) Compatibility (Teleadapt/Guestlink (Ity Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Serven (Dual b-LAN), Optical Digital Audio O	Yes Ompatibility (MR18HA), On RF, WOL, Multi-code IR I) HDMI-CEC), embedded ice Only (3.5 mm TRS)
Solution Smart Features Hospitality Features Jack	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External s Mobile Re Set Side Set Rear	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nnection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (Mf Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In mote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Pac/Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Special In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service),	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback,), IoT, EZ-Manager, USB Cloning, Wake of HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (in y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Serv In (Dual b-LAN), Optical Digital Audio O LAN (RJ45), Aux LAN (RJ45), MPI Port (RJ	Yes Ompatibility (MR18HA), On RF, WOL, Multi-code IR 1) HDMI-CEC), embedded iice Only (3.5 mm TRS) ut, 12)
Solution Smart Features Hospitality Features Jack	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Con Diagnostics (External 1 Mobile Re Set Side Set Rear VESA Compatible	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nnection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (Mr Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In emote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HC TV- 300 × 300 mm	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution Pl, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Pac/Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Speach MI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake c HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (i y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Serv In (Dual b-LAN), Optical Digital Audio O LAN (RJ45), Aux LAN (RJ45), MPI Port (RJ 200 × 200 mm	Yes ompatibility (MR18HA), on RF, WOL, Multi-code IR 1) 10HDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm
Solution Smart Features Hospitality Features Jack	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Con Diagnostics (External 3 Mobile Re Set Side Set Rear VESA Compatible Stand Type	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nnection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In emote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HC 300 × 300 mm 1 pole (Fixed)	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution Pl, RS-232C), HTNG-CEC (1.4), Simplink (Bort Block, Welcome Screen (Splash Imagistant On, VLAN ID, RJP (Remote Jack Par Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRS), Spea DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), i 300 × 300 mm 1 pole (Swivel)	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake c HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (i y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Serv In (Dual b-LAN), Optical Digital Audio O LAN (RI45), Aux LAN (RI45), MPI Port (RI 200 × 200 mm 1 pole (Swivel)	Yes ompatibility (MR18HA), on RF, WOL, Multi-code IR 1) 1DMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel)
Solution Smart Features Hospitality Features Jack	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Con Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nnection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (Mr Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In emote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HE TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution Pl, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Pac/Pl) Stant On, VLAN ID, RJP (Remote Jack Pac/Pl) Ck, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Speace DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray	Yes P Server Compatibility, Magic Remote Coshare, DIAL, Bluetooth Audio Playback, Jo IoT, EZ-Manager, USB Cloning, Wake & HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCNck) Compatibility (Teleadapt/Guestlink (it yo Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Server In (Dual b-LAN), Optical Digital Audio OLAN (RJ45), Aux LAN (RJ45), MPI Port (RJ 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray	Yes Ompatibility (MR18HA), On RF, WOL, Multi-code IR 1) 1) 1DMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray
Solution Smart Features Hospitality Features Jack	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D)	Yes Ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAnnection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In the mote, Moving Picture Playback (SD/HD, Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HE TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 × 33 × 2.3 in. 1,454 × 838 × 57.7 mm	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (I Port Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Pac/Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Special In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), In 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 x 28.1 x 2.3 in. 1,235 × 715 × 57.5 mm	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake e HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCM-ck) Compatibility (Teleadapt/Guestlink (iy Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Serven (Dual b-LAN), Optical Digital Audio OLAN (RJ45), Aux LAN (RJ45), MPI Port (RJ 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 x 25.6 x 2.2 in. 1,121 × 651 × 57.1 mm	Yes Ompatibility (MR18HA), on RF, WOL, Multi-code IR I) HDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm
Solution Smart Features Hospitality Features Jack	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand	Yes Ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), In Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), In Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 V, 8 Q), In Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 V, 8 Q), In Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 V, 8 Q), In Installer Menu, Lock Mode (Limited), Pc Installer Menu, Speaker (Limited), Pc Installer Menu, Speaker (Limited) Box 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 x 33 x 2.3 in. 1,454 × 838 × 57.7 mm 57.2 x 35.8 x 13.4 in.	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Bort Block, Welcome Screen (Splash Imagistant On, VLAN ID, RJP (Remote Jack Par/Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Speace DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), In 1 pole (Swivel) Dark Charcoal Gray 48.6 x 28.1 x 2.3 in. 1,235 x 715 x 57.5 mm 48.6 x 30.6 x 11.9 in.	Yes P Server Compatibility, Magic Remote Coshare, DIAL, Bluetooth Audio Playback, JoT, EZ-Manager, USB Cloning, Wake & HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCNck) Compatibility (Teleadapt/Guestlink (it yo Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Server In (Dual b-LAN), Optical Digital Audio OLAN (RI45), Aux LAN (RI45), MPI Port (RI 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 × 25.6 × 2.2 in. 1,121 × 651 × 57.1 mm 44.1 × 28.1 × 11.9 in.	Yes Ompatibility (MR18HA), on RF, WOL, Multi-code IR I) HDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in.
Solution Smart Features Hospitality Features Jack	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions	Yes Ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAnnection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), Installer Moving Picture Playback (SD/HD, Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HDMI In x2 (2.0), USB HC TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 × 33 × 2.3 in. 1,454 × 838 × 57.7 mm 57.2 × 35.8 × 13.4 in. 1,454 × 909 × 340 mm 63 × 38.2 × 9 in.	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (I Port Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Pac (Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Special OMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 x 28.1 x 2.3 in. 1,235 × 715 × 57.5 mm 48.6 x 30.6 x 11.9 in. 1,235 × 777 × 303 mm 53.5 x 33.9 x 8.1 in.	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake e HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCM: Ck) Compatibility (Teleadapt/Guestlink (iy Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Servent (1) (Dual b-LAN), Optical Digital Audio O LAN (RJ45), Aux LAN (RJ45), MPI Port (RJ 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 x 25.6 x 2.2 in. 1,121 x 651 x 57.1 mm 44.1 x 28.1 x 11.9 in. 1,121 x 713 x 303 mm 51.9 x 31.9 x 7.4 in.	Yes Ompatibility (MR18HA), On RF, WOL, Multi-code IR I) HDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in.
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D)	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAnnection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), Installer Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HDMI In x2 (2.0), USB HL TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 × 33 × 2.3 in. 1,454 × 838 × 57.7 mm 57.2 × 35.8 × 13.4 in. 1,454 × 909 × 340 mm 63 × 38.2 × 9 in. 1,600 × 970 × 228 mm	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (I Port Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Pac (Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Special OMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), I 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 x 28.1 x 2.3 in. 1,235 × 715 × 57.5 mm 48.6 x 30.6 x 11.9 in. 1,235 × 777 × 303 mm 53.5 x 33.9 x 8.1 in. 1,360 × 860 × 207 mm	P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake on HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCM-ck) Compatibility (Teleadapt/Guestlink (if y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Servent (Dalay Chanage), Aux LAN (RJ45), MPI Port (RJ 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 x 25.6 x 2.2 in. 1,121 × 651 × 57.1 mm 44.1 x 28.1 x 11.9 in. 1,121 × 713 × 303 mm 51.9 x 31.9 x 7.4 in. 1,317 × 810 × 188 mm	Yes Ompatibility (MR18HA), On RF, WOL, Multi-code IR 1) HDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAnnection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In mote, Moving Picture Playback (SD/HD, Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HDMI In x2 (2.0), USB HC TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 × 33. × 2.3 in. 1,454 × 838 × 57.7 mm 57.2 × 35.8 × 13.4 in. 1,454 × 909 × 340 mm 63 × 38.2 × 9 in. 1,600 × 970 × 228 mm 47.4 lbs. / 21.5 kg	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (I Port Block, Welcome Screen (Splash Imagestant On, VLAN ID, RIP (Remote Jack Pac (Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Special OMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 777 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg	P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake e HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCCk) Compatibility (Teleadapt/Guestlink (Iy Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Serven (In (Dual b-LAN), Optical Digital Audio OLAN (RJ45), Aux LAN (RJ45), MPI Port (RJ200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 × 25.6 × 2.2 in. 1,121 × 651 × 57.1 mm 44.1 × 28.1 × 11.9 in. 1,121 × 713 × 303 mm 51.9 × 31.9 × 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg	Yes Ompatibility (MR18HA), On RF, WOL, Multi-code IR 1) HDMI-CEC), embedded 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In mote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HC TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 × 33 × 2.3 in. 1,454 × 838 × 57.7 mm 57.2 × 35.8 × 13.4 in. 1,454 × 909 × 340 mm 63 × 38.2 × 9 in. 1,600 × 970 × 228 mm 47.4 lbs. / 21.5 kg 50.5 lbs. / 22.9 kg	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution Pl, RS-232C), HTNG-CEC (1.4), Simplink (is ort Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Pac (Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spec DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 777 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback,), IoT, EZ-Manager, USB Cloning, Wake of HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCDck) Compatibility (Teleadapt/Guestlink (Iv Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Servent (In (Dual b-LAN), Optical Digital Audio OLAN (R145), Aux LAN (R145), MPI Port (R1200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 × 25.6 × 2.2 in. 1,121 × 651 × 57.1 mm 44.1 × 28.1 × 11.9 in. 1,121 × 713 × 303 mm 51.9 × 31.9 × 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg	Yes ompatibility (MR18HA), on RF, WOL, Multi-code IR 1) HDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In mote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HE TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 x 33 x 2.3 in. 1,454 × 838 × 57.7 mm 57.2 x 35.8 x 13.4 in. 1,454 × 899 × 340 mm 63 x 38.2 x 9 in. 1,600 × 970 × 228 mm 47.4 lbs. / 21.5 kg 50.5 lbs. / 22.9 kg	Yes /Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution Pl, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Pac/Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Specific (Splash Imagestant On, VLAN ID, RS-232C In (3.5 mm TRRS), Specific (Splash Imagestant On) John In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 777 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg 49.2 lbs. / 22.3 kg	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J., IoT, EZ-Manager, USB Cloning, Wake of HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN: L) Compatibility (Teleadapt/Guestlink (I) y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Servent (In (Dual b-LAN), Optical Digital Audio OLAN (RJ45), Aux LAN (RJ45), MPI Port (RJ 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 × 25.6 × 2.2 in. 1,121 × 651 × 57.1 mm 44.1 × 28.1 × 11.9 in. 1,121 × 713 × 303 mm 51.9 × 31.9 × 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg 41.0 lbs. / 18.6 kg	Yes Ompatibility (MR18HA), On RF, WOL, Multi-code IR 1) HDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B)	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In mote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HC TV-300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 × 33 × 2.3 in. 1,454 × 838 × 57.7 mm 57.2 × 35.8 × 13.4 in. 1,454 × 909 × 340 mm 63 × 38.2 × 9 in. 1,600 × 970 × 228 mm 47.4 lbs. / 21.5 kg 50.5 lbs. / 22.9 kg 63.7 lbs. / 28.9 kg 12.8 / 12.8 / 12.8 / 19.9 mm	Yes /Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution Pl, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Pac/Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Specific (Splash Images) John In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 777 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg 49.2 lbs. / 22.3 kg 12.8 / 12.8 / 12.8 / 19.9 mm	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J. IoT, EZ-Manager, USB Cloning, Wake of HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCNck) Compatibility (Teleadapt/Guestlink (it y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Server In (Dual b-LAN), Optical Digital Audio OLAN (RJ45), Aux LAN (RJ45), MPI Port (RJ 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 x 25.6 x 2.2 in. 1,212 × 651 × 57.1 mm 44.1 x 28.1 x 11.9 in. 1,212 × 713 × 303 mm 51.9 x 31.9 x 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg 41.0 lbs. / 18.6 kg 12.8 / 12.8 / 12.8 / 19.9 mm	Yes Ompatibility (MR18HA), On RF, WOL, Multi-code IR I) HDMI-CEC), embedded Ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 12.8 / 19.9 mm
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight without Stand Weight without Stand Weight without Stand Shipping Weight On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B)	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, & 0), In emote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HDMI In x2 (2.0), USB HE TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 × 33 × 2.3 in. 1,454 × 838 × 57.7 mm 57.2 × 35.8 × 13.4 in. 1,454 × 909 × 340 mm 63 × 38.2 × 9 in. 1,600 × 970 × 228 mm 47.4 lbs. / 21.5 kg 50.5 lbs. / 22.9 kg 63.7 lbs. / 22.9 kg 63.7 lbs. / 28.9 kg 12.8 / 12.8 / 12.8 / 19.9 mm 6.8 / 6.8 / 6.8 / 6.8 / 18.4 mm	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution Pl, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagestant On, VLAN ID, RJP (Remote Jack Par Plant HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Special Control (Splash Imagest) In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 x 28.1 x 2.3 in. 1,235 × 715 × 57.5 mm 48.6 x 30.6 x 11.9 in. 1,235 × 777 × 303 mm 53.5 x 33.9 x 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg 49.2 lbs. / 22.3 kg 12.8 / 12.8 / 19.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J. IoT, EZ-Manager, USB Cloning, Wake & HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (it y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Servent (In (Dual b-LAN), Optical Digital Audio O LAN (RJ45), Aux LAN (RJ45), MPI Port (RJ 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 x 25.6 x 2.2 in. 1,121 × 651 × 57.1 mm 44.1 x 28.1 x 11.9 in. 1,121 × 713 × 303 mm 51.9 × 74 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg 41.0 lbs. / 18.6 kg 12.8 / 12.8 / 12.8 / 19.9 mm 7.3 / 7.3 / 7.8 / 18.4 mm	Yes Ompatibility (MR18HA), On RF, WOL, Multi-code IR 1) HDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 12.8 / 19.9 mm 6.9 / 6.9 / 6.9 / 6.9 / 18.4 mm
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In emote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HDMI In x2 (2.0), USB HC TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 × 33.3 × 2.3 in. 1,454 × 838 × 57.7 mm 57.2 × 33.8 × 13.4 in. 1,454 × 999 × 340 mm 63 × 38.2 × 9 in. 1,600 × 970 × 228 mm 47.4 lbs. / 21.5 kg 50.5 lbs. / 22.9 kg 63.7 lbs. / 28.9 kg 12.8 / 12.8 / 19.9 mm 6.8 / 6.8 / 6.8 / 18.4 mm 100-240 Vac, 50/60 Hz	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution Pl, RS-232C), HTNG-CEC (1.4), Simplink (Bort Block, Welcome Screen (Splash Imagistant On, VLAN ID, RJP (Remote Jack Par Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), In 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 777 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg 49.2 lbs. / 22.3 kg 12.8 / 12.8 / 19.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J., IoT, EZ-Manager, USB Cloning, Wake & HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN-ck) Compatibility (Teleadapt/Guestlink (it yo Saving Mode, Motion Eye Care, b-LAN-65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Servent (1.5 m	Yes ompatibility (MR18HA), on RF, WOL, Multi-code IR 1) dDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 12.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Dimensions with Stand (W x H x D) Weight without Stand Weight without Stand Weight without Stand Weight without Stand Weight with Off Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Supply (Voltage, Hz) Power Consumption (Typ. / Max.)	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In emote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HDMI In x2 (2.0), USB HC TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 × 33 × 2.3 in. 1,454 × 838 × 57.7 mm 57.2 × 35.8 × 13.4 in. 1,454 × 999 × 340 mm 63 × 38.2 × 9 in. 1,600 × 970 × 228 mm 47.4 lbs. / 21.5 kg 50.5 lbs. / 22.9 kg 63.7 lbs. / 22.9 kg 63.7 lbs. / 28.9 kg 12.8 / 12.8 / 12.8 / 19.9 mm 6.8 / 6.8 / 6.8 / 18.4 mm 100-240 Vac, 50/60 Hz 144 W / 180 W	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagistant On, VLAN ID, RIP (Remote Jack Par Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), In 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 30.6 × 11.9 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 717 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg 49.2 lbs. / 22.3 kg 12.8 / 12.8 / 12.8 / 19.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz 135 W / 163 W	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J., IoT, EZ-Manager, USB Cloning, Wake & HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN k) Compatibility (Teleadapt/Guestlink (it y saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Serven (1.5), Aux LAN (RJ45), MPI Port (RJ200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.11 × 28.1 × 11.9 in. 1,121 × 651 × 57.1 mm 44.12 × 28.1 × 11.9 in. 1,121 × 713 × 303 mm 51.9 × 31.9 × 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg 41.0 lbs. / 18.6 kg 12.8 / 12.8 / 12.8 / 19.9 mm 7.3 / 7.3 / 7.8 / 18.4 mm 100-240 Vac, 50/60 Hz 112 W / 135 W	Yes ompatibility (MR18HA), on RF, WOL, Multi-code IR 1) 1) 10HDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 12.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz 82 W / 119 W
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Weight without Stand Weight without Stand Power Supply (Voltage, Hz) Power Consumption (Typ. / Max.) Standby Power Consumption	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8.0), In emote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HDMI In x2 (2.0), USB 1 pole (Fixed) Dark Charcoal Gray 57.2 x 33 x 2.3 in. 1,454 x 838 x 57.7 mm 57.2 x 35.8 x 13.4 in. 1,454 x 999 x 340 mm 63 x 38.2 x 9 in. 1,600 x 970 x 228 mm 47.4 lbs. / 21.5 kg 50.5 lbs. / 22.9 kg 63.7 lbs. / 28.9 kg 12.8 / 12.8 / 12.8 / 19.9 mm 6.8 / 6.8 / 6.8 / 18.4 mm 100-240 Vac, 50/60 Hz 144 W / 180 W Under 0.5 W	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution P), RS-232C), HTNG-CEC (1.4), Simplink (I Port Block, Welcome Screen (Splash Imagistant On, VLAN ID, RIP (Remote Jack Par P(Plus HD), Auto Off / Sleep Timer, Energi ck, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), I 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 717 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg 49.2 lbs. / 22.3 kg 12.8 / 12.8 / 12.8 / 19.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz 135 W / 163 W Under 0.5 W	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J. IoT, EZ-Manager, USB Cloning, Wake & HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN k) Compatibility (Teleadapt/Guestlink (It y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Serven In (Dual b-LAN), Optical Digital Audio O LAN (RI45), Aux LAN (RI45), MPI Port (RI 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.11 × 25.6 × 2.2 in. 1,121 × 651 × 57.1 mm 44.11 × 28.1 × 11.9 in. 1,121 × 71.3 × 30.3 mm 51.9 × 31.9 × 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg 41.0 lbs. / 18.6 kg 12.8 / 12.8 / 12.8 / 19.9 mm 7.3 / 7.3 / 7.8 / 18.4 mm 100-240 Vac, 50/60 Hz 112 W / 135 W Under 0.5 W	Yes ompatibility (MR18HA), on RF, WOL, Multi-code IR 1) 1) 1) 1) 1) 1) 1) 1) 1) 1
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Weight without Stand Weight without Stand Weight without Stand Weight without Stand Weight with Stand Shipping Dimensions (W x H x D) Off Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Supply (Voltage, Hz) Power Consumption (Typ. / Max.) Standby Power Consumption Warranty	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAnnection Overlay, HDMI-ARC (HDMI 2), [IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), In mote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HE TV- 300 × 300 mm 1 pole (Fixed) Dark Charcoal Gray 57.2 × 33. × 2.3 in. 1,454 × 898 × 57.7 mm 57.2 × 35.8 × 13.4 in. 1,454 × 909 × 340 mm 63 × 38.2 × 9 in. 1,600 × 970 × 228 mm 47.4 lbs. / 21.5 kg 50.5 lbs. / 22.9 kg 63.7 lbs. / 28.9 kg 12.8 / 12.8 / 19.9 mm 6.8 / 6.8 / 6.8 / 18.4 mm 100-240 Vac, 50/60 Hz 144 W / 180 W Under 0.5 W 2 Year Limited	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution P, RS-232C), HTNG-CEC (1.4), Simplink (I Port Block, Welcome Screen (Splash Imagestant On, VLAN ID, RIP (Remote Jack Pace) Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Special (1.20), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 777 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg 49.2 lbs. / 22.3 kg 12.8 / 12.8 / 12.8 / 19.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz 135 W / 163 W Under 0.5 W 2 Year Limited	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J. (17, EZ-Manager, USB Cloning, Wake of HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCDck) Compatibility (Teleadapt/Guestlink (Iv Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Servent (In (Dual b-LAN), Optical Digital Audio OLAN (R145), Aux LAN (R145), MPI Port (R1200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 × 25.6 × 2.2 in. 1,121 × 651 × 57.1 mm 44.1 × 28.1 × 11.9 in. 1,121 × 713 × 303 mm 51.9 × 31.9 × 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg 41.0 lbs. / 18.6 kg 12.8 / 12.8 / 12.8 / 19.9 mm 7.3 / 7.3 / 7.8 / 18.4 mm 100-240 Vac, 50/60 Hz 112 W / 135 W Under 0.5 W 2 Year Limited	Yes ompatibility (MR18HA), on RF, WOL, Multi-code IR 1) HDMI-CEC), embedded ice Only (3.5 mm TRS) ut, 12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 664 × 203 mm 42.3 × 264 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. /8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. /15.4 kg 12.8 / 12.8 / 12.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz 82 W / 119 W Under 0.5 W 2 Year Limited
Solution Smart Features Hospitality Features Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite) webOS23 User Interfa Mobile Cor Diagnostics (External S Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Weight without Stand Weight without Stand Power Supply (Voltage, Hz) Power Consumption (Typ. / Max.) Standby Power Consumption	Yes ce, Smart Home (Launcher Bar), Gallery SW Clock (World Clock / Alarm), SoftAl nection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (MF Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8.0), In emote, Moving Picture Playback (SD/HD), Anti-theft System (Kensington Lo HDMI In x2 (2.0), USB HDMI In x2 (2.0), USB 1 pole (Fixed) Dark Charcoal Gray 57.2 x 33 x 2.3 in. 1,454 x 838 x 57.7 mm 57.2 x 35.8 x 13.4 in. 1,454 x 999 x 340 mm 63 x 38.2 x 9 in. 1,600 x 970 x 228 mm 47.4 lbs. / 21.5 kg 50.5 lbs. / 22.9 kg 63.7 lbs. / 28.9 kg 12.8 / 12.8 / 12.8 / 19.9 mm 6.8 / 6.8 / 6.8 / 18.4 mm 100-240 Vac, 50/60 Hz 144 W / 180 W Under 0.5 W	Yes Mode, Quick Access, Web Browser, SDI P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution P), RS-232C), HTNG-CEC (1.4), Simplink (I Port Block, Welcome Screen (Splash Imagistant On, VLAN ID, RIP (Remote Jack Par P(Plus HD), Auto Off / Sleep Timer, Energi ck, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), I 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 717 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg 49.2 lbs. / 22.3 kg 12.8 / 12.8 / 12.8 / 19.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz 135 W / 163 W Under 0.5 W	Yes P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J. IoT, EZ-Manager, USB Cloning, Wake & HDMI-CEC) (1.4), IR Out (MPI, RS-232C), e), Insert Image, One Channel Map (LCN k) Compatibility (Teleadapt/Guestlink (It y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65") aker Out/Line Out (3.5 mm Stereo), Serven In (Dual b-LAN), Optical Digital Audio O LAN (RI45), Aux LAN (RI45), MPI Port (RI 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.11 × 25.6 × 2.2 in. 1,121 × 651 × 57.1 mm 44.11 × 28.1 × 11.9 in. 1,121 × 71.3 × 30.3 mm 51.9 × 31.9 × 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg 41.0 lbs. / 18.6 kg 12.8 / 12.8 / 12.8 / 19.9 mm 7.3 / 7.3 / 7.8 / 18.4 mm 100-240 Vac, 50/60 Hz 112 W / 135 W Under 0.5 W	Yes ompatibility (MR18HA), on RF, WOL, Multi-code IR 1) 1) 1) 1) 1) 1) 1) 1) 1) 1

^{*} Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.



