



\* All images in this datasheet are for illustrative purposes only.

**Commercial TV UN560H Series**

Commercial Lite    Pro:Centric Value    **Pro:Centric Direct**    Pro:Centric Direct Smart

# Pro:Centric<sup>®</sup> Direct Hospitality Ultra HD TV




**UN560H Series**

|              |                                   |                        |
|--------------|-----------------------------------|------------------------|
| Design       | Stand Type                        | 1 pole (Swivel)        |
| Display      | Diagonal                          | 55" / 50" / 43"        |
|              | Resolution                        | 3,840 × 2,160 (4K UHD) |
| Broadcasting | Digital                           | ATSC, Clear QAM        |
|              | Analog                            | NTSC                   |
| Solution     | Pro:Centric (Direct 5.5, PCA 3.8) |                        |
| VESA         | 55":                              | 300 × 300              |
|              | 50" / 43":                        | 200 × 200              |



## 4K UHD, Vibrant Viewing in Ultra High Resolution

LG UHD TVs surpass your expectations every time. Experience lifelike picture quality and vivid colors with four times more pixel resolution than Full HD.

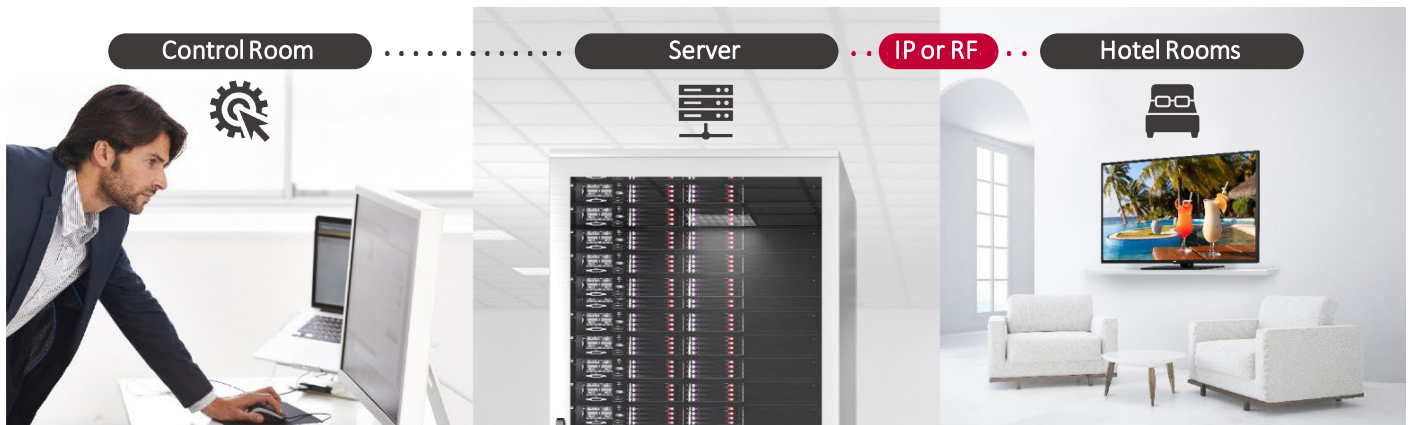

## Pro:Centric Direct


The hotel content management solution Pro:Centric Direct offers easy and simple editing tools, making it easy to perform service and IP network-based remote management.\* The Pro:Centric Direct solution enables users to edit their interface easily by providing customized interface and efficiently manages all TVs in the room. The latest PCD version provides IoT-based in-room control. The IoT function will be your starting point to prepare for the hotel rooms of next generation through artificial intelligence.

\* Specific feature set based on PCD version.



## Pro:Idiom

Digital Rights Management (DRM) technology provides access to premium content to help assure rapid and broad deployment of HDTV and other high-value digital content.

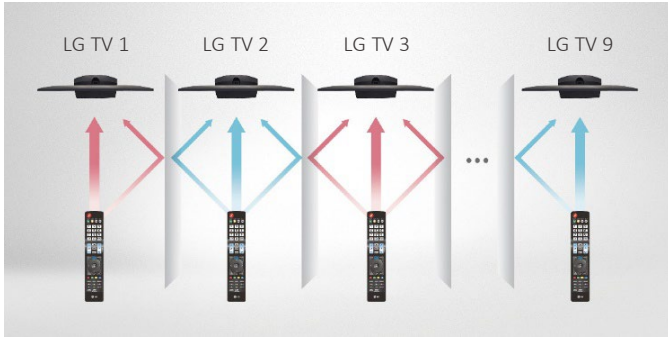

### Multi-code IR

Multi-code IR\* function eliminates any remote-control signal interaction between multiple TVs in one place. LG hospital TV supports this when used with the Multi-code IR remote control, so users can freely control their own TVs without disturbing the others.

\* Multi-code IR remote control is not provided by LG. (sold separately)




### Ez-Manager

Ez-Manager provides a convenient installation function automatically set up for Pro:Centric TV that provides less effort and process than manual installation.

## CONNECTIVITY

55" / 50" / 43"

Rear

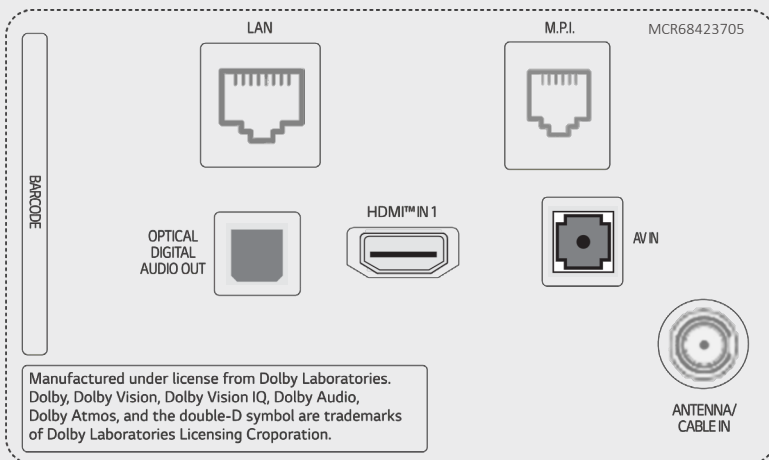

Side



## SPECIFICATIONS

|                                 |   | 55UN560H0UA   | 50UN560H0UA                                    | 43UN560H0UA                                   |
|---------------------------------|---|---|--|---|
| Category                        | Category  | Pro:Centric Enhanced  | Pro:Centric Enhanced                           | Pro:Centric Enhanced                          |
| Design                          | Stand Type  | 1 pole (Swivel)   | 1 pole (Swivel)                                | 1 pole (Swivel)                               |
|                                 | Front Color   | Dark Ash Charcoal   | Dark Ash Charcoal                              | Dark Ash Charcoal                             |
| Display                         | Diagonal  | 55"   | 50"  | 43"   |
|                                 | Resolution  | 3,840 × 2,160 (UHD)   | 3,840 × 2,160 (UHD)                            | 3,840 × 2,160 (UHD)                           |
| Video                           | HDR 10 Pro / HDR HLG  | Yes / Yes   | Yes / Yes                                      | Yes / Yes                                     |
|                                 | Game Optimizer  | Yes   | Yes  | Yes   |
| Audio                           | Speaker (Sound Output)  | 10 W + 10 W   | 10 W + 10 W                                    | 10 W + 10 W                                   |
|                                 | Speaker System  | 2.0 ch  | 2.0 ch   | 2.0 ch  |
| Broadcasting                    | Analog  | NTSC  | NTSC   | NTSC  |
|                                 | Digital (Terrestrial / Cable / Satellite)   | ATSC, Clear QAM   | ATSC, Clear QAM                                | ATSC, Clear QAM                               |
| Hospitality Solution            | Solution Type   | Pro:Centric (Direct 5.5, PCA 3.8)   | Pro:Centric (Direct 5.5, PCA 3.8)              | Pro:Centric (Direct 5.5, PCA 3.8)             |
|                                 | Pro:Idiom (Mobile, Lite)  | Yes   | Yes  | Yes   |
| Smart Features                  | Smart Home (Launcher Bar), Quick Access, HDMI-ARC (HDMI 2), Wake on RF, Diagnostics (RF Remote), Simplink (HDMI-CEC) (1.4), Anti-theft System (Kensington Lock, Credenza/Security Aperture (Except 65")), Lock Down Plate (for Easy Installing) (Except 65")) |   |  |   |
| Hospitality Features            | Port Block, Insert Image, Instant ON, Auto Off / Sleep Timer, Energy Saving Mode  |   |  |   |
| Connectivity                    | Set Side  | HDMI 2.0 In (x2), USB 2.0 In, Service Only (3.5mm Stereo), RS-232C In (3.5 mm TRRS), Speaker/Line Out (3.5 mm Stereo) |  |   |
|                                 | Set Rear / Bottom   | HDMI 2.0 In, RF Antenna/Cable In, AV In (3.5 mm), Digital Audio Out (Optical), RJ45 (LAN), M.P.I.                     |  |   |
| Mechanical                      | VESA Compatible   | 300 × 300 mm  | 200 × 200 mm                                   | 200 × 200 mm                                  |
|                                 | Dimensions (W × H × D)  | 48.6 × 28.1 × 2.3 in.<br>1,235 × 715 × 57.5 mm  | 44.1 × 25.6 × 2.2 in.<br>1,121 × 651 × 57.1 mm | 38.1 × 22.2 × 2.2 in.<br>967 × 564 × 57.1 mm  |
|                                 | Weight  | 30.9 lbs. / 14.0 kg   | 26.7 lbs. / 12.1 kg                            | 19.4 lbs. / 8.8 kg                            |
|                                 | Dimensions with Stand (W × H × D)   | 48.6 × 30.6 × 11.9 in.<br>1,235 × 777 × 303 mm  | 44.1 × 28.1 × 11.9 in.<br>1,121 × 713 × 303 mm | 38.1 × 24.5 × 11.9 in.<br>967 × 623 × 303 mm  |
|                                 | Weight with Stand   | 37.9 lbs. / 17.2 kg   | 33.7 lbs. / 15.3 kg                            | 26.5 lbs. / 12.0 kg                           |
|                                 | Shipping Dimensions (W × H × D)   | 53.5 × 33.9 × 8.1 in.<br>1,360 × 860 × 207 mm   | 51.9 × 31.9 × 7.4 in.<br>1,317 × 810 × 188 mm  | 42.3 × 26.0 × 8.0 in.<br>1,075 × 660 × 203 mm |
|                                 | Shipping Weight   | 49.2 lbs. / 22.3 kg   | 41 lbs. / 18.6 kg                              | 34.0 lbs. / 15.4 kg                           |
|                                 | On Bezel Width (L / R / U / B)  | 12.8 / 12.8 / 12.8 / 19.9 mm  | 12.8 / 12.8 / 12.8 / 19.9 mm                   | 12.8 / 12.8 / 12.8 / 19.9 mm                  |
| Off Bezel Width (L / R / U / B) | 6.9 / 6.9 / 6.9 / 18.4 mm   | 7.3 / 7.3 / 7.8 / 18.4 mm   | 6.9 / 6.9 / 6.9 / 18.4 mm                      |   |
| Power                           | Power Consumption (Typ. / Max.)   | 140 W / 170 W   | 120 W / 145 W                                  | 100 W / 120 W                                 |
|                                 | Power Supply (Voltage, Hz)  | 100-240 Vac, 50/60 Hz   | 100-240 Vac, 50/60 Hz                          | 100-240 Vac, 50/60 Hz                         |
| Warranty & Other                | Warranty  | 2 Year Limited  | 2 Year Limited                                 | 2 Year Limited                                |
|                                 | Certification   | FCC   | FCC  | FCC   |
|                                 | UPC   | 1 95174 058107  | 1 95174 05775 9                                | 1 95174 05811 4                               |

\* Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.