



\* All images in this datasheet are for illustrative purposes only.



**Video Wall** VM5J-H

# Artistic Immersion, Overwhelming Captivation



Extreme-Narrow Bezel



Wider Viewing Angle




Easy Color Adjustment



Efficient Operation

VM5J-H


Screen Size	55"
Aspect Ratio	16 : 9
Native Resolution	FHD (1,920 × 1,080)
Brightness	500 nit (Typ.)
Contrast Ratio	1,000 : 1

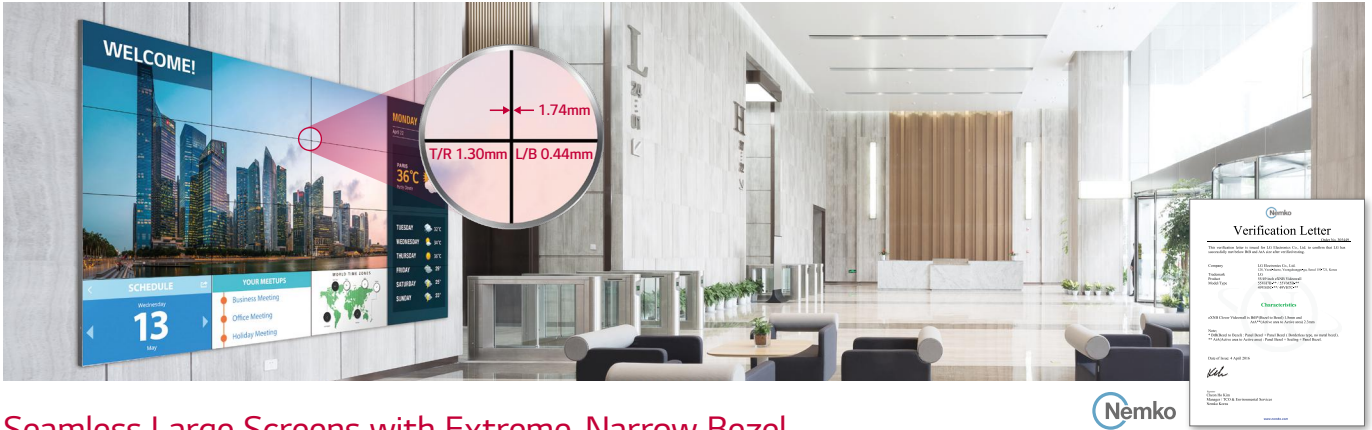

## Seamless Large Screens with Extreme-Narrow Bezel

The ultra slim bezel, with its 1.74mm BtoB (Panel Bezel to Panel Bezel), drastically reduces bezel interference and delivers immersive and seamless content on assembled video wall screens.

\* The 1.74mm BtoB (Panel Bezel to Panel Bezel) have been verified by Nemko, a global institution that tests and certifies electrical equipment.

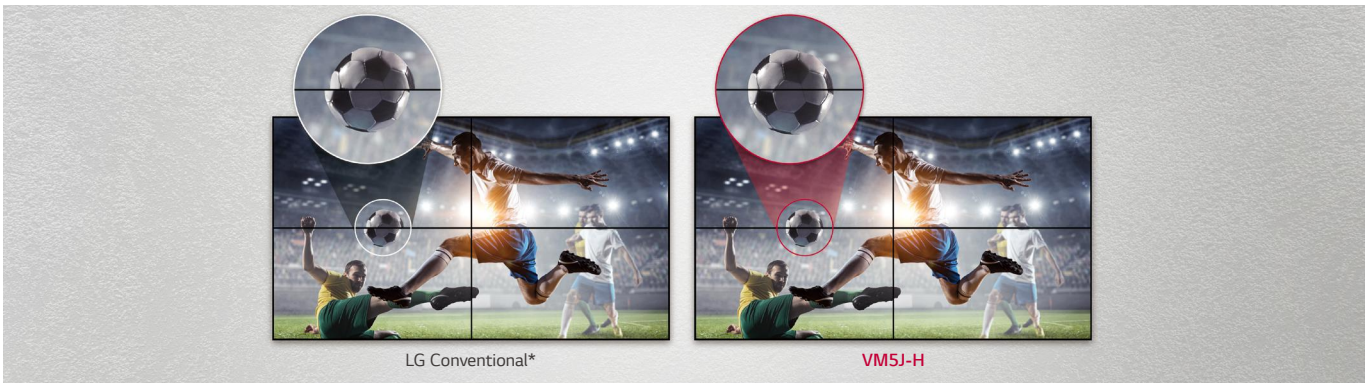

## Image Gap Reduction

The VM5J-H includes an image improvement algorithm that can reduce image gaps among tiled displays when playing back videos. Objects located on the bezel boundaries are adjusted for a seamless viewing experience.

\* The "LG Conventional" refers to displays which do not include an image improvement algorithm.

\*\* The image shown above are for illustration purposes only.



40°\* High Viewing Angle

## Higher Viewing Angle


Large screens are usually positioned higher than human-eye level. Wide half luminance angle (40°) enables effective picture quality for video walls. The viewing angle of the VM5J-H is high enough to display vivid colors throughout the screen without any color distortion.

\* Results based on in-house testing. Actual test results may differ depending on environment and measuring equipment.



## Wider Viewing Angle

LG IPS panel technology enables stable and smooth control of liquid crystals, and allows the screen to be viewed from virtually any angle. Therefore, the VM5J-H captivates the attention of more viewers with lifelike colors, regardless of their viewing position.

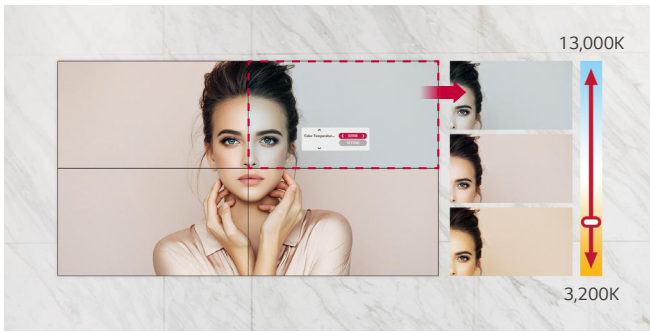

### Easy Color Adjustment

Depending on the content, the color temperature of the display can be easily adjusted in increments of 100K using a remote control.



### Simple White Balance Adjustment


In conventional video walls, white balance was adjustable only in "full-white" mode, but the VM5J-H allows you to modify each value of grey scale to achieve more detailed and precise white balance adjustment.



### High Performance and Great Scalability

Thanks to its built-in SoC and webOS smart signage platform, the VM5J-H can execute several tasks at once while providing smooth content playback without the need for a media player. As webOS supports HTML5 as a web-based platform and offers SDK (Software Development Kit), it is even easier for SIs to build and optimize their web apps.


\* SDK can be downloaded with the link below.  
(<https://webossignage.developer.lge.com>)

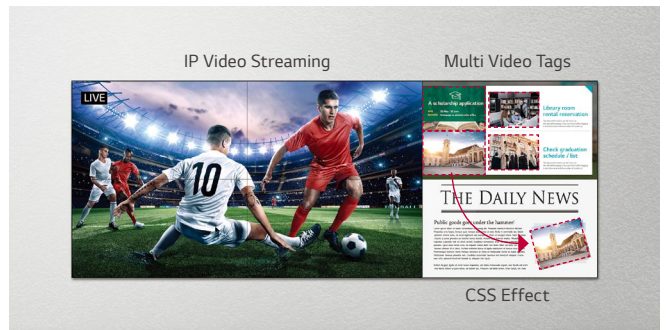

### Flexible Content Creation


Four different videos can be played simultaneously via web apps, and various animation effects, such as scaling or rotating, are added to content using CSS (Cascading Style Sheets) transition effects. Real-time streaming is also available, providing the flexibility to organize and diversify content free from capacity limits.

\* Supported protocols : RTSP, RTP, HLS, UDP Multicast

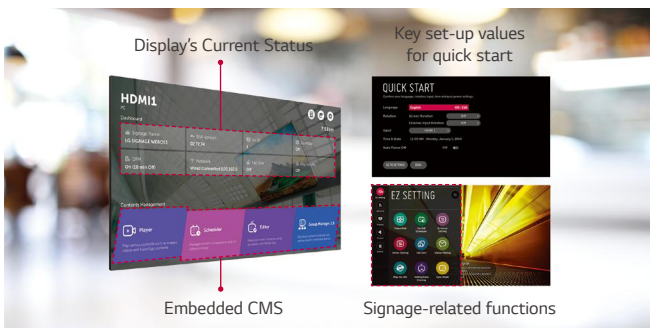

### Intuitive Menu Structure

The menu structure has been optimized for commercial use. It simplifies approach flows and groups similar functions together, adopting a more intuitive GUI for ease of use. This way, users can avoid having to do trial-and-error when exploring desired functions and managing displays.

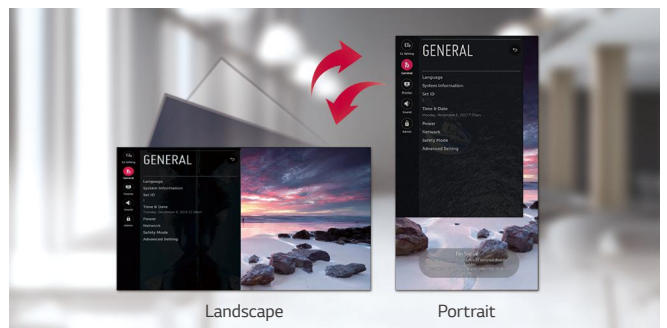

### Dedicated GUI for Portrait Orientation

The conventional GUI (Graphic User Interface) was designed based on landscape-oriented consumer TV usage, so OSD (On Screen Display) wasn't well-suited for screens in portrait mode. The OSD of the VM5J-H, however, consists of a long range menu with bigger font sizes and a 9:16 ratio, creating a comfortable and efficient business environment.



### Conformal Coating

Video wall in various places can't avoid exposure to environments with dust, and humidity, which may lead to hampered performance over time. Conformal coating on the major circuit board (power board) significantly reduces these risks from such environments by protecting video wall from salt, dust, iron powder, humidity, etc.

\* Actual images (Signage display) available may differ from the example images shown.



### EMC Class B Certified


The VM5J-H is certified as EMC Class B, which requires electronic equipment made for use in residential environments as well as commercial, industrial, or business environments. Therefore, it is suitable for up-close uses such as corporate meeting rooms, board rooms, etc.



### Real-Time LG ConnectedCare


Maintenance is easy and fast with the optional LG ConnectedCare\* service, a cloud service solution provided by LG. It remotely manages the status of displays in client workplaces for fault diagnosis and remote-control services, enabling the stable operation of clients' businesses.

\* LG ConnectedCare is the brand name of LG Signage365Care Service. The availability differs by region.

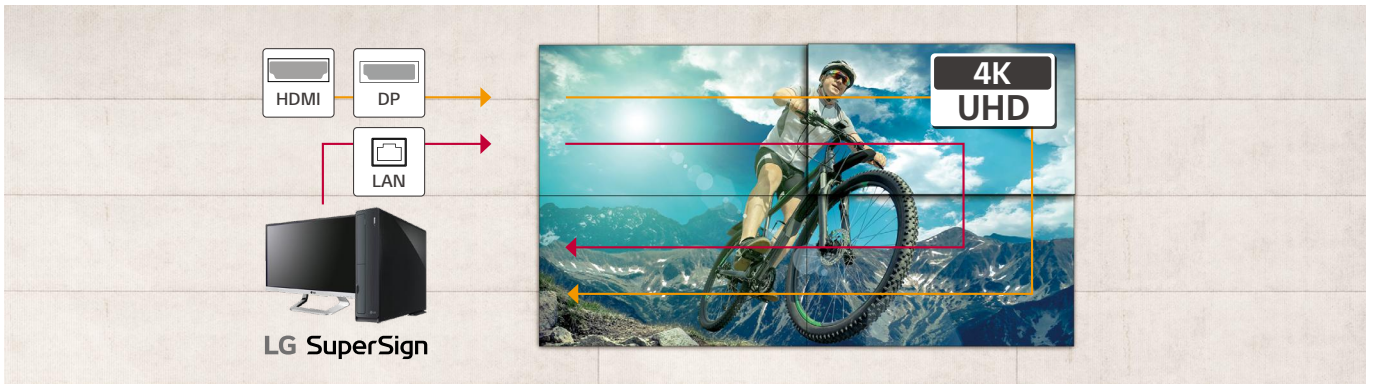

### Daisy Chain Capability


A LAN daisy chain allows you to control and monitor video walls and even update their firmwares at once. Also, through UHD daisy chain using HDMI and DisplayPort, you can easily set up a UHD video wall without the need of DisplayPort MST.

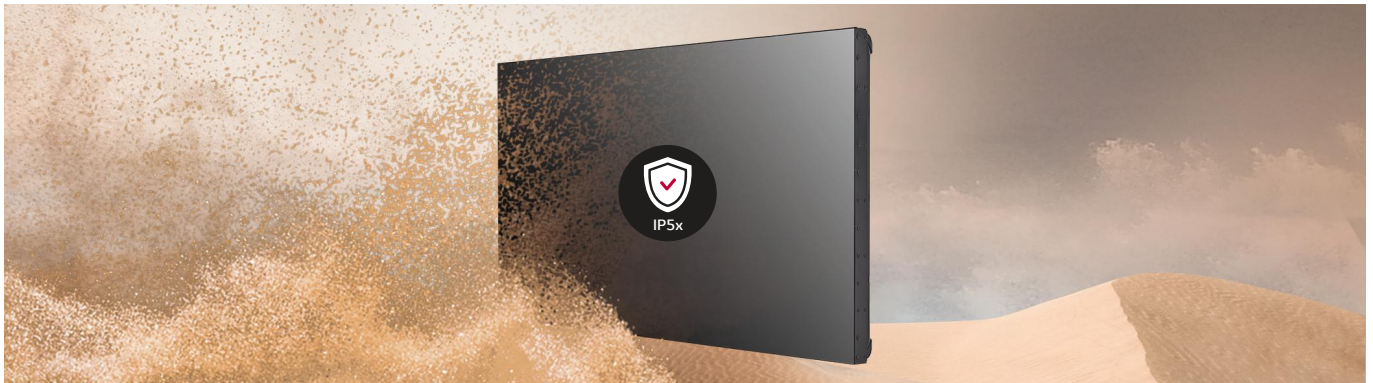

### IP5x Certified Design

The IP5x Dust-Proof Certification ensures that the product is protected from dust, eliminating the risk of performance degradation.

### CONNECTIVITY

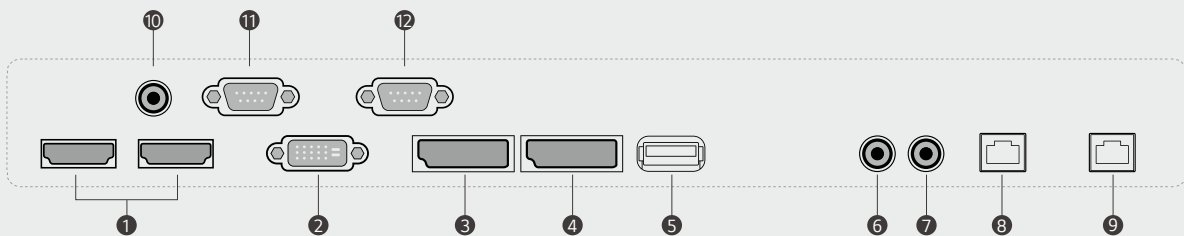

- 1 HDMI IN
- 2 DVI-D IN
- 3 DP IN
- 4 DP OUT
- 5 USB 2.0 IN
- 6 AUDIO IN
- 7 AUDIO OUT
- 8 LAN IN
- 9 LAN OUT
- 10 IR IN
- 11 RS-232C IN
- 12 RS-232C OUT

\* Jack Panels may differ from the above image, so please contact LG sales team to verify before ordering.

