


Customer Service: 866.469.7111

www.knitec.com

Contact your LG Regional Sales Representative

Channel: 866.469.7111 Hospitality: 866.469.7111 Email: sales@knitec.com

LG PACKAGED TERMINAL AIR CONDITIONERS

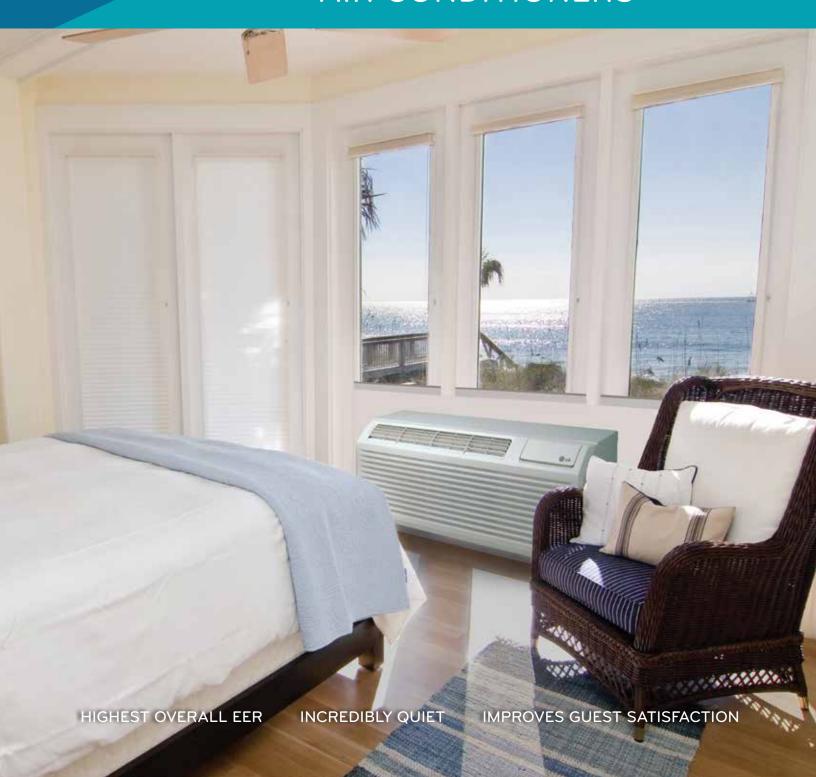

LG PACKAGED TERMINAL AIR CONDITIONERS

When guests are provided with a truly quiet, comfortable room, lodging facilities are rewarded with increased guest satisfaction. The best way to assure that is with LG's new line of energy efficient and quiet PTAC products. They provide an extremely low decibel level and an outstanding sound rating with a soothing tone. Plus, LG models have an efficiency rating up to 13.3 EER, which translates into energy savings.



PTAC FEATURES & BENEFITS



Thermostats

Accessory Part# PYRCUCC1HB (wireless)
Accessory Part# PYRCUCA0B (wired)

- · Wired or Wireless PTAC Thermostat
- Affordable Comfort Control
- · High and Low Speed Fan
- · Heating and Cooling Set-point Limits
- · Battery or 24v Power (Wireless)
- $\bullet \ \mathsf{Room} \ \mathsf{Temperature} \ \mathsf{Calibration} \ \mathsf{Adjustment}$
- 5 Year Warranty
- \cdot Large Temperature and Set-point Display
- · Large Blue Backlight Screen



Digital Control Display

- Temperature Display on Unit Precise and easy-to-use. ADA compliant.
- Cooling, Heating and Fan Modes One unit for all seasons.
- Energy Saver Mode
 Helps to lower energy consumption operational costs and saves money.
- Auto Restart
 Automatically restarts to programmed setting when the electricity comes on after a power failure.




Ceramic Heater

Even, stable and safe heating platform. (Available on 230/208V models)



Gold Fin™ Anti-Corrosive Treatment

Protects the unit from the corrosive effects of outside air and extends the operating life of PTAC models. LG's patented process is standard on LG PTAC models.

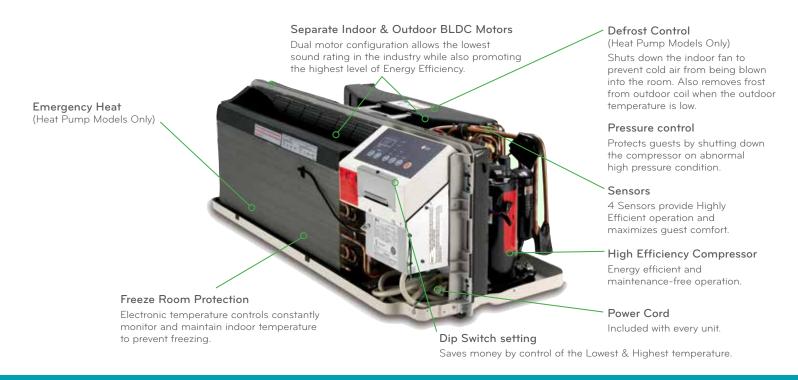

PARTS & ACCESSORIES



42" Wall Sleeve AYSVB01A




Architecture Grille - Dark Bronze AYAGALB01A



Hardwire Kit AYHW101



Architecture Grille - Soft Dove (soft beige) AYAGALC01A



Condensate Drain Kit AYDR101A



Digital Wired Wall Thermostat PYRCUCAOB For technical support & quality issue, please call 888-776-1427



Leveling Legs (set of 2) AYLL101A



Architecture Grille - Aluminum AYAGALA01A



Digital Wireless Wall Thermostat PYRCUCC1HB For technical support & quality issue, please call 888-776-1427



Replacement Filters 10-Pack AYFT110



Lateral Duct Kit AYLD1A



Sub Base (230/ 208V 30A) AYSB2101A

Sub Base (265V 20A) AYSB3101A Wired Wall Thermostat Connection Kit AYWH110

Remote Escutcheon Kit 10-Pack AYRE110

LG PACKAGED TERMINAL AIR CONDITIONERS

FEATURES:

- Energy Saver Mode
- Auto Restart
- Digital Control Display
- Dip Switch Setting for Temperature High Energy Efficiency
- Freeze Room Protection
- Front Desk Control
- GoldFin [™] Anti-corrosion Treatment for Condensor Coil
- Temperature Display on Unit
- Ultra-Quiet Operation
- Dimension W x H x D (inch) 42 X 16 X 21
- LG Brand Compressors • LG Brand BLDC Motors
- Power Cord with Plug (230/ 208V Models)
- Ceramic Heaters (230/208V Models)
- Compatible with Most Energy Management Systems
- Made by LG in LG Factories.

1-year full system limited warranty, parts and labor. Limited warranty on unit for years 2-5: parts only, exclusive of the refrigeration system. Limited warranty on sealed refrigeration system: 5 years, parts and labor.

PACKAGED TERMINAL AIR CONDITIONER (PTAC) 208 - 230V HEATING & COOLING MODELS

Model	Cooling Capacity (Btu/h)	EER	Heating Capacity (Btu/h)	COP	Net Weight (lbs)	Shipping Weight (lbs)	Sound Pressure IDU/ODU (dBA)	Air Circulation H/L (CFM)	Dehumidification (pts/hr)	Power Supply (V/Hz/Ph)	Electric Heater (kW)	MOP (A)	MCA (A)	Cooling Rated Amps (A)	Heating Rated Amps (A)	Cooling Power Input (W)	Heating Power Input (W)
LP073CD2B	7,100/7,300	13.3			95	109	45/61	270/225	1.7	208-230/60/1	2.4/2.5	15	14.9	2.7/2.5		535/550	
LP093CD3B	9,300/9,500	12.7			95	109	46/61	270/225	2.6	208-230/60/1	3.1/3.5	20	19.5	3.7/3.4		730/745	
LP123CD3B	12,000/12,200	11.9			99	113	50/63	420/353	3.0	208-230/60/1	3.1/3.5	20	19.5	5.1/4.7		1,005/1,025	
LP153CD3B	14,900/15,100	11.2			115	129	51/64	420/353	4.3	208-230/60/1	3.1/3.5	20	19.5	6.6/6.1		1,330/1,345	

PACKAGED TERMINAL AIR CONDITIONER (PTAC) 208 - 230V HEAT PUMP MODELS

Model	Cooling Capacity (Btu/h)	EER	Heating Capacity (Btu/h)	COP	Net Weight (lbs)	Shipping Weight (lbs)	Sound Pressure IDU/ODU (dBA)	Air Circulation H/L (CFM)	Dehumidification (pts/hr)	Power Supply (V/Hz/Ph)	Electric Heater (kW)	MOP (A)	MCA (A)	Cooling Rated Amps (A)	Rated	Cooling Power Input (W)	Heating Power Input (W)
LP073HD2B	7,100/7,300	13.3	6,200/6,400	3.6	95	109	45/61	270/225	1.7	208-230/60/1	2.4/2.5	15	14.9	2.7/2.5	2.6/2.4	535/550	500/520
LP093HD3B	9,300/9,500	12.7	8,000/8,200	3.6	106	120	46/61	270/225	2.6	208-230/60/1	3.1/3.5	20	19.5	3.6/3.3	3.3/3.0	720/735	655/670
LP123HD3B	12,000/12,200	11.9	10,500/11,900	3.5	106	120	50/63	420/353	3.0	208-230/60/1	3.1/3.5	20	19.5	5.2/4.8	4.6/4.3	1,010/1,025	855/905
LP153HD3B	14,900/15,100	11.2	10,500/11,900	3.1	115	129	51/64	420/353	4.3	208-230/60/1	3.1/3.5	20	19.5	6.6/6.1	6.2/5.7	1,330/1,345	1,250/1,265

PACKAGED TERMINAL AIR CONDITIONER (PTAC) 265V HEATING & COOLING MODELS

Model	Cooling Capacity (Btu/h)	EER	Heating Capacity (Btu/h)	COP	Net Weight (lbs)	Shipping Weight (lbs)	Sound Pressure IDU/ODU (dBA)	Air Circulation H/L (CFM)	Dehumidification (pts/hr)	Power Supply (V/Hz/Ph)	Electric Heater (kW)	MOP (A)	MCA (A)	Cooling Rated Amps (A)	Rated	Cooling Power Input (W)	Heating Power Input (W)
LP096CD3B	9,700	12.8			106	120	46/61	270/225	2.6	265/60/1	3.7	20	17.9	3.0		755	
LP126CD3B	12,200	11.9			106	120	50/63	420/353	3.0	265/60/1	3.7	20	17.9	4.0		1,025	

PACKAGED TERMINAL AIR CONDITIONER (PTAC) 265V HEAT PUMP MODELS

Мс	odel	Cooling Capacity (Btu/h)	EER	Heating Capacity (Btu/h)	COP	Net Weight (lbs)	Shipping Weight (lbs)	Sound Pressure IDU/ODU (dBA)	Air Circulation H/L (CFM)	Dehumidification (pts/hr)	Power Supply (V/Hz/Ph)	Electric Heater (kW)	MOP (A)	MCA (A)	Cooling Rated Amps (A)	Rated	Power Input	Heating Power Input (W)
LP09	6HD3B	9,700	12.8	8,500	3.6	106	120	46/61	270/225	2.6	265/60/1	3.7	20	17.9	3.0	2.7	755	690
LP126	6HD3B	12,200	11.9	11,000	3.6	106	120	50/63	420/353	3.0	265/60/1	3.7	20	17.9	4.0	3.5	1,025	895





