



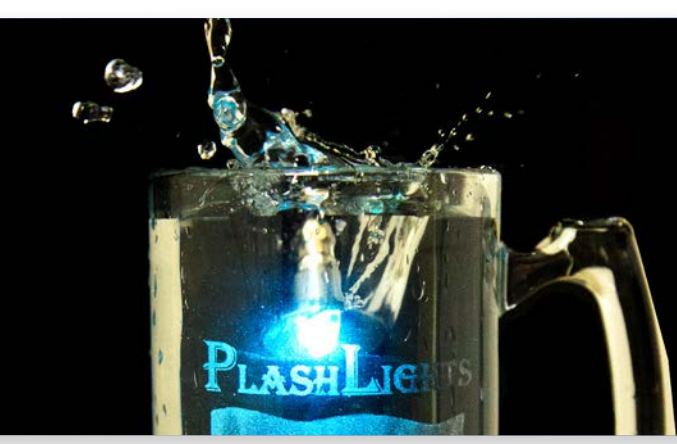


SPECIFICATIONS

Part #	LED Color	Housing	Amp Draw	Raw Lumens*	Volts
DL-BLK-WH	COOL WHITE	BLACK	140mA @ 12VDC	32LM	12VDC
DL-WHT-WH	COOL WHITE	WHITE	140mA @ 12VDC	32LM	12VDC
DL-BLK-BL	BLUE	BLACK	140mA @ 12VDC	32LM	12VDC
DL-WHT-BL	BLUE	WHITE	140mA @ 12VDC	32LM	12VDC
DL-BLK-RGB	RGB	BLACK	140mA @ 12VDC	32LM	12VDC
DL-WHT-RGB	RGB	WHITE	140mA @ 12VDC	32LM	12VDC
DL-SS-RGB	RGB	STAINLESS STEEL	140mA @ 12VDC	32LM	12VDC

DIMENSIONS

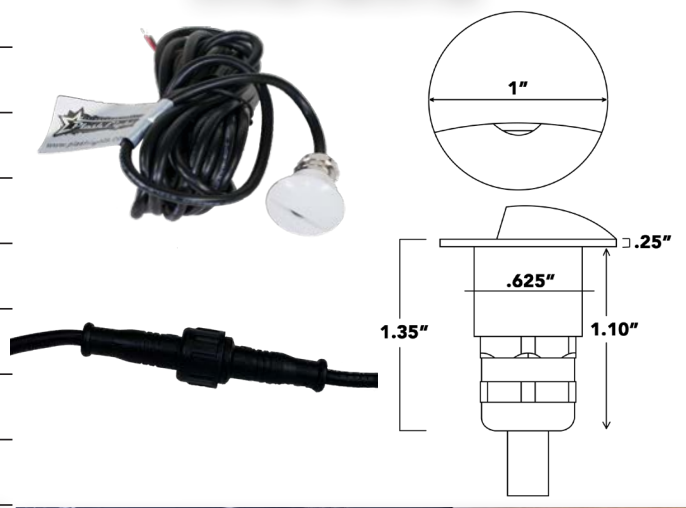

BEAM PATTERN

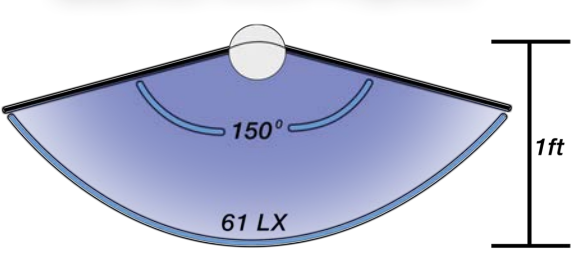

- Available in Black, White, with Aluminum or Stainless Steel Housing
- Press Fit Mounting Style
- Required Cutout: 5/8" Dia. (With 1-1/4" Bulkhead Clearance)
- Finished Clearance: 1/4"
- IP68K Rated - Fully Waterproof
- 150° Beam Angle
- Wiring: Two-Conductor, 20-Gauge Marine Grade (9Ft Cable Supplied)



* Based on LED manufacturer specifications