



PRODUCT SPECIFICATIONS


SPREADER LIGHTS

40W LOW PROFILE

SPECIFICATIONS

| Part # | Beam Pattern | Led (QTY) & Watts | Led Chip | Raw Lumens* | Volts | AMP Draw |
|--------------|--------------|-------------------|-----------|-------------|----------|----------|
| 40-LP-SC-WHT | SCENE FLOOD | 4PCS @ 10W | 10W CREE® | 3,600LM | 9-36V DC | 3.2A |
| 40-LP-FL-WHT | FLOOD | 4PCS @ 10W | 10W CREE® | 3,600LM | 9-36V DC | 3.2A |
| 40-LP-SC | SCENE FLOOD | 4PCS @ 10W | 10W CREE® | 3,600LM | 9-36V DC | 3.2A |
| 40-LP-FL | FLOOD | 4PCS @ 10W | 10W CREE® | 3,600LM | 9-36V DC | 3.2A |

- 316 Stainless Steel Hardware
- IP69K Rated
- AkzoNobel® Marine Polyester Powdercoat Coating
- Available in Black or White Housing
- Operating Temp: -40° F ~ +145°F
- Certificates: CE, RoHS, UV, Salt Spray, Vibration, RF Anti-Interference
- LED Lifespan: 50,000 Hours or 5 Years of Continuous Use
- Wide 120° Scene Flood Beam Available
- Includes 9 ft. Power Wire for Easy Installation on a T-Top or Grab Rail

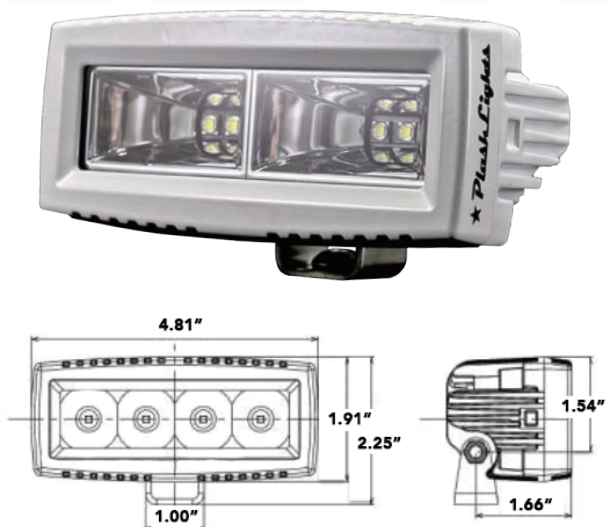


SPECIFICATIONS

20W LOW PROFILE

| Part # | Beam Pattern | Led (QTY) & Watts | Led Chip | Raw Lumens* | Volts | AMP Draw |
|--------------|--------------|-------------------|----------|-------------|----------|----------|
| 20-LP-SC-WHT | SCENE FLOOD | 2PCS @ 10W | 10W CREE | 1,800LM | 9-36V DC | 1.6A |
| 20-LP-FL-WHT | FLOOD | 2PCS @ 10W | 10W CREE | 1,800LM | 9-36V DC | 1.6A |
| 20-LP-SC | SCENE FLOOD | 2PCS @ 10W | 10W CREE | 1,800LM | 9-36V DC | 1.6A |
| 20-LP-FL | FLOOD | 2PCS @ 10W | 10W CREE | 1,800LM | 9-36V DC | 1.6A |

- 316 Stainless Steel Hardware
- IP69K Rated
- AkzoNobel® Marine Polyester Powdercoat Coating
- Available in Black or White Housing
- Operating Temp: -40° F ~ +145°F
- Certificates: CE, RoHS, UV, Salt Spray, Vibration, RF Anti-Interference
- LED Lifespan: 50,000 Hours or 5 Years of Continuous Use
- Wide 120° Scene Flood Beam Available
- Includes 9 ft. Power Wire for Easy Installation on a T-Top or Grab Rail

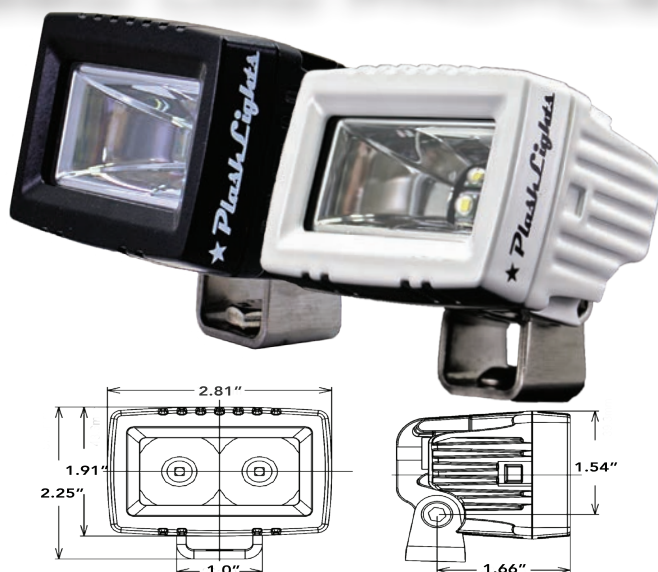

*Based on LED manufacturer specifications