




PRODUCT SPECIFICATIONS

SRX2-SERIES LED LIGHT BAR

10" TO 50"





Bezel-less anti-UV flat PC lens prevents water and bugs from sticking and makes it easier to clean.

New hooded reflector design

OSRAM 5W LED with high lux and stable luminous efficiency.



No screws on the surface protects against corrosion and improves aerodynamic design to lower the wind resistance and noise.

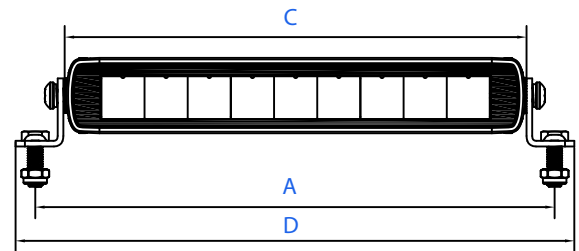

SPECIFICATIONS

DIMENSIONS

| Part # | Length | LED (QTY) & Max Watts | Raw Lumens* | AMP Draw | A | B | C | D | E | F | G |
|---------|--------|-------------------------|-------------|-------------------------------|-----|-------|-----|-----|-------|-------|-------|
| SRX2-10 | 10" | 9 X 5W OSRAM CSHP LEDS | 3,780LM | 3.5A @ 12VDC / 1.7A @ 24VDC | 11" | 2.14" | 10" | 12" | 1.85" | 1.57" | 1.17" |
| SRX2-20 | 20" | 21 X 5W OSRAM CSHP LEDS | 8,820LM | 7.9A @ 12VDC / 3.9A @ 24VDC | 22" | 2.14" | 20" | 23" | 1.85" | 1.57" | 1.17" |
| SRX2-30 | 30" | 33 X 5W OSRAM CSHP LEDS | 16,280LM | 12.3A @ 12VDC / 6.1A @ 24VDC | 32" | 2.14" | 30" | 33" | 1.85" | 1.57" | 1.17" |
| SRX2-40 | 40" | 42 X 5W OSRAM CSHP LEDS | 21,560LM | 16.7A @ 12VDC / 8.3A @ 24VDC | 42" | 2.14" | 40" | 43" | 1.85" | 1.57" | 1.17" |
| SRX2-50 | 50" | 54 X 5W OSRAM CSHP LEDS | 27,060LM | 21.1A @ 12VDC / 10.5A @ 24VDC | 52" | 2.14" | 50" | 53" | 1.85" | 1.57" | 1.17" |





PRODUCT SPECIFICATIONS

SFX-2-SERIES LED LIGHT BAR

FEATURES

- Optimal Beam Pattern to Reduce Bow Reflection
- 5W OSRAM® OSLOX CSHP LX ECE LED'S
- Extruded 6063 Aluminum Body
- Available in White or Black Housing
- Integrated Temperature Control System (TCS)
- 9~32VDC Input
- High Lux - High Output
- Durable Scratch Resistant High Impact Polycarbonate Lens
- IP67 Rated
- 6000K (Cool White)
- New Design to Improve Aerodynamics (Noise Reducers are Not Required)
- Chrome Coated Stainless Hardware to Eliminate Dissimilar Metal
- 50,000 Hours or 5 Years of Continuous Use
- Over / Under and Reverse Polarity Protection
- VHF and AIS Safe
- Protected Against Electromagnetic (EMC) & Radio Frequency Interference (RFI)
- Operating Temp: -40°F- +145°F
- MILITARY 810-STD 8.6G Vibration Compliant



INCLUDES

- (2) Chrome Coated Mounting Brackets
- Chrome Coated Stainless Steel Hardware
- Copper Tinned Marine Grade Extended Power Wire - 9ft

BEAM PATTERN

